

Data Report

NBP0301

Bruce Luyndyk-Lou Bartek

January 5-January 30, 2003



United States Antarctic Program

RVIB Nathaniel B. Palmer

Raytheon Polar Services

Data Report Prepared by:
Kathleen Gavahan, Suzanne O'Hare
Rob Hodnet, Jim Dolan

Table of Contents

| | |
|--|-----------|
| INTRODUCTION | 1 |
| DISTRIBUTION CONTENTS AT A GLANCE..... | 2 |
| EXTRACTING DATA..... | 2 |
| DISTRIBUTION CONTENTS | 3 |
| CRUISE INFORMATION | 3 |
| <i>Cruise Track</i> | 3 |
| <i>Satellite Images</i> | 3 |
| <i>Science Report</i> | 3 |
| NBP DATA PRODUCTS..... | 3 |
| <i>JGOFS</i> | 3 |
| <i>MGD77</i> | 4 |
| SCIENCE OF OPPORTUNITY | 5 |
| <i>ADCP</i> | 5 |
| <i>PCO₂</i> | 6 |
| CRUISE SCIENCE..... | 6 |
| <i>CTD</i> | 6 |
| <i>XBT, XCTD</i> | 6 |
| RVDAS..... | 6 |
| <i>Sensors and Instruments</i> | 6 |
| Underway Sensors..... | 7 |
| Meteorology and Radiometry..... | 7 |
| Geophysics..... | 7 |
| Oceanography | 7 |
| Navigational Instruments | 7 |
| <i>Data</i> | 8 |
| Underway Data..... | 8 |
| Meteorology (met1)..... | 8 |
| Gravimeter (grv1)..... | 8 |
| Bathy 2000 (bat1)..... | 9 |
| Thermosalinograph (tsg1)..... | 10 |
| Fluorometer (flr1)..... | 10 |
| pCO ₂ | 11 |
| Navigational Data..... | 11 |
| Seapath GPS (seap)..... | 11 |
| Ashtech GPS (3df1)..... | 13 |
| Trimble P-Code GPS (PCOD) | 14 |
| Gyro Compass (gyr1)..... | 16 |
| NGL System (ngl1)..... | 16 |
| ADCP Course (adcp)..... | 16 |
| Sound Velocity Probe (svp1) | 16 |
| OCEAN..... | 17 |
| pCO ₂ -merged | 17 |
| tsgfl..... | 17 |
| CALCULATIONS | 18 |
| TSG | 18 |
| PAR..... | 18 |
| PIR | 18 |
| PSP | 19 |
| ACQUISITION PROBLEMS AND EVENTS..... | 20 |
| APPENDIX: SENSORS AND CALIBRATIONS..... | 22 |
| NBP 0301 SENSORS:..... | 22 |

| | |
|---|----|
| <i>Shipboard Sensors</i> | 22 |
| <i>NBP 0301 CTD Sensors</i> | 23 |
| CALIBRATIONS | 23 |
| GRAVITY TIE | 24 |
| METEOROLOGY SYSTEM..... | 25 |
| <i>Anemometer (Port)</i> | 25 |
| <i>Anemometer (Starboard)</i> | 26 |
| <i>PIR (Mast)</i> | 27 |
| <i>PSP (Mast)</i> | 28 |
| <i>GUV (Mast)</i> | 29 |
| <i>GUV (Mast)</i> | 30 |
| <i>PAR (mast)</i> | 31 |
| TSG CALIBRATION FILES | 32 |
| <i>Underway Conductivity (Wet Lab)</i> | 32 |
| <i>Underway Temperature Sensor (Wet Lab)</i> | 33 |
| <i>Underway Remote Temperature Sensor (Wet Lab)</i> | 34 |
| <i>Underway Transmissometer (Wet Lab)</i> | 35 |
| PRESSURE SENSOR (CTD) | 36 |
| <i>Primary Temperature Sensor (CTD)</i> | 37 |
| <i>Secondary Temperature Sensor (CTD)</i> | 38 |
| <i>Dissolved Oxygen Sensor (1) (CTD)</i> | 39 |
| <i>PAR (CTD)</i> | 40 |
| <i>Transmissometer (CTD)</i> | 41 |
| <i>Primary Conductivity Sensor (CTD)</i> | 42 |
| <i>Secondary Conductivity Sensor (CTD)</i> | 43 |
| <i>Fluorimeter (CTD)</i> | 44 |

Introduction

The NBP data acquisition systems continuously logs data from the instruments used during the cruise. This document describes:

- The structure and organization of the data on the distribution media
- The format and contents of the data strings
- Formulas for calculating values
- Information about the specific instruments in use during the cruise
- A log of acquisition problems and events during the cruise that may affect the data
- Scanned calibration sheets for the instruments in use during the cruise.

The data is distributed on a DVD-ROM written in ISO9660 level-1 format. It is readable by virtually every computing platform.

All the data has been compressed using Unix “gzip,” identifiable by the “.gz” extension. It has been copied to the distribution media in the Unix tar archive format, “.tar” extension. Tools are available on all platforms for uncompressing and de-archiving these formats: On Macintosh, use Stuffit Expander with DropStuff. On Windows operating systems use WinZip.

IMPORTANT: Read the last section, “Acquisition Problems and Events,” for important information that may affect the processing of this data.

Distribution Contents at a Glance

| Volume 1 | |
|----------------------------|--|
| 0301data.doc (this report) | process/ 0301jgof.tar |
| NBP0301.trk | 0301mgd.tar |
| NBP0301.mgd | 0301proc.tar |
| NBP0301.gmt | 0301qcps.tar |
| | ocean/ 0301xبت.tar |
| rvdas/uw 0301bat.tar | inst.cof |
| 0301eng.tar | the instrument coefficients file entered |
| 0301grv.tar | into the computer at the beginning of |
| 0301mag.tar | the cruise |
| 0301mbdp.tar | |
| 0301met.tar | other/ 0301batw.zip |
| 0301oyo.tar | |
| 0301pco2.tar | |
| 0301syn.tar | |
| 0301tsg.tar | |
| rvdas/nav 0301adcp.tar | |
| 0301adu1.tar | |
| 0301gyr1.tar | |
| 0301PCOD.tar | |
| 0301seap.tar | |

Extracting Data

The Unix tar command has many options. It is often useful to know exactly how an archive was produced when expanding its contents. All archives were created using the command,

```
tar cvf archive_filename files_to_archive
```

To create a list of the files in the archive, use the Unix command,

```
tar tvf archive_filename > contents.list
```

where `contents.list` is the name of the file to create

To extract the files from the archive:

```
tar xvf archive_filename file(s)_to_extract
```

G-zipped files will have a “.gz” extension on the filename. These files can be decompressed after de-archiving, using the Unix command,

```
gunzip filename.gz
```

Distribution Contents

Cruise Information

Cruise Track

The distribution CD includes a GMT cruise track file (NBP0301.trk). It contains the longitude and latitude at one-minute intervals extracted from the NBP0301.gmt file.

PostScript cruise tracks can be produced from this file

Satellite Images

N/A

Satellite Images processed for this cruise can be found in the directory, /Imagery in two subdirectories, ice and wx (weather). Files are named using the convention, IDDDDYA.jpg where:

ID = image type (is = ice ssmi, iv = ice visible, cw = seawifs, wx = weather)
 DDD = year-day
 YY = year
 A = allows for multiple images of one type for one day

Science Report

Separate Section

NBP Data Products

Two datasets are created on each cruise: JGOFS and MGD77.

JGOFS

The JGOFS data set consists of a single file produced each day named jgDDD.dat.gz where DDD is the year-day the data was acquired. The “.gz” extension indicates that the individual files are compressed before archiving. The daily file consists of 22 columnar fields in text format described in the table below. The JGOFS data set is obtained primarily by applying calibrations to raw data and decimating to whole minute intervals. Several fields are derived measurements from more than a single raw input. For example, Course Made Good (CMG) and Speed Over Ground (SOG) are calculated from gyro and GPS inputs by the NGL software package. During the cruise, the JGOFS data set produces the daily data plots. Note: Null, unused, or unknown fields are indicated as “NAN” in the JGOFS data.

| Field | Data | Units |
|-------|----------------------------------|------------------------------------|
| 01 | GMT date | Dd/mm/yy |
| 02 | GMT time | Hh:mm:ss |
| 03 | NGL latitude (negative is South) | tt.tttt |
| 04 | NGL longitude (negative is West) | Ggg.gggg |
| 05 | Speed over ground | Knots |
| 06 | GPS HDOP | - |
| 07 | Gyro Heading | Degrees (azimuth) |
| 08 | Course made good | Degrees (azimuth) |
| 09 | Mast PAR | □Einsteins/meters ² sec |

| Field | Data | Units |
|-------|---|-------------------|
| 10 | Sea surface temperature | °C |
| 11 | Sea surface conductivity | Siemens/meter |
| 12 | Sea surface salinity | PSU |
| 13 | Sea depth (uncorrected, calc. Sw sound vel. 1500 m/s) | Meters |
| 14 | True wind speed (port windbird) | Meters/sec |
| 15 | True wind direction (port windbird) | Degrees (azimuth) |
| 16 | Ambient air temperature | °C |
| 17 | Relative humidity | % |
| 18 | Barometric pressure | MBar |
| 19 | Sea surface fluorometry | Volts (0-5 FSO) |
| 20 | Not used | - |
| 21 | PSP | W/m ² |
| 22 | PIR | W/m ² |

MGD77

The MGD77 data set is contained in a single file for the entire cruise. It can be found in the top level of the distribution data structure as NBP 0301.mgd. Also at the root level, NBP 0301.gmt is the output of the mgd77togmt utility using NBP 0301.mgd as input. The NBP 0301.gmt file can be used by GMT plotting software.

The data used to produce the NBP 0301.mgd file can be found on the distribution media in the file /process/NBP 0301proc.tar. The data files in the PROC directory of the archive contain a day's data and follow the naming convention Dddd.fnl.gz, where ddd is the year-day. These files follow a space-delimited columnar format that may be more accessible for some purposes. They contain data at one-second intervals rather than one minute and are individually "gzipped" to save space. Below is a detailed description of the MGD77 data set format. The other directories in the archive contain interim processing files and are included to simplify possible reprocessing of the data using the RVDAS NBP processing scripts.

All decimal points are implied. Leading zeros and blanks are equivalent. Unknown or unused fields are filled with 9's. All "corrections", such as time zone, diurnal magnetics, and EOTVOS, are understood to be added.

| Col | Len | Type | Contents | Description, Possible Values, Notes |
|-------|-----|------|--------------------------------|--|
| 1 | 1 | Int | Data record type | Set to "3" for data record |
| 2-9 | 8 | Char | Survey identifier | |
| 10-14 | 5 | int | Time zone correction | In hundredths of hours. Corrects time (in characters 13-27) to GMT when added; 0 = GMT |
| 15-16 | 2 | int | Year | 2 digit year |
| 17-18 | 2 | int | Month | 2 digit month |
| 19-20 | 2 | int | Day | |
| 21-22 | 2 | int | Hour | |
| 23-27 | 5 | real | Minutes x 1000 | |
| 28-35 | 8 | real | Latitude x 100000 | + = North - = South. (-9000000 to 9000000) |
| 36-44 | 9 | real | Longitude x 100000 | + = East - = West. (-18000000 to 18000000) |
| 45 | 1 | int | Position type code | 1=Observed fix 3=Interpolated 9=Unspecified |
| 46-51 | 6 | real | Bathymetry, 2- way travel time | In 10,000th of seconds. Corrected for transducer depth and other such |

| Col | Len | Type | Contents | Description, Possible Values, Notes |
|---------|-----|------|---|---|
| | | | | corrections |
| 52-57 | 6 | real | Bathymetry, corrected depth | In tenths of meters. |
| 58-59 | 2 | int | Bathymetric correction code | This code details the procedure used for determining the sound velocity correction to depth |
| 60 | 1 | int | Bathymetric type code | 1 = Observed 3 = Interpolated (Header Seq. 12) 9 = Unspecified |
| 61-66 | 6 | real | Magnetics total field, 1 ST sensor | In tenths of nanoteslas (gammas) |
| 67-72 | 6 | real | Magnetics total field, 2 ND sensor | In tenths of nanoteslas (gammas), for trailing sensor |
| 73-78 | 6 | real | Magnetics residual field | In tenths of nanoteslas (gammas). The reference field used is in Header Seq. 13 |
| 79 | 1 | int | Sensor for residual field | 1 = 1 st or leading sensor 2 = 2 nd or trailing sensor 9 = Unspecified |
| 80-84 | 5 | real | Magnetics diurnal correction | In tenths of nanoteslas (gammas). (In nanoteslas) if 9-filled (i.e., set to "+9999"), total and residual fields are assumed to be uncorrected; if used, total and residuals are assumed to have been already corrected. |
| 85-90 | 6 | F6.0 | Depth or altitude of magnetics sensor | (In meters) + = Below sea level 3 = Above sea level |
| 91-97 | 7 | real | Observed gravity | In 10 th of mgals. Corrected for Eotvos, drift, tares |
| 98-103 | 6 | real | EOTVOS correction | In tenths of mgals. $E = 7.5 V \cos \phi \sin \alpha + 0.0042 V^2$ |
| 104-108 | 5 | real | Free-air anomaly | In tenths of milligals G = observed G = theoretical |
| 109-113 | 5 | char | Seismic line number | Cross-reference for seismic data |
| 114-119 | 6 | char | Seismic shot-point number | |
| 120 | 1 | int | Quality code for navigation | 5= Suspected, by the originating institution 6= Suspected, by the data center 9= No identifiable problem found |

Science of Opportunity

ADCP

The shipboard ADCP system measures currents in the depth range from about 30 to 300 m -- in good weather. In bad weather or in ice, the range is less, and sometimes no valid measurements are made. It is the USAP-funded project of Eric Firing (University of Hawaii) and Teri Chereskin (Scripps Institution of Oceanography). ADCP data collection occurs on the both LMG and the NBP for the benefit of the scientists on individual cruises, and for the long-term goal of building a climatology of current structure in the Southern Ocean.

The ADCP data set collected during this cruise has been placed in the file `coadcp.zip`. Each file represents 24 hours of data collection. The files are named `pingdata.xxx` where `xxx` is a day number that is NOT a year-day. For the date, use the file's creation date.

Some ADCP data is also transmitted to RVDAS. East and north vectors for ship's speed relative to the reference layer and ship's heading are archived as `0301adcp.tar` in the file `/other/0301adcp.zip`

PCO₂

The NBP carries Lamont-Doherty Earth Observatory's (LDEO) pCO₂ system and RPSC staff maintains it. Data is sent to LDEO at the end of each cruise. The pCO₂ data is transmitted and archived on RVDAS. You will find it in a file named `0301pco2.tar` in the `/rvas/uw` directory, which contains the pCO₂ instrument's data merged with GPS, meteorological and other oceanographic measurements. For more information contact Colm Sweeney (csweeney@ldeo.columbia.edu) for additional information.

Cruise Science

CTD

No CTDs this cruise.

XBT, XCTD

During the cruise Expendable Bathythermographs and Expendable CTDs were used to obtain water column temperature profiles. The data files from these launches are included in the file `/ocean/0301xbt.tar`

RVDAS

The Research Vessel Data Acquisition System (RVDAS) was developed at Lamont-Doherty Earth Observatory of Columbia University and has been in use on its research ship for several years. It has been adapted for use on the USAP research vessels.

Daily data processing of the RVDAS (Research Vessel Data Acquisition System) data is performed to convert values into useable units and as a check of the proper operation of the DAS. Both raw and processed data sets from RVDAS are included in the data distribution. The tables below provide detailed information on the data. Be sure to read the "Significant Acquisition Events" section for important information about data acquisition during this cruise.

Sensors and Instruments

RVDAS data is divided into two general categories, *underway and navigation*. They can be found on the distribution media as `/rvas/uw` and `/rvas/nav`. Processed oceanographic data is in `/process`. Each instrument or sensor produces a data file named with its channel ID. Each data file is g-zipped to save space on the distribution media. Not all data types are collected every day or on every cruise.

The naming convention for data files produced by the sensors and instruments is

NBP[CruiseID][ChannelID].dDDD

Example: `NBP0107.met1.d317`

- The CruiseID is the numeric name of the cruise, in this case, NBP 02-07.

- The Channel ID is a 4-character code representing the system being logged. An example is "met1," the designation for meteorology.
- DDD is the day of year the data was collected

Underway Sensors

Meteorology and Radiometry

| Measurement | Channel ID | Collect. Status | Rate | Instrument |
|----------------------|------------|-----------------|-------|---------------------|
| Air Temperature | met1 | Continuous | 1 sec | R. M. Young 41372LC |
| Relative Humidity | met1 | Continuous | 1 sec | |
| Wind Speed/Direction | met1 | Continuous | 1 sec | R.M. Young 05106 |
| Barometer | met1 | Continuous | 1 sec | R.M. Young 61201 |
| PIR (LW radiation) | met1 | Continuous | 1 sec | Eppley PIR |
| PSP (SW radiation) | met1 | Continuous | 1 sec | Eppley PSP |
| PAR | met1 | Continuous | 1 sec | BSI QSR-240 |
| GUV | guv | Continuous | | BSI PUV-511 |
| PUV | puv | not collected | | BSI PUG-500 |

Geophysics

| Measurement | Channel ID | Collect. Status | Rate | Instrument |
|--------------|------------|-----------------|---------|--------------------|
| Gravimeter | grv1 | Continuous | 10 sec* | LaCoste & Romberg |
| Magnetometer | mag1 | Not collected | 15 sec | EG&G G-866 |
| Bathymetry | bat1 | Collected | Varies | ODEC Bathy 2000 |
| Bathymetry | knu1 | Not collected | Varies | Knudsen 320B/R |
| Bathymetry | sim1 | Not Collected | Varies | Simrad EK500 Sonar |

*Data is output every second but it only changes every 10 seconds.

Oceanography

| Measurement | Channel ID | Collect. Status | Rate | Instrument |
|------------------|-------------|-----------------|--------|----------------------|
| Conductivity | tsg1 | Continuous | 6 sec | SeaBird 21 |
| Salinity | tsgfl | Continuous | 6 sec | Calc. From pri. temp |
| Sea Surface Temp | tsg1 | Continuous | 6 sec | SeaBird 3-01/S |
| Fluorometry | flr1 | Continuous | 1 sec | Turner 10-AU-005 |
| Fluorometry | flr1 & tsg1 | Continuous | 6 sec | |
| Transmissometry | tsg1 | Continuous | 6 sec | WET Lab C-Star |
| pCO ₂ | pco2 | Continuous | 70 sec | (LDEO) |
| ADCP | adcp | Continuous | varies | RD Instruments |

Navigational Instruments

| Measurement | Channel ID | Collect. Status | Rate | Instrument |
|--------------|------------|-----------------|-------|--------------|
| Attitude GPS | 3df1 | Continuous | 1 sec | Ashtech ADU2 |

| Measurement | Channel ID | Collect. Status | Rate | Instrument |
|-------------|------------|-----------------|---------|--------------------|
| P-Code GPS | PCOD | Continuous | 1 sec | Trimble 20636-00SM |
| Gyro | gyr1 | Continuous | 0.2 sec | Yokogawa Gyro |
| NGL | ngl1 | Continuous | 1 sec | NGL Processed Data |

Data

Data is received from the RVDAS system via RS-232 serial connections. A time tag is added at the beginning of each line of data in the form,

```
yy+dd:hh:mm:ss.sss [data stream from instrument]
```

where

yy = two-digit year

ddd = day of year

hh = 2 digit hour of the day

mm = 2 digit minute

ss.sss = seconds

All times are reported in UTC.

The delimiters that separate fields in the raw data files are often spaces and commas but can be other characters such as : = @. Occasionally no delimiter is present. Care should be taken when reprocessing the data that the field's separations are clearly understood.

In the sections below a sample data string is shown, followed by a table that lists the data contained in the string.

Underway Data

Meteorology (met1)

```
01+322:00:03:27.306 04.5 292 010 05.7 294 010 0959.6 000.2 093 -000.1537
0001.0886 0012.8248
```

| Field | Data | Units |
|-------|---|-------|
| 1 | RVDAS time tag | |
| 2 | Port anemometer speed (relative) | m/s |
| 3 | Port anemometer direction (relative) | deg |
| 4 | Port anemometer standard deviation | deg |
| 5 | Starboard anemometer speed (relative) | m/s |
| 6 | Starboard anemometer direction (relative) | deg |
| 7 | Starboard anemometer standard deviation | deg |
| 8 | Barometer | mBar |
| 9 | Air temperature | °C |
| 10 | Relative humidity | % |
| 11 | PSP (short wave radiation)* | mV |
| 12 | PIR (long wave radiation)* | mV |
| 13 | PAR (photosynthetically available radiation)* | mV |

*See page 18 for calculations.

Gravimeter (grv1)

99+099:00:18:19.775 your_line#1999 99 01818 9735.4

| Field | Data | Conversion | Units |
|-------|---------------------|--------------------------------|-------|
| 1 | RVDAS time tag | | |
| 2 | Text string | | |
| 3 | Gravity device date | Yyyymmddhhmmss | |
| 4 | Gravity count | mgal = count x 1.0047 + offset | count |

Bathy 2000 (bat1)

00+019:23:59:53.901 ;I04485.3ME -23.0, I00000.0,-99.9,00000@01/11/00, 23:59:52.08

PW2 PF1 SF1 PL3 MO4 SB3 PO0 TX1 TR: GM5 1500 06.7 -72.1

| Field | Data | Format / Possible Values | Units |
|-------|---|---|--------|
| 1 | RVDAS time tag | | |
| 2 | Flagged low frequency chn. Depth w/ units | ;FDDDDD.Dun where F = flag (V for valid, I for invalid), D=depth, un = units | meters |
| 3 | Low Frequency echo strength | EEE.EE | dB |
| 4 | Flagged high freq. chn. depth | not used | |
| 5 | High frequency echo strength | not used | |
| 6 | Signed heave data | SHHHH | cm |
| 7 | Date | mm/dd/yy | |
| 8 | Time | hh:mm:ss | |
| 9 | Transmit pulse window type | PW1=Rectangular PW2=Hamming PW3=Cosine PW4=Blackman | |
| 10 | Primary transmit frequency | PF1=3.5 kHz PF2=12.0 kHz | kHz |
| 11 | Parametric mode secondary frequency | SF1=3.5 kHz SF2=12.0 kHz | kHz |
| 12 | Pulse length | PL1=200usec PL2=500usec PL3=1msec PL4=2msec PL5=5msec PL6=10msec PL7=25msec If transmit mode is FM: PL1=25msec PL2=50msec PL3=100msec | |
| 13 | Operating mode | MO1=CW parametric MO2=CW MO3=FM parametric MO4=FM | |
| 14 | Frequency sweep bandwidth | SB1=1 kHz SB2=2 kHz SB3=5 kHz | kHz |
| 15 | Power level | PO1 = 0dB PO2 = -6dB PO3 = -12dB PO4 = -18dB PO5 = -24dB | |

| Field | Data | Format / Possible Values | Units |
|-------|---|--|--------|
| | | PO6 = -30dB PO6 = -30 dB PO7 = -36dB PO8 = -42dB | |
| 16 | Transmit mode | TX1=single ping active TX2=pinger listen TX3=multipinging TR TX4=multipinging TR TX5=multipinging TTRR TX6=multipinging TTTTRRRR TX7=multipinging TTTTTRRRRR | |
| 17 | Transmit Rate | TR3 = 4Hz TR4 = 2Hz TR5 = 1Hz TR6 = .5Hz TR7 = .33Hz TR8 = .25Hz TR9 = .20Hz TR: = .10Hz TR; = .05Hz | Hz |
| 18 | System gain mode | GM0=hydrographic AGC GM1 to GM9=hydrographic +3db to + 27db manual. GMA to GMD=hydrographic + 30db through + 60db manual GME to GMK=sub-bottom 1 through sub-bottom 7 | |
| 19 | Speed of sound | | m/sec |
| 20 | Depth of sonar window below sea-level | | meters |
| 21 | Background noise level in fixed point reference | | dB/V |

Thermosalinograph (tsg1)

00+019:23:59:46.976 15A16CFC163F8C2C100

| Field | Data | Units |
|-------|---|-------|
| 1 | RVDAS time tag | |
| 2 | Seabird hex string (see page 18 for conversion to real units) | |

Fluorometer (flr1)

00+019:23:59:58.061 0 0818 :: 1/19/00 17:23:17 = 0.983 (RAW) 1.2 (C)

| Field | Data | Units |
|-------|----------------|----------|
| 1 | RVDAS time tag | |
| 2 | Marker 0 to 8 | |
| 3 | 4-digit index | |
| 4 | Date | mm/dd/yy |

| Field | Data | Units |
|-------|-----------------------------|----------|
| 5 | Time | hh:mm:ss |
| 6 | Signal | |
| 7 | signal units of measurement | |
| 8 | cell temperature | |
| 9 | Temperature units | |

pCO₂

00+021:23:59:43.190 2000021.9992 2382.4 984.2 30.73 50.8 345.9 334.1 -1.70 -68.046
-144.446 Equil

| Field | Data | Units |
|-------|---|----------------------|
| 1 | RVDAS time tag | |
| 2 | pCO ₂ time tag (decimal is fractional time of day) | yyyddd.ttt |
| 3 | Raw voltage | mV |
| 4 | Barometer | mBar |
| 5 | Cell temperature | °C |
| 6 | Flow rate | cm ³ /min |
| 7 | Concentration | ppm |
| 8 | pCO ₂ pressure | microAtm |
| 9 | Equilibrated temperature | °C |
| 10 | Latitude (not collected) | |
| 11 | Longitude (not collected) | |
| 10 | Flow source (Equil = pCO ₂ measurement) | |

Navigational Data

Seapath GPS (seap)

The Seapath GPS outputs six data strings, four in NMEA format and two in proprietary PSXN format:

- INZDA
- INGGA
- INVTG
- INHDT
- PSXN, 22
- PSXN, 23

INZDA

02+253:00:00:00.772 \$INZDA,235947.70,09,09,2002,,*7F

| Field | Data | Units |
|-------|----------------|-----------|
| 1 | RVDAS time tag | |
| 2 | \$INZDA | |
| 3 | time | hhmmss.ss |
| 4 | Day | dd |
| 5 | Month | mm |

| Field | Data | Units |
|-------|---------------|-------|
| 6 | Year | yyyy |
| 7 | (empty field) | |
| 8 | Checksum | |

INGGA

02+253:00:00:00.938

INGGA,235947.70,6629.239059,S,06827.668899,W,1,07,1.0,11.81,M,,M,,*6F

| Field | Data | Units |
|-------|--|-------------|
| 1 | RVDAS time tag | |
| 2 | \$INGGA | |
| 3 | time | hhmmss.ss |
| 4 | Latitude | ddmm.mmmmmm |
| 5 | N or S for north or south latitude | |
| 6 | Longitude | ddmm.mmmmmm |
| 7 | E or W for east or west longitude | |
| 8 | GPS quality indicator, 0=invalid, 1=GPS SPS, 2=DGPS, 3=PPS, 4=RTK, 5=float RTK, 6=dead reckoning | |
| 9 | number of satellites in use (00-99) | |
| 10 | HDOP | x.x |
| 9 | height above ellipsoid in meters | m.mm |
| 11 | M | |
| 12 | (empty field) | |
| 13 | M | |
| 14 | age of DGPS corrections in seconds | s.s |
| 15 | DGPS reference station ID (0000-1023) | |
| 16 | Checksum | |

INVTG

02+253:00:00:00.940 \$INVTG,19.96,T,,M,4.9,N,,K,A*39

| Field | Data | Units |
|-------|----------------------------------|-------|
| 1 | RVDAS time tag | |
| 2 | \$INVTG | |
| 3 | course over ground, degrees true | d.dd |
| 4 | T | |
| 5 | , | |
| 6 | M | |
| 7 | speed over ground in knots | k.k |
| 8 | N | |
| 9 | , | |
| 10 | K | |
| 11 | Mode | |
| 12 | Checksum | |

INHDT

02+253:00:00:00.941 \$INHDT,20.62,T*23

| Field | Data | Units |
|-------|----------------|-------|
| 1 | RVDAS time tag | |
| 2 | \$INHDT | |
| 3 | Heading | |

| Field | Data | Units |
|-------|----------|-------|
| 4 | T | |
| 5 | Checksum | |

PSXN,22

02+253:00:00:00.942 \$PSXN,22,0.43,0.43*39

| Field | Data | Units |
|-------|---|-------|
| 1 | RVDAS time tag | |
| 2 | \$PSXN | |
| 3 | 22 | |
| 4 | gyro calibration value since system start-up in degrees | d.dd |
| 5 | short term gyro offset in degrees | d.dd |
| 6 | Checksum | |

PSXN,23

02+253:00:00:02.933 \$PSXN,23,0.47,0.57,20.62,0.03*0C

| Field | Data | Units |
|-------|---|-------|
| 1 | RVDAS time tag | |
| 2 | \$PSXN | |
| 3 | 23 | |
| 4 | roll in degrees, positive with port side up | d.dd |
| 5 | pitch in degrees, positive with bow up | d.dd |
| 6 | heading | |
| 7 | heave in meters, positive down | m.mm |
| 8 | Checksum | |

Ashtech GPS (3df1)

The Ashtech GPS outputs three NMEA standard data strings:

- Measurement data (PBN)
- Attitude data (ATT)
- GPS position fix (GGA)

Measurement data (PBN)

01+324:00:00:00.064 \$PASHR,PBN,172812.00,2129908.6,-1869076.7,-5694992.4,
 -063:41.9477,-041:16.0918,00066.2,000.16,002.85,-000.90,08,????,02,01,01,
 01*3A

| Field | Data | Units |
|-------|---------------------------|---------|
| 1 | RVDAS time tag | |
| 2 | \$PASHR | |
| 3 | PBN | |
| 4 | GPS Time sec. of the week | seconds |
| 5 | Station Position: ECEF X | meters |
| 6 | Station Position: ECEF Y | meters |
| 7 | Station Position: ECEF Z | meters |
| 8 | Latitude (- = South) | deg:min |
| 9 | Longitude (- = West) | deg:min |
| 10 | Altitude | meters |
| 11 | Velocity8 in ECEF X | m/sec |

| Field | Data | Units |
|-------|---------------------------|-------|
| 12 | Velocity in ECEF Y | m/sec |
| 13 | Velocity in ECEF Z | m/sec |
| 14 | Number of satellites used | |
| 15 | Site name | |
| 16 | PDOP | |
| 17 | HDOP | |
| 18 | VDOP | |
| 19 | TDOP | |

GPS Position Fix – Geoid/Ellipsoid (GGA)

01+324:00:00:00.323 \$GPGGA,235959.00,6341.9477,S,04116.0918,W,1,08,00.9,
+00066,M,,M,,*77

| Field | Data | Units |
|-------|--|-----------|
| 1 | RVDAS time tag | |
| 2 | \$GPGGA | |
| 3 | UTC time at position | hhmmss.ss |
| 4 | Latitude | ddmm.mmm |
| 5 | North (N) or South (S) | |
| 6 | Longitude | ddmm.mmm |
| 7 | East (E) or West (W) | |
| 8 | GPS quality: (1 = GPS, 2 = DGPS) | |
| 9 | Number of GPS satellites used | |
| 10 | HDOP | |
| 11 | Antenna height | meters |
| 12 | M for Meters | |
| 13 | Geoidal height (no data in the sample string) | meters |
| 14 | M for meters | |
| 15 | Age of diff. GPS data (no data in the sample string) | |
| 16 | Differential reference station ID (no data in the sample string) | |
| 17 | Checksum (no delimiter before this field) | |

Attitude Data (ATT)

01+324:00:00:00.845 \$PASHR,ATT,172813.0,137.88,+000.52,-001.41,0.0029,
0.0254,0*2F

| Field | Data | Units |
|-------|------------------------------|---------|
| 1 | RVDAS Time tag | |
| 2 | \$PASHR | |
| 3 | ATT | |
| 4 | GPS Time sec. Of the week | seconds |
| 5 | Heading (rel. to true North) | degrees |
| 6 | Pitch | degrees |
| 7 | Roll | degrees |
| 8 | Measurement RMS error | meters |
| 9 | Baseline RMS error | meters |
| 10 | Attitude reset flag | |

Trimble P-Code GPS (PCOD)

The PCode GPS outputs three NMEA standard data strings:

- Position fix (GGA)

- Latitude / longitude (GLL),
- Track and ground speed (VTG)

GGA: GPS Position Fix – Geoid/Ellipsoid

01+319:00:04:11.193 \$GPGGA,000410.312,6227.8068,S,06043.6738,W,1,06,1.0,
031.9,M,-017.4,M,,*49

| Field | Data | Units |
|-------|--|------------|
| 1 | RVDAS Time tag | |
| 2 | \$GPGGA | |
| 3 | UTC time at position | hhmmss.sss |
| 4 | Latitude | ddmm.mmm |
| 5 | North (N) or South (S) | |
| 6 | Longitude | ddmm.mmm |
| 7 | East (E) or West (W) | |
| 8 | GPS quality: 0 = Fix not available or invalid 1 = GPS, SPS mode, fix valid 2 = DGPS (differential GPS), SPS mode, fix valid 3 = P-CODE PPS mode, fix valid | |
| 9 | Number of GPS satellites used | |
| 10 | HDOP (horizontal dilution of precision) | |
| 11 | Antenna height | meters |
| 12 | M for meters | |
| 13 | Geoidal height | meters |
| 14 | M for meters | |
| 15 | Age of differential GPS data (no data in the sample string) | |
| 16 | Differential reference station ID (no data in the sample string) | |
| 17 | Checksum (no delimiter before this field) | |

GLL: GPS Latitude/Longitude

01+319:00:04:11.272 \$GPGLL,6227.8068,S,06043.6738,W,000410.312,A*32

| Field | Data | Units |
|-------|----------------------------|------------|
| 1 | RVDAS Time tag | |
| 2 | \$GPGLL | |
| 3 | Latitude | degrees |
| 4 | North or South | |
| 5 | Longitude | degrees |
| 6 | East or West | |
| 7 | UTC of position | hhmmss.sss |
| 8 | Status of data (A = valid) | |
| 9 | Checksum | |

VTG: GPS Track and Ground Speed

01+319:00:04:11.273 \$GPVTG,138.8,T,126.0,M,000.0,N,000.0,K*49

| Field | Data | Units |
|-------|------------------|---------|
| 1 | RVDAS time tag | |
| 2 | \$GPVTG | |
| 3 | Heading | degrees |
| 4 | Degrees true (T) | |
| 5 | Heading | degrees |

| Field | Data | Units |
|-------|----------------------|-------|
| 6 | Degrees magnetic (M) | |
| 7 | Ship speed | knots |
| 8 | N = knots | |
| 9 | Speed | km/hr |
| 10 | K = km per hour | |
| 11 | Checksum | |

Gyro Compass (gyr1)

00+019:23:59:59.952 \$HEHRC 25034,-020*73

| Field | Data | Units |
|-------|---|---------|
| 1 | RVDAS time tag | |
| 2 | \$HEHRC | |
| 3 | Heading XXXXX = ddd.dd | degrees |
| 4 | Rate of change SYYY S = +/-, YYY = r.rr | |
| 5 | Checksum | |

NGL System (ngl1)

00+019:23:59:59.857 -68.82822,-137.21416,1.10,279.27,251.10,0.00,0.00,0,
18.2587,1,1146973

| Field | Data | Units |
|-------|------------------------------|---------|
| 1 | RVDAS time tag | |
| 2 | Latitude (south is negative) | degrees |
| 3 | Longitude (west is negative) | degrees |
| 4 | Ship speed | knots |
| 5 | Course made good | degrees |
| 6 | Gyro heading | degrees |
| 7 | PDOP | |
| 8 | HDOP | |
| 9 | Quality | |
| 10 | GPS up | |
| 11 | Fix Number | |
| 12 | | |

ADCP Course (adcp)

00+019:23:59:59.099 \$PUHAW,UVH,-1.48,-0.51,250.6

| Field | Data | Units |
|-------|--|---------|
| 1 | RVDAS time tag | |
| 2 | \$PUHAW | |
| 3 | UVH (E-W, N-S, Heading) | |
| 4 | Ship Speed relative to reference layer, east vector | kn |
| 5 | Ship Speed relative to reference layer, north vector | kn |
| 6 | Ship heading | degrees |

Sound Velocity Probe (svp1)

00+348:01:59:52.128 1539.40

| Field | Data | Units |
|-------|------|-------|
|-------|------|-------|

| Field | Data | Units |
|-------|-----------------------------------|-------|
| 1 | RVDAS Time tag | |
| 2 | Sound velocity in ADCP sonar well | m/s |

Ocean

pCO2-merged

00+346:23:58:20.672 2000346.9991 2398.4 1008.4 0.01 45.4 350.3 342.6 15.77 Equil
-43.6826 173.1997 15.51 33.90 0.33 5.28 9.05 1007.57 40.0 14.87 182.44

| Field | Data | Units |
|-------|--|----------------------|
| 1 | RVDAS time tag | |
| 2 | PCO ₂ time tag (decimal is time of day) | yyyddd.ttt |
| 3 | Raw voltage | mV |
| 4 | Barometer | mB |
| 5 | Cell temperature | °C |
| 6 | Flow rate | cm ³ /min |
| 7 | Concentration | ppm |
| 8 | PCO ₂ pressure | microAtm |
| 9 | Equilibrated temperature | °C |
| 10 | Flow Source (Equil = pCO ₂ measurement) | |
| 11 | RVDAS latitude | degrees |
| 12 | RVDAS longitude | degrees |
| 13 | TSG external temperature | °C |
| 14 | TSG salinity | PSU |
| 15 | TSG fluorometry | V |
| 16 | RVDAS true wind speed | m/s |
| 17 | RVDAS true wind direction | degrees |
| 18 | Barometric Pressure | mBars |
| 19 | Uncontaminated seawater pump flow rate | l/min |
| 20 | Speed over ground | knots |
| 21 | Course made good | degrees |

tsgfl

00+075:00:00:04.467 -01.488 -01.720 02.6783 33.63748 1.002442 0.002442

| Field | Data | Units |
|-------|----------------------------|----------|
| 1 | RVDAS time tag | |
| 2 | Internal water temperature | °C |
| 3 | Sea Surface Temperature | °C |
| 4 | Conductivity | □Siemens |
| 5 | Salinity | PSU |
| 6 | Fluorometry | V |
| 7 | Unused | |

Calculations

The file *inst.cof* located in the /directory contains the calibration factors for shipboard instruments. This was the file used by the RVDAS processing software.

TSG

Raw TSG data is stored as a 20 byte (character) long hex string

| Bytes | Data |
|-------|-------------------------|
| 1-4 | Sensor Temperature |
| 5-8 | Conductivity |
| 9-14 | Remote Temperature |
| 15-17 | Fluorometer voltage |
| 18-20 | Transmissometer voltage |

The coefficients for temperature and conductivity sensors can be found the rvdascal.txt file and on the calibrations sheets in the appendix.

Calculating Temperature – ITS-90

```
T = decimal equivalent of bytes 1-4
Temperature Frequency: f = T/19 + 2100
Temperature = 1/{g + h[ln(f0/f)] + i[ln2(f0/f)] + j[ln3(f0/f)]} - 273.15
(°C)
```

Calculating Conductivity – ITS-90

```
C = decimal equivalent of bytes 5-8
Conductivity Frequency f = sqrt(C*2100+6250000)
Conductivity = (g + hf2 + if3 + jf4)/[10(1 + [t] + [p])] (siemens/meter)
t = temperature (°C); p = pressure (decibars); [t] = Ctcor; [p] = Cpcor
```

Calculating Fluorometry Voltage

```
f = decimal equivalent of bytes 15-17
Fluorometry Voltage = f/819
```

Calculating Transmittance

```
Vdark = 0.058 V
Vref = 4.765 V
t = decimal equivalent of bytes 18 - 20
Transmissometer Voltage (Vsignal) = t/819
% Transmittance = (Vsignal - Vdark) / (Vref - Vdark)
```

PAR

```
raw data = mV
calibration scale = 6.08 V/([Einstiens/cm2sec)
offset (Vdark) = 0.3 mV
(raw mV - Vdark)/scale x 104 cm2/m2 x 10-3 V/mV = [Einstiens/m2sec
or
(data mV - 0.3 mV) x 1.65 ([Einstiens/m2sec)/mV = [Einstiens/m2sec
```

PIR

```
raw data = mV
calibration scale = 4.13 x 10-6 V/(W/m2)
data mV / (scale x 103 mV/V) = W/m2
```

or

$$\text{data mV} \times 242.1 \text{ (W/m}^2\text{) / mV} = \text{W/m}^2$$

PSP

raw data = mV

calibration scale = $8.28 \times 10^{-6} \text{ V / (W/m}^2\text{)}$

$$\text{data mV} / (\text{scale} \times 10^3 \text{ mV/V}) = \text{W/m}^2$$

or

$$\text{data mV} \times 120.7 \text{ (W/m}^2\text{) / V} = \text{W/m}^2$$

Acquisition Problems and Events

This section lists problems with acquisition noted during this cruise including instrument failures, data acquisition system failures and any other factor affecting this data set. The format is yy+ddd:hh:mm (yy is 2-digit year, ddd is year-day, hh is hour, and mm is minute). Times are reported in GMT.

| Start | End | Description |
|------------------|--------------|---|
| 03+003:23:00(lt) | | Start data collection. |
| 03+006:01:34 | | Magnetometer in water |
| | 03+007:03:30 | Magnetometer is pulled from water (spikes in data) |
| 03+007:01:45 | | Magnetometer in water |
| | 03+007:03:39 | Magnetometer is pulled from water (Ice) |
| 03+007:23:34 | 03+007:23:41 | Multi Beam system was rebooted |
| 03+009:00:30 | | Magnetometer in water |
| | 03+009:03:45 | Magnetometer is pulled from water |
| 03+009:04:30 | | Magnetometer in water |
| | 03+010:12:45 | Magnetometer is pulled from water (Ice) |
| 03+010:23:45 | 03+011:05:15 | Multi Beam readings effected (ice) |
| 03+011:13:30 | | Magnetometer in water |
| 03+011:21:45 | 03+012:00:00 | Magnetometer wasn't sending correct data (Magnetometer Was rebooted to fix issue) |
| 03+014:20:33 | | Magnetometer is pulled from water |
| | 03+015:02:50 | Magnetometer in water 1000ft port side |
| 03+016:15:00 | | Magnetometer raised to 400ft |
| 03+017:05:17 | 03+017:05:17 | Magnetometer shut down and then restarted |
| | 03+017:06:11 | Magnetometer is pulled from water (Ice) |
| 03+017:02:40 | | Magnetometer in water |
| | 03+018:12:15 | Magnetometer is pulled from water |
| 03+018:18:36 | | Magnetometer in water |
| 03+018:19:11 | | Magnetometer monitor turns red |
| | 03+018:19:15 | Magnetometer back to normal |
| 03+019:12:30 | | Bathy hasn't been printing for 8 hours |
| 03+019:14:30 | | Seas 4-6ft swells for last 36 hours |
| 03+020:01:08 | | Turn to port 180 SimRad down |
| | 03+020:01:21 | Turn completed SimRad back to normal |
| 03+020:04:30 | 03+020:04:45 | Multi Beam Had troubles through turn |
| | 03+020:05:15 | Magnetometer is pulled from water |
| 03+020:15:10 | | Magnetometer in water @ 400ft but data is inconsistent |

| | | |
|--------------|--------------|--|
| | 03+020:21:15 | Magnetometer pulled onboard to trouble shoot |
| 03+021:01:55 | | Magnetometer in water port side 900ft |
| | 03+021:16:41 | Magnetometer is pulled from water (Ice) |
| | 03+022:02:45 | Bathy 2000 bad data |
| 03+022:11:15 | | Bathy 2000 going through ice = 445 |
| 03+022:11:45 | | Bathy 2000 going through ice = 460 |
| 03+022:12:45 | | Bathy 2000 going through ice = 444 |
| 03+022:13:00 | | Bathy 2000 going through ice = 451 |
| 03+022:17:02 | | Multi Beam turned off |
| 03+023:17:45 | | Bathy 2000 going through ice = 476 |
| 03+024:16:00 | 03+024:16:10 | Gravity brought down to replace cable |
| 03+024:19:00 | 03+024:19:10 | Simrad reboot |
| 03+025:08:30 | | Magnetometer is water port side 400ft |
| | 03+025:11:15 | Magnetometer is pulled in from water (deploy mcs streamer) |
| 03+025:12:15 | | Magnetometer is back in water port side 400ft |
| 03+026:02:15 | 03+026:02:30 | Bathy Malfunction |
| | 03+026:23:45 | Magnetometer is pulled from water |
| | | |
| | | |
| | | |
| | | |
| | 03+030:12:00 | End log |
| | | |
| | | |
| | | |

Appendix: Sensors and Calibrations

NBP 0301 Sensors:

Shipboard Sensors

| Sensor | Description | Serial # | Last Calibration Date | Status |
|--------------------------------------|---|-------------------------------|-----------------------|----------|
| Meteorology & Radiometers | | | | |
| Port Anemometer | RM Young 5106 | WM46834 | 03/15/02 | Collect |
| Stbd Anemometer | RM Young 5106 | WM46263 | 03/15/02 | Collect |
| Barometer | RM Young 61201 | 01705 | 06/01/01 | Collect |
| Air Temp/Rel. Hum. | RM Young 41372LC | 06134 | 06/01/01 | |
| Mast PRR | BSI PRR-610 | | | Not used |
| UW PRR | BSI PRR-600 | | | Not used |
| PIR (Pyrgometer) | Eppley PIR | 32845F3 | 06/11/02 | Collect |
| PSP (Pyranometer) | Eppley PSP | 33090F3 | 12/06/01 | Collect |
| Mast PAR | BSI QSR-240 | 6356 | 02/15/01 | Collect |
| GUV | | | | Not used |
| PUV | | | | Not used |
| Underway | | | | |
| TSG | SeaBird SBE21 | 0857 | 07/12/02 | Collect |
| TSG Remote Temp | SeaBird 3-01/S | 034071 | 04/16/02 | Collect |
| Fluorometer | Turner 10-AU-005 Lamp: daylight 10-045; ref. filter: 10-052, em. filter: 10-051, ex. filter: 10-050 | 5651 FRTD | N/A | Collect |
| Transmissometer | WET Labs C-Star | CST-422PR | 12/20/01 | Collect |
| Magnetometer | EG&G G-866 | | | Not used |
| Gravimeter | LaCoste & Romberg Gravity Meter | | | Collect |
| Bathymetry | Simrad EK500 | 3001 | 11/1/95 | Collect |
| Bathymetry | Knudsen 320B/R | | | Collect |
| Bathymetry | Bathy 2000 | | | Collect |
| Other | | | | |
| P-Code GPS | Trimble 20636-00 (SM) | 0220035116 | Key expires 07/10/02 | Collect |
| Attitude GPS | Ashtech 12 | 700273F2114 FW 7B13-D1-C21 | N/A | Collect |

NBP 0301 CTD Sensors:

| Sensor | Description | Serial # | Last Calibration Date | Status |
|-------------------------------|---|----------|-----------------------|---------|
| CTD Fish | SeaBird model SBE 9+ | N/A | | Collect |
| CTD Fish Pressure | Paroscientific model 410K-105 pressure sensor | N/A | | Collect |
| CTD Deck Unit | SeaBird model SBE 11+ | N/A | | Collect |
| Primary Temperature Sensor | SeaBird model 3-02/F | N/A | | Collect |
| Secondary Temperature Sensor | SeaBird model 3-02/F | N/A | | Collect |
| Primary Conductivity Sensor | SeaBird model 4-02/0 | N/A | | Collect |
| Secondary Conductivity Sensor | SeaBird model 4C | N/A | | Collect |
| Dissolved Oxygen Sensor | SeaBird model 13-02-B | N/A | | Collect |
| PAR Sensor | Biospherical Instruments QSR-240 | N/A | | Collect |
| PAR Sensor | Biospherical Instruments QSR-240 | N/A | | Collect |
| Transmissometer | WET Labs CST-423PR, C-Star | N/A | | Collect |

Calibrations

The following pages are replicas of current calibration sheets for the sensors used during this cruise.

Gravity Tie

Gravity Tie Spreadsheet

The fields outlined in **BOLD** MUST BE FILLED IN for this spreadsheet to operate properly.
The automatically calculated values show up in the shaded fields.

Date: **11/9/02**
 Location: **Port Hueneme, California**
 Station: Ventura County Airport
 Latitude: 034 12 N
 Longitude: 119 12 W
 Elevation: 13.1m
 Gravity: 979608.813

Reference Code Numbers:

Station no. 5617-1

ISGN no. 12049J

| | Value | Time (GMT) |
|---|--------|------------|
| Ship's meter before gravity tie (Digital Gravity) | 7244.6 | 21:45 |
| Ship's meter after gravity tie (Digital Gravity) | 7246.8 | 0:31 |
| Average | 7245.7 | |
| Ship Gravimeter's Calibration Constant | 1.0046 | |
| Corrected ship's meter (Digital Gravity) | 7279.0 | |

| | Value | Time (GMT) |
|---|--------|------------|
| Ship's meter before gravity tie (serial, RVDAS) | 7278.6 | 21:46 |
| Ship's meter after gravity tie (serial, RVDAS) | 7281.0 | 0:32 |
| Average (for comparison check only) | 7279.8 | |

Portable Gravimeter Correction Divisor 1.007937

| Station | Value | Time (GMT) | Temp | Date | |
|-----------------------|---------|------------|------|---------------|--------------------|
| Pier measurement 1 | 3223.70 | 23:02 | 54 | Nov. 09, 2002 | OBS mgal, averaged |
| Pier measurement 2 | 3223.69 | 23:05 | 53 | Nov. 09, 2002 | 3198.30 |
| Pier measurement 3 | 3223.66 | 23:07 | 53 | Nov. 09, 2002 | |
| Average | 3223.68 | | | | |
| Station measurement 1 | 3207.03 | 23:06 | 53 | Nov. 09, 2002 | OBS mgal, averaged |
| Station measurement 2 | 3207.01 | 23:45 | 54 | Nov. 09, 2002 | 3181.77 |
| Station measurement 3 | 3207.04 | 23:51 | 54 | Nov. 09, 2002 | |
| Average | 3207.03 | | | | |
| Pier measurement 4 | 3223.87 | 0:22 | 54 | Nov. 10, 2002 | OBS mgal, averaged |
| Pier measurement 5 | 3223.90 | 0:23 | 54 | Nov. 10, 2002 | 3198.50 |
| Pier measurement 6 | 3223.90 | 0:25 | 54 | Nov. 10, 2002 | |
| Average | 3223.89 | | | | |

Gravity offset from last tie 972348.79
 Drift since last tie -2.23


| OBS Differences | | Comments |
|--|-----------|---|
| Station to Pier (1, 2, & 3 averaged) | 16.53 | Gravity Tie done by Floyd Trujillo and Sheldon Blackman |
| Station to Pier (4, 5, & 6 averaged) | 16.73 | |
| Averaged Differences | 16.63 | |
| Gravity at pier | 979625.44 | |
| Elevation of pier above gravimeter, meters | 0.5 | |
| Earth differential gravity, mgal/meter | 0.3 | |
| Gravity at ship's gravimeter | 979625.59 | |
| Gravity Offset | 972346.56 | |

Meteorology System

Anemometer (Port)

R. M. YOUNG COMPANY WIND SENSOR CALIBRATION CERTIFICATE

SENSOR: 05106 WIND MONITOR-MA
SENSOR SERIAL NUMBER: WM45834
BEARINGS: SEALED/WATERPROOF GREASE
DATE: APR 6 2001
WIND SPEED THRESHOLD TEST: PASS
LOW WIND SPEED AMPLITUDE/FREQUENCY TEST: PASS
HIGH WIND SPEED AMPLITUDE/FREQUENCY TEST: PASS
VANE TORQUE TEST: PASS
SPECIAL NOTES:
SPECIAL NOTES:

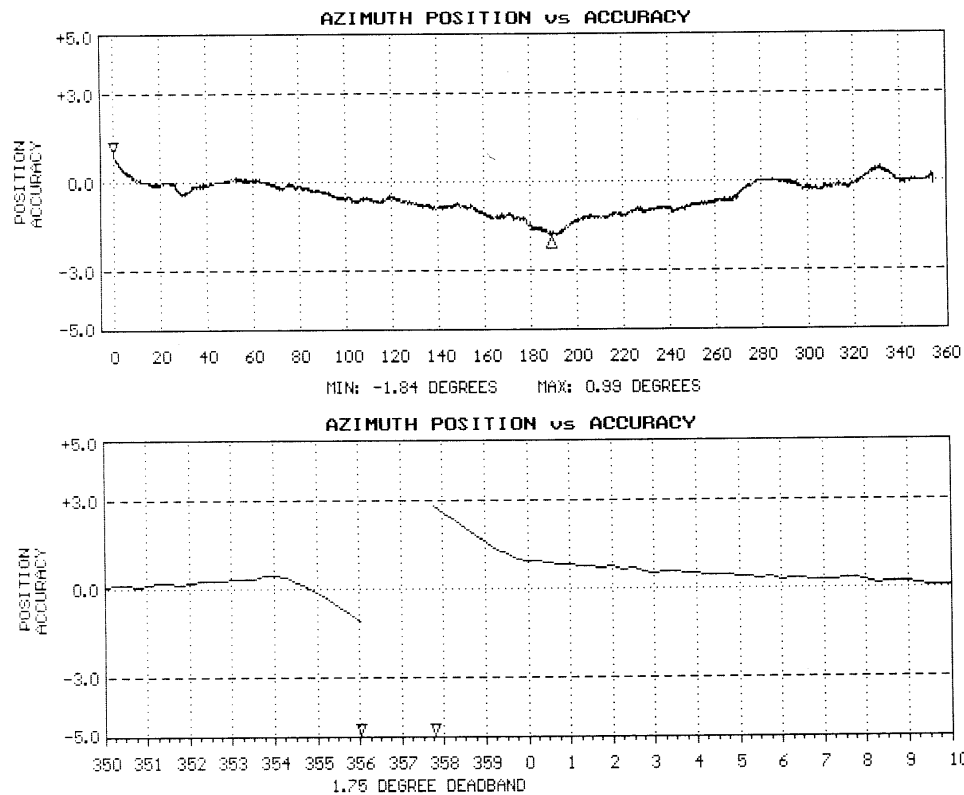


NOTE: Azimuth Position vs Accuracy graphs are accurate to within 0.5 degrees. The accuracy shown in the potentiometer deadband region between 355 and 0 degrees is the result of no resistance change while position changes. The gap represents the actual deadband (open circuit).

Anemometer (Starboard)

R. M. YOUNG COMPANY WIND SENSOR CALIBRATION CERTIFICATE

SENSOR: 05106 WIND MONITOR-MA
 SENSOR SERIAL NUMBER: WM46263
 BEARINGS: SEALED/WATERPROOF GREASE
 DATE: APR 11 2001
 WIND SPEED THRESHOLD TEST: PASS
 LOW WIND SPEED AMPLITUDE/FREQUENCY TEST: PASS
 HIGH WIND SPEED AMPLITUDE/FREQUENCY TEST: PASS
 VANE TORQUE TEST: PASS
 SPECIAL NOTES:
 SPECIAL NOTES:

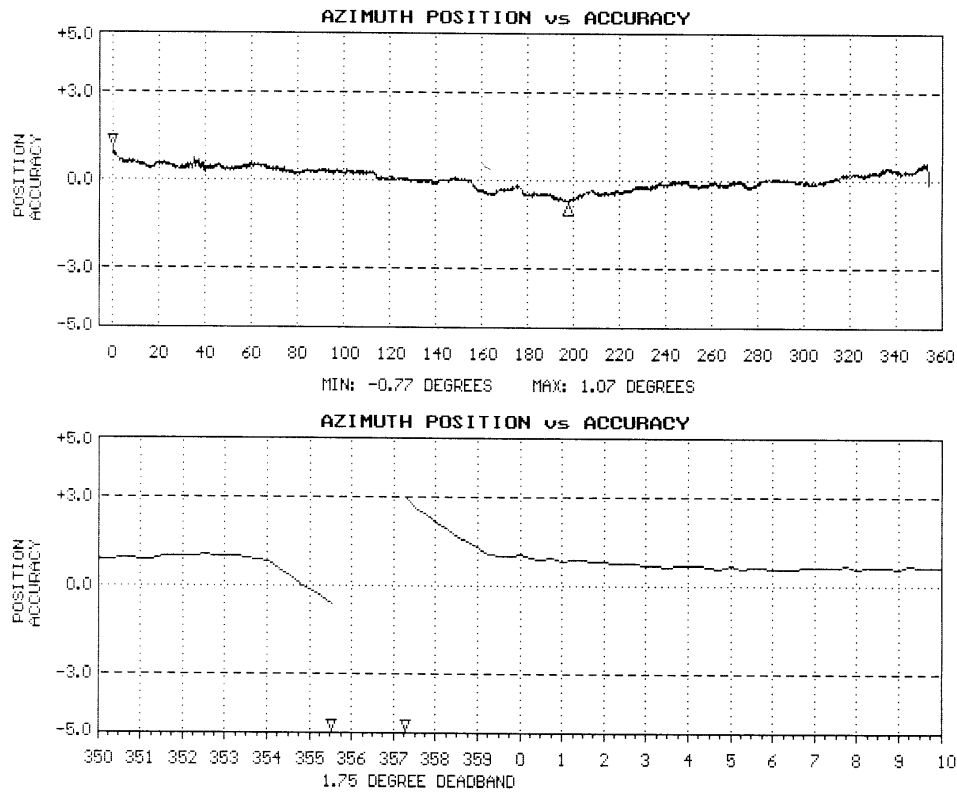

NOTE: Azimuth Position vs Accuracy graphs are accurate to within 0.5 degrees. The accuracy shown in the potentiometer deadband region between 355 and 0 degrees is the result of no resistance change while position changes. The gap represents the actual deadband (open circuit).

PIR (Mast)**THE EPPLEY LABORATORY, INC.**

12 Sheffield Ave., P.O. Box 419, Newport, RI 02840 USA

Telephone: 401-847-1020

Fax: 401-847-1031

Email: eplab@mail.bbsnet.com

Internet: www.eppleylab.com

Scientific Instruments
for Precision Measurements
Since 1917**STANDARDIZATION OF
EPPLEY PRECISION INFRARED RADIOMETER
Model PIR**

Serial Number: 32845F3

Resistance: 739 Ω at 23 $^{\circ}\text{C}$ Temperature Compensation Range: -20 to 40 $^{\circ}\text{C}$

This pyrgeometer has been compared with Precision Infrared Radiometer, Serial Number 29326F3 in Eppley's Blackbody Calibration System under radiation intensities of approximately 200 watts meter⁻² and an average ambient temperature of 23 $^{\circ}\text{C}$.

As a result of a series of comparisons, it has been found to have a sensitivity of:

$$4.13 \times 10^{-6} \text{ volts/watts meter}^{-2}$$

The calculation of this constant is based on the fact that the relationship between radiation intensity and emf is rectilinear, to intensities of 700 watts meter⁻². This radiometer is linear to within $\pm 1.0\%$ up to this intensity.

The calibration of this instrument is traceable to the International Practical Temperature Scale (IPTS) through a precision low-temperature blackbody.

Shipped to:
National Science Foundation
Port Hueneme, CA

Date of Test: June 11, 2002

In Charge of Test: *RT Goman*

S.O. Number: 59011
Date: June 19, 2002

Reviewed by: *Thomas D. Kulk*

Remarks:

PSP (Mast)**THE EPPLEY LABORATORY, INC.**

12 Sheffield Ave., P.O. Box 419, Newport, RI 02840 USA

Telephone: 401-847-1020

Fax: 401-847-1031

Email: eplab@mail.bbsnet.com

Internet: www.eppleylab.com

Scientific Instruments
for Precision Measurements
Since 1917

**STANDARDIZATION
OF
EPPLEY PRECISION SPECTRAL PYRANOMETER
Model PSP**

Serial Number: 33090F3

Resistance: 699 Ω at 23 $^{\circ}\text{C}$
Temperature Compensation Range: -20 to 40 $^{\circ}\text{C}$

This radiometer has been compared with Standard Precision Spectral Pyranometer, Serial Number 21231F3 in Eppley's Integrating Hemisphere under radiation intensities of approximately 700 watts meter⁻² (roughly one-half a solar constant). The adopted calibration temperature is 25 $^{\circ}\text{C}$.

As a result of a series of comparisons, it has been found to have a sensitivity of:

$$8.19 \times 10^{-6} \text{ volts/watts meter}^{-2}$$

The calculation of this constant is based on the fact that the relationship between radiation intensity and emf is rectilinear to intensities of 1400 watts meter⁻². This radiometer is linear to within $\pm 0.5\%$ up to this intensity.

The calibration of this instrument is traceable to standard self-calibrating cavity pyrheliometers in terms of the Systems Internationale des Unites (SI units), which participated in the Ninth International Pyrheliometric Comparisons (IPC IX) at Davos, Switzerland in September-October 2000.

Useful conversion facts: 1 cal cm⁻² min⁻¹ = 697.3 watts meter⁻²
1 BTU/ft²-hr⁻¹ = 3.153 watts meter⁻²

Shipped to:
National Scientific Foundation
Port Hueneme, CA

Date of Test: December 6, 2001

In Charge of Test: *R.T. Egan*

S.O. Number: 58775
Date: December 13, 2001

Reviewed by: *Thomas D. Kuhn*

Remarks:

GUV (Mast)

Calibration Certificate



Biospherical Instruments Inc.

Calibration Certificate for GUV & PUV Radiometers

Serial Number: 9286

Instrument Model: PUV-511

Date Solar Data Processed: 12/14/01

Solar Calibration Dates: 11/9/01 to 11/03/01

Solar Reference GUV(s): 9259

Lamp Calibration Date: 10/18/01

Solar Ref Cal Factor Version: 1

Owner of Instrument: RAYTHEON

Solar Calibration at: San Diego, CA (BSI)

Data Analyst(s): J&R

General Comments: Original Calibration

A note to the end-user. Instrument calibration is easily as important as instrument deployment, but it is often overlooked. This document has been prepared to help explain the conditions under which the different sensors in your instrument have been calibrated. Please read this information carefully and completely. If you do not understand a calibration factor, please feel free to contact the factory for a more detailed explanation.

GUV and GTR radiometers are precision, temperature-controlled filter radiometers designed for long term monitoring. PUV-510 Reference Ultraviolet Radiometers are designed to provide the above-water counterpart to the PUV-500 providing fast and accurate measurements of solar UV in the water column. Both of these series of instruments are calibrated in two different ways: "lamp calibrations" and "solar calibrations." The more familiar lamp calibration is performed in our laboratory using a NIST-traceable 1000 Watt FEL-type Standard of Spectral Irradiance and the methods described in National Bureau of Standards (US) publications 594-13 and 250-20. This standardized procedure gives good accuracy when calibrating the PAR visible channel and is useful in indicating if channel sensitivities have changed over time. Lamp calibrations are problematic for solar UV measurements because the solar spectrum is radically different from the lamp spectrum and changes greatly as a function of wavelength. Solar calibrations are achieved through direct comparison with "reference" GUVs (RGUVs) using the sun as the source of irradiance. These RGUVs are, in turn, calibrated through continuous intercomparison with a high resolution scanning spectroradiometer in San Diego (SUV-100) that is part of a world-wide UV monitoring network.

As a result of our calibration research, we have now standardized on solar calibrations for the UV channels while retaining the traditional lamp-based calibration for PAR. It is important to note that the solar calibration procedure automatically takes into account the spectral bandwidth of the detectors and therefore report the irradiance as a 1nm wide triangular bandpass centered on the nominal wavelength.

Caveats. The reference instruments used at Biospherical are "GUV" model radiometers that are temperature controlled and equipped with cosine collectors optimized for use in air. Years of GUV solar calibration experience have shown the procedure to be robust, accurate and reproducible for generalized GUV calibrations. PUVs are not temperature stabilized, a factor adding uncertainty to GUV/PUV calibration transfers. We are recommending that researchers use the solar calibration constants. Generally, these effects are well below the 10% uncertainty level. For a more detailed discussion, see Booth et al. (1994) Errors in reporting of solar irradiance using moderate bandwidth radiometers: an experimental investigation. SPIE Vol. 2258 Ocean Optics XII: 654-663.

Note: These calibration documents also apply to the "GTR" variant of the GUV instruments.

UV Irradiance Channels Calibrated Using Solar Intercomparison

| ROM Tag Number | Chl | Nominal Wavelength (nm) | Initial Offset (Volts) | Scale Factor in Air | Resulting Units |
|----------------|-----|-------------------------|------------------------|---------------------|---|
| N/A | 2 | 305 | -0.00922 | 0.51767 | $\mu\text{W}/(\text{cm}^2 \cdot \text{nm})$ |
| N/A | 4 | 320 | 0.00618 | -0.10711 | $\mu\text{W}/(\text{cm}^2 \cdot \text{nm})$ |
| N/A | 5 | 340 | -0.0001 | -0.11218 | $\mu\text{W}/(\text{cm}^2 \cdot \text{nm})$ |
| N/A | 8 | 380 | -0.0022 | -0.04364 | $\mu\text{W}/(\text{cm}^2 \cdot \text{nm})$ |

Note: Units for the Scale Factors are Volts/(\(\mu\text{W}/(\text{cm}^2 \cdot \text{nm})\)). The initial offsets shown above resulted from our rooftop intercomparisons and they should be redetermined after the instrument is in its final installation, since the offset at 305nm is known to shift somewhat during shipping.

12/15/2001

9286solarcal12-01.xls

PAGE

BIOSPHERICAL

6196861887

3/27/2002 08:04

GUV (Mast)

| Standard Lamp Calibrated Channels (PAR) | | | | Serial Number: 9296 | | | |
|--|-----|----------------------------|------------------------|--|--|--|--|
| ROM Tag Number | Chs | Nominal Wavelength (nm) | Initial Offset (Volts) | Scale Factor in Air | Resulting Units $\mu E/(cm^2 \cdot sec)$ | | |
| N/A | 8 | PAR | 0.0002 | -6.503 | | | |
| Lamp Reference 91773 (04/12/01) | | | | Units for the Scale Factors are Volts ($\mu E/(cm^2 \cdot sec)$) | | | |
| <p>Photoynthetically Active (or Available) Radiation (PAR). In our instruments, PAR is measured over the spectral region from 400 to 700 nm using sensors with a constant quantum response (responds equally to all wavelengths). Instruments are available from Biospherical with one of two different irradiance measurement geometries. The PAR channel in the PUV measures (plane) downwelling irradiance, "Ed (PAR)", which is the downward irradiance incident on a flat surface of unit area. The measurement in a PUV-500 is made with a "cosine" collector optimized for use underwater. The GUV and PUV-510 also uses cosine collectors, but optimized for use in air. For this reason, direct comparisons of PUV-500 with PUV-510 or GUV-511 instruments are difficult.</p> <p>Ed(PAR) is often confused with scalar irradiance, E_0(PAR), which is a measure of the radiance flux integrated from all directions incident on a point in space, as used by the PNF-300 Natural Fluorometer. Downwelling PAR irradiance will always be less than the scalar PAR under natural aquatic conditions.</p> <p>Please note that the PUV is calibrated in $\mu E/(cm^2 \cdot sec)$. This is different from the PNF (cm^2, not m^2).</p> <p>This channel is calibrated by a standard lamp.</p> | | | | | | | |
| Instrument Diagnostic Channels | | | | | | | |
| ROM Tag Number | Chs | Variable | Offset | Scale Factor | Original Value Resulting Units | | |
| N/A | 7 | Diode Array Gnd. | 0 | 1 | 0.000038 Volts | | |
| <p>Note: These channels are not normally used in data analysis, but are available for monitoring instrument performance, and for monitoring long term changes in the electronics. The offsets in these channels are normally entered with Offset as 0 and Scale as 1. Ground channels track the potential at several locations in the instrument, and the reference voltage is used to monitor the performance of the analog to digital converter. The voltages shown are not calibration factors, but they are the values at the time of this calibration and are included for reference.</p> | | | | | | | |
| Temperature | | | | | | | |
| ROM Tag Number | Chs | Function | Offset | Scale Factor | Resulting Units | | |
| N/A | 1 | Detector Array Temperature | 0 | 0.01 | $^{\circ}C$ | | |
| N/A | 3 | Electronics Temperature | 0 | 0.01 | $^{\circ}C$ | | |
| <p>Note: "Detector Array Temperature" records the temperature of the detector/array array. It is possible to use data from this to compensate for the residual temperature sensitivity in the PUV, but this compensation is not supported in our software.</p> | | | | | | | |

PAR (mast)**Biospherical Instruments Inc.**

CALIBRATION CERTIFICATE

Calibration Date 2/15/01
 Model Number QSR-240
 Serial Number 6356
 Operator TPC
 Standard Lamp 94532(03/13/98)
 Probe Excitation Voltage Range: 5 to 18 VDC(+)
 Output Polarity: POSITIVE

Probe Conditions at Calibration(in air): ✓

Calibration Voltage: 6 VDC(+)
 Probe Current: 1.1 mA

Probe Output Voltage:

Probe Illuminated 86.6 mV
 Probe Dark 0.3 mV ✓
 Probe Net Response 86.3 mV

Corrected Lamp Output:

Output In Air (same condition as calibration):

8.55E+15 quanta/cm²sec
0.014 uE/cm²sec

Calibration Factor:

(To calculate irradiance, divide the net voltage reading in Volts by this value.)

Dry: 1.01E-17 V/(quanta/cm²sec)
6.08E+00 V/(uE/cm²sec) ✓

Notes:

1. Annual calibration is recommended.
2. Calibration is performed using a Standard of Spectral Irradiance traceable to the National Institute of Standards and Technology (NIST).
3. The collector should be cleaned frequently with alcohol.
4. Calibration was performed with customer cable, when available.

SR240R 05/24/95

TSG Calibration Files

*Underway Conductivity (Wet Lab)***SEA-BIRD ELECTRONICS, INC.**

1808 136th Place N.E., Bellevue, Washington 98005 USA
 Phone: (425) 643 - 9866 Fax: (425) 643 - 9954 Internet: seabird@seabird.com

SENSOR SERIAL NUMBER = 1390
 CALIBRATION DATE: 26-Feb-02

TSG Conductivity
 CONDUCTIVITY CALIBRATION DATA
 PSS 1978: C(35,15,0) = 4.2914 Siemens/meter

GHIJ COEFFICIENTS

g = -3.93721982e+00
 h = 4.71760725e-01
 i = 3.91210505e-04
 j = 2.24390213e-06
 CPcor = -9.57e-08 (nominal)
 CTcor = 3.25e-06 (nominal)

ABCDM COEFFICIENTS

a = 4.34273451e-04
 b = 4.71515703e-01
 c = -3.93435367e+00
 d = -8.27365845e-05
 m = 3.0
 CPcor = -9.57e-08 (nominal)


| BATH TEMP (ITS-90 °C) | BATH SAL (PSU) | BATH COND (Siemens/m) | INST FREQ (kHz) | INST COND (Siemens/m) | RESIDUAL (Siemens/m) |
|--------------------------|-------------------|--------------------------|--------------------|--------------------------|-------------------------|
| 22.0000 | 0.0000 | 0.00000 | 2.88540 | -0.00000 | -0.00000 |
| 0.9999 | 35.0470 | 2.99379 | 8.44293 | 2.99381 | 0.00002 |
| 4.5000 | 35.0467 | 3.30431 | 8.81993 | 3.30431 | -0.00000 |
| 15.0000 | 35.0464 | 4.29683 | 9.92836 | 4.29679 | -0.00004 |
| 18.5000 | 35.0459 | 4.64552 | 10.28917 | 4.64552 | -0.00000 |
| 23.9998 | 35.0448 | 5.20882 | 10.84635 | 5.20884 | 0.00002 |
| 28.9999 | 35.0411 | 5.73496 | 11.34172 | 5.73500 | 0.00004 |
| 32.5001 | 35.0337 | 6.10960 | 11.68138 | 6.10956 | -0.00004 |

Conductivity = $(g + hf^2 + if^3 + jf^4) / [10(1 + \delta t + \epsilon p)]$ Siemens/meter

Conductivity = $(af^m + bf^2 + c + dt) / [10(1 + \epsilon p)]$ Siemens/meter

t = temperature [deg C]; p = pressure [decibars]; δ = CTcor; ϵ = CPcor;

Residual = (instrument conductivity - bath conductivity) using g, h, i, j coefficients

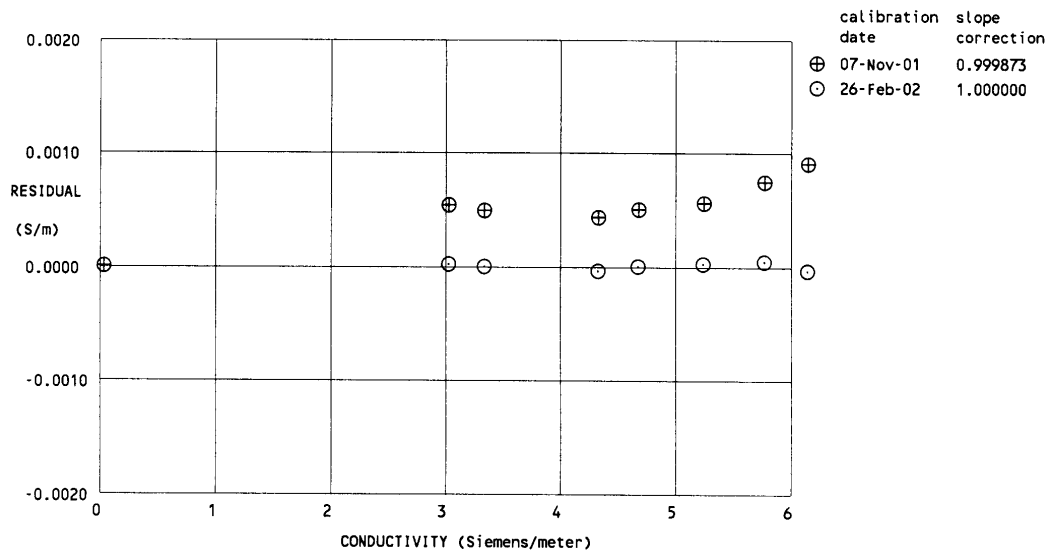

Underway Temperature Sensor (Wet Lab)**SEA-BIRD ELECTRONICS, INC.**

1808 136th Place N.E., Bellevue, Washington 98005 USA
 Phone: (425) 643 - 9866 Fax: (425) 643 - 9954 Internet: seabird@seabird.com

SENSOR SERIAL NUMBER = 1390
 CALIBRATION DATE: 26-Feb-02

TEMPERATURE CALIBRATION DATA
 ITS-90 TEMPERATURE SCALE

ITS-90 COEFFICIENTS

g = 4.21133811e-03
 h = 5.97506417e-04
 i = 6.74711109e-06
 j = -1.26911965e-06
 $f_0 = 1000.000$

TPSG
 IPTS-68 COEFFICIENTS

a = 3.64763440e-03
 b = 5.81273311e-04
 c = 1.04100442e-05
 d = -1.26850783e-06
 $f_0 = 2600.195$


| BATH TEMP (ITS-90 °C) | INSTRUMENT FREQ (Hz) | INST TEMP (ITS-90 °C) | RESIDUAL (ITS-90 °C) |
|--------------------------|-------------------------|--------------------------|-------------------------|
| 0.9999 | 2600.195 | 1.0000 | 0.00014 |
| 4.5000 | 2814.589 | 4.4997 | -0.00027 |
| 15.0000 | 3533.526 | 15.0003 | 0.00027 |
| 18.5000 | 3799.626 | 18.5000 | 0.00001 |
| 23.9998 | 4245.947 | 23.9996 | -0.00023 |
| 28.9999 | 4682.700 | 28.9999 | 0.00002 |
| 32.5001 | 5006.561 | 32.5002 | 0.00005 |

Temperature ITS-90 = $1/\{g + h[\ln(f_0/f)] + i[\ln^2(f_0/f)] + j[\ln^3(f_0/f)]\} - 273.15$ (°C)

Temperature IPTS-68 = $1/\{a + b[\ln(f_0/f)] + c[\ln^2(f_0/f)] + d[\ln^3(f_0/f)]\} - 273.15$ (°C)

Following the recommendation of JPOTS: T_{68} is assumed to be $1.00024 * T_{90}$ (-2 to 35 °C).

Residual = instrument temperature - bath temperature

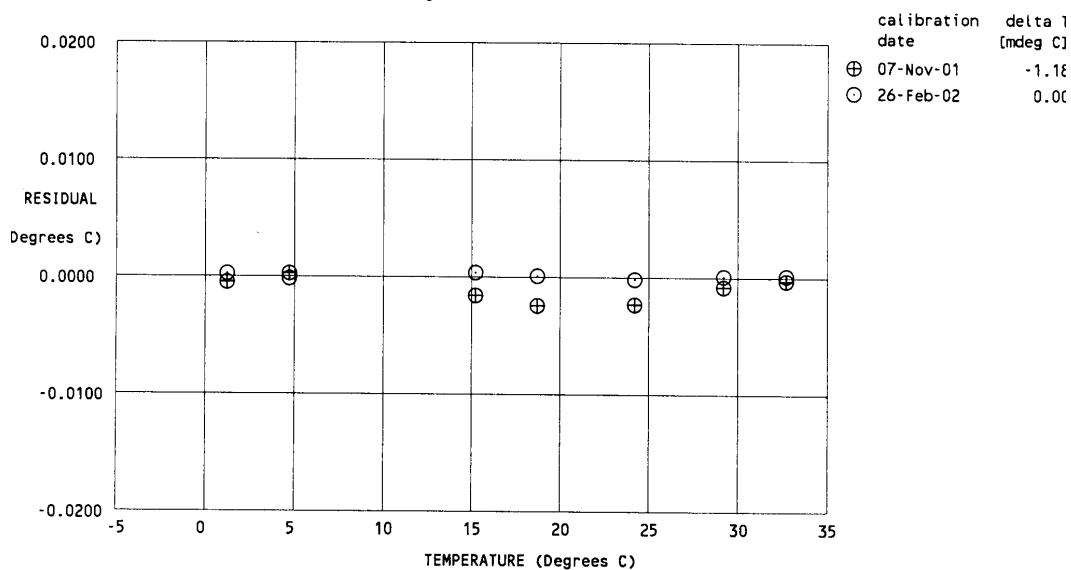

Underway Remote Temperature Sensor (Wet Lab)**SEA-BIRD ELECTRONICS, INC.**

1808 136th Place N.E., Bellevue, Washington 98005 USA
 Phone: (425) 643 - 9866 Fax: (425) 643 - 9954 Internet: seabird@seabird.com

SENSOR SERIAL NUMBER = 4071
 CALIBRATION DATE: 16-Apr-02s

ITS-90 COEFFICIENTS

$g = 4.35876516e-03$
 $h = 6.39863070e-04$
 $i = 2.13393613e-05$
 $j = 1.57577668e-06$
 $f_0 = 1000.000$

BATH TEMP
 (ITS-90 °C)

INSTRUMENT FREQ
 (Hz)

NBP 0204 Remote temp
 SBE 3 TEMPERATURE CALIBRATION DATA
 ITS-90 TEMPERATURE SCALE
TSG in Wet Lab

IPTS-68 COEFFICIENTS

$a = 3.68121033e-03$
 $b = 5.98920278e-04$
 $c = 1.61869089e-05$
 $d = 1.57723580e-06$
 $f_0 = 2991.316$

INST TEMP
 (ITS-90 °C)

RESIDUAL
 (ITS-90 °C)


| | | | |
|---------|----------|---------|----------|
| -1.4998 | 2991.316 | -1.4999 | -0.00005 |
| 1.0002 | 3164.085 | 1.0003 | 0.00007 |
| 4.5002 | 3417.963 | 4.5002 | 0.00005 |
| 8.0002 | 3686.226 | 8.0002 | -0.00005 |
| 11.5002 | 3969.295 | 11.5002 | -0.00004 |
| 15.0002 | 4267.566 | 15.0002 | 0.00001 |
| 18.5002 | 4581.420 | 18.5002 | 0.00001 |
| 22.0003 | 4911.248 | 22.0003 | -0.00002 |
| 25.5002 | 5257.401 | 25.5002 | 0.00003 |
| 29.0002 | 5620.254 | 29.0002 | 0.00003 |
| 32.5002 | 6000.144 | 32.5002 | -0.00003 |

Temperature ITS-90 = $1/\{g + h[\ell n(f_0/f)] + i[\ell n^2(f_0/f)] + j[\ell n^3(f_0/f)]\} - 273.15$ (°C)

Temperature IPTS-68 = $1/\{a + b[\ell n(f_0/f)] + c[\ell n^2(f_0/f)] + d[\ell n^3(f_0/f)]\} - 273.15$ (°C)

Following the recommendation of JPOTS: T_{68} is assumed to be $1.00024 * T_{90}$ (-2 to 35 °C).

Residual = instrument temperature - bath temperature

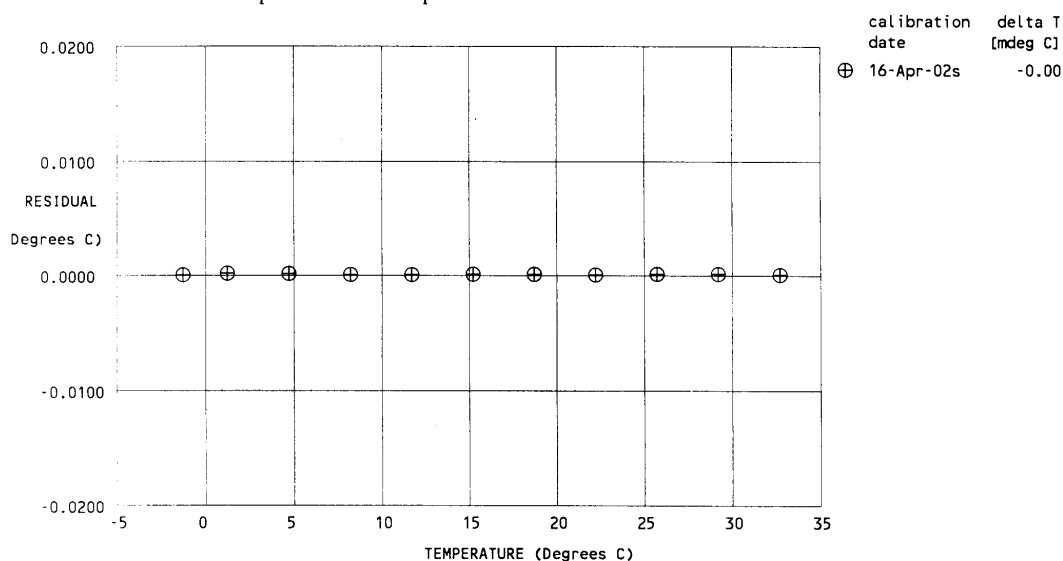

Underway Transmissometer (Wet Lab)

PO Box 518
620 Applegate St.
Philomath OR 97370



(541) 929-5650
Fax (541) 929-5277
<http://www.wetlabs.com>

C-Star Calibration Sheet

Transmissometer / TS

Date: 12/20/01
Customer: National Science Foundation
Serial Number: CST-422PR
Job Number: 0012016
Work Order: 003

$V_d = V_{\text{dark}}$ 0.058
 $V_{\text{air}} = V_{\text{out in air}}$ 4.841
 $V_{\text{ref}} = V_{\text{out in water}}$ 4.733
Calibration Temperature of water 23.0
Ambient Temperature 21.8

$$\% \text{ Transmission} = (V_{\text{sig}} - V_d) / (V_{\text{ref}} - V_d)$$

$$Tr = e^{-cx}$$

To solve for the attenuation coefficient c in units of m^{-1} use the following equation.

$$c = -1/x (\ln(V_{\text{sig}} - V_d) / (V_{\text{ref}} - V_d))$$

For further information on these calculations please see C-Star User's Guide, Section 2.

Temperature Error: 0.02% F.S./°C

NOTES

- (V_d)—analog output of the instrument with the beam blocked. This is an instrumental offset.
- (V_{air})—analog output voltage of the instrument with a cleared beam path.
- (V_{ref})—analog output voltage of the instrument with clean H_2O in the path.
- (**Calibration Temperature of water**)—temperature of the clean water used to obtain V_{ref} .
- (**Ambient Temperature**)—temperature of the instrument during the calibration procedures.
- (V_{sig})—measured signal voltage of the C-Star.

Pressure Sensor (CTD)

Pressure Calibration Check

13 July 2001

pressure sensor model: Digiquartz 410K-105
 sensor serial number: 58949
 installed in: CTD 09P10716-0377

This pressure calibration is a check of the 'test' sensor against a stable reference pressure sensor. The reference pressure sensor is itself checked several times per year against a NIST-traceable pressure standard maintained at Paroscientific, Inc.. The circumstances of this pressure check introduce no more than 1.5 psia total error in 10,000 psi (0.015 %) in addition to the error resident in the Paroscientific site standard. The check offers a very high level certification of the health and proper operation of the 'test' sensor.

| Input Pressure* [psia] | Sensor Output [hz] | Sensor Temperature [deg C] | Pressure Factory Coef [psia] | Pressure Corrected [psia] | Error [psia] |
|---------------------------|-----------------------|-------------------------------|---------------------------------|------------------------------|-----------------|
| 14.700 | 33360.59 | 23.2 | 14.668 | 14.986 | 0.286 |
| 2014.689 | 34041.54 | 23.2 | 2014.473 | 2014.776 | 0.087 |
| 4014.348 | 34706.93 | 23.3 | 4014.163 | 4014.452 | 0.104 |
| 6013.814 | 35357.64 | 23.3 | 6013.643 | 6013.918 | 0.104 |
| 8013.175 | 35994.51 | 23.3 | 8013.027 | 8013.288 | 0.113 |
| 10012.889 | 36618.31 | 23.3 | 10012.365 | 10012.612 | -0.277 |
| 8013.257 | 35994.54 | 23.3 | 8013.101 | 8013.362 | 0.105 |
| 6013.753 | 35357.61 | 23.3 | 6013.535 | 6013.811 | 0.058 |
| 4014.262 | 34706.87 | 23.4 | 4013.938 | 4014.227 | -0.035 |
| 2014.600 | 34041.43 | 23.4 | 2014.097 | 2014.400 | -0.200 |
| 14.670 | 33360.38 | 23.4 | 14.007 | 14.325 | -0.345 |

Input pressure is generated with a Ruska model 5201 dead-weight tester, serial number 23330/380, and is determined by measurement with reference pressure sensor model Digiquartz 410K-000, serial number 73292.

Sensor Temperature: pressure sensor internal temperature.

Pressure Corrected: pressure computed with original factory coefficients and then corrected with a slope and offset to give the best linear agreement with the 'reference' Input pressure.

Error: Corrected pressure - Input pressure

A linear fit of this calibration data, between sensor pressure computed with factory coefficients and the Input pressure, yields correction coefficients:

$$\text{Corrected pressure} = \text{psi_slope} * \text{Factory pressure} + \text{psi_offset [psia]}$$

$$\text{psi_slope} = 0.99999 \text{ and } \text{psi_offset} = +0.32 \text{ [psia]}$$

These are converted to Slope and Offset in decibars for use in the SEASOFT programs by: Slope = psi_slope = 0.99999
 Offset = C * (psi_offset - 14.7 * (1 - psi_slope)) = +0.2188 [dbars]
 C = 0.689476 [dbar/psi]

Slope and Offset coefficients are entered into the pressure sensor calibration coefficient section of the <>.CON file using the program SEACON.

Digiquartz Coefficients:

C1 = -4.840395e+04
 C2 = -2.017057e-03
 C3 = 1.464810e-02
 D1 = 3.990600e-02
 D2 = 0.000000e+00
 T1 = 2.998386e+01
 T2 = -2.560542e-04
 T3 = 3.869120e-06
 T4 = 2.452640e-09

AD590 Pressure Temperature Coefficients:

AD590M = 0.01146
 AD590B = -8.45734

Calibration Correction:

Slope = 0.99999
 Offset = +0.2188

Primary Temperature Sensor (CTD)

T1

SEA-BIRD ELECTRONICS, INC.1808 136th Place N.E., Bellevue, Washington 98005 USA
Phone: (425) 643 - 9866 Fax: (425) 643 - 9954 Internet: seabird@seabird.comSENSOR SERIAL NUMBER = 1457
CALIBRATION DATE: 25-Feb-02sTEMPERATURE CALIBRATION DATA
ITS-90 TEMPERATURE SCALE

ITS-90 COEFFICIENTS

g = 4.82804638e-03
h = 6.69948735e-04
i = 2.49743854e-05
j = 1.93704984e-06
f₀ = 1000.000


IPTS-68 COEFFICIENTS

a = 3.68121035e-03
b = 5.98504293e-04
c = 1.44387438e-05
d = 1.93842519e-06
f₀ = 6157.246

| BATH TEMP (ITS-90 °C) | INSTRUMENT FREQ (Hz) | INST TEMP (ITS-90 °C) | RESIDUAL (ITS-90 °C) |
|--------------------------|-------------------------|--------------------------|-------------------------|
| -1.4998 | 6157.246 | -1.4999 | -0.00005 |
| 1.0002 | 6513.066 | 1.0003 | 0.00008 |
| 4.5002 | 7035.721 | 4.5002 | 0.00003 |
| 8.0002 | 7587.721 | 8.0001 | -0.00007 |
| 11.5002 | 8169.871 | 11.5001 | -0.00005 |
| 15.0002 | 8782.920 | 15.0002 | 0.00003 |
| 18.5002 | 9427.577 | 18.5002 | 0.00004 |
| 22.0002 | 10104.554 | 22.0002 | 0.00002 |
| 25.5002 | 10814.532 | 25.5002 | -0.00003 |
| 29.0002 | 11558.185 | 29.0002 | -0.00000 |
| 32.5002 | 12336.121 | 32.5002 | 0.00000 |

Temperature ITS-90 = $1/\{g + h[\ln(f_0/f)] + i[\ln^2(f_0/f)] + j[\ln^3(f_0/f)]\} - 273.15$ (°C)Temperature IPTS-68 = $1/\{a + b[\ln(f_0/f)] + c[\ln^2(f_0/f)] + d[\ln^3(f_0/f)]\} - 273.15$ (°C)Following the recommendation of JPOTS: T₆₈ is assumed to be 1.00024 * T₉₀ (-2 to 35 °C).

Residual = instrument temperature - bath temperature

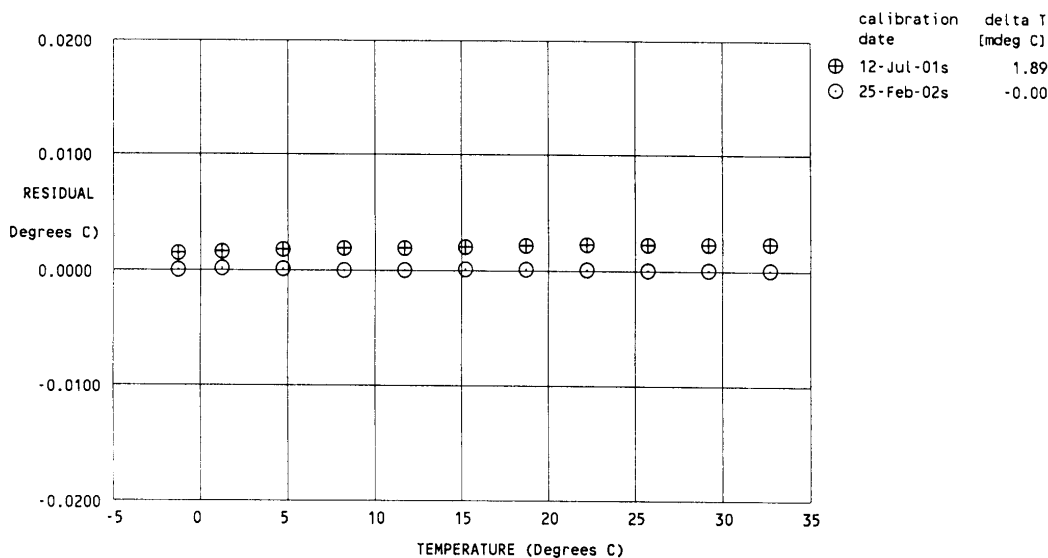

Secondary Temperature Sensor (CTD)

T2

SEA-BIRD ELECTRONICS, INC.1808 136th Place N.E., Bellevue, Washington 98005 USA
Phone: (425) 643 - 9866 Fax: (425) 643 - 9954 Internet: seabird@seabird.comSENSOR SERIAL NUMBER = 1541
CALIBRATION DATE: 12-Jan-02sTEMPERATURE CALIBRATION DATA
ITS-90 TEMPERATURE SCALE

ITS-90 COEFFICIENTS

 $g = 4.82590834e-03$
 $h = 6.66204274e-04$
 $i = 2.42682222e-05$
 $j = 1.85656243e-06$
 $f_0 = 1000.000$


IPTS-68 COEFFICIENTS

 $a = 3.67963857e-03$
 $b = 5.96320570e-04$
 $c = 1.41302217e-05$
 $d = 1.85789931e-06$
 $f_0 = 6202.742$

| BATH TEMP (ITS-90 °C) | INSTRUMENT FREQ (Hz) | INST TEMP (ITS-90 °C) | RESIDUAL (ITS-90 °C) |
|--------------------------|-------------------------|--------------------------|-------------------------|
| -1.3839 | 6202.742 | -1.3838 | 0.00004 |
| 1.1262 | 6563.677 | 1.1262 | -0.00000 |
| 4.6228 | 7091.330 | 4.6227 | -0.00010 |
| 8.2233 | 7665.717 | 8.2232 | -0.00011 |
| 11.6609 | 8244.339 | 11.6610 | 0.00010 |
| 15.2211 | 8875.467 | 15.2214 | 0.00034 |
| 18.7299 | 9529.818 | 18.7297 | -0.00023 |
| 22.2339 | 10216.313 | 22.2337 | -0.00011 |
| 25.7992 | 10949.316 | 25.7992 | 0.00001 |
| 29.2206 | 11686.074 | 29.2207 | 0.00005 |
| 32.7605 | 12483.354 | 32.7605 | 0.00000 |

Temperature ITS-90 = $1/\{g + h[\ln(f_0/f)] + i[\ln^2(f_0/f)] + j[\ln^3(f_0/f)]\} - 273.15$ (°C)Temperature IPTS-68 = $1/\{a + b[\ln(f_0/f)] + c[\ln^2(f_0/f)] + d[\ln^3(f_0/f)]\} - 273.15$ (°C)Following the recommendation of JPOTS: T_{68} is assumed to be $1.00024 * T_{90}$ (-2 to 35 °C).

Residual = instrument temperature - bath temperature

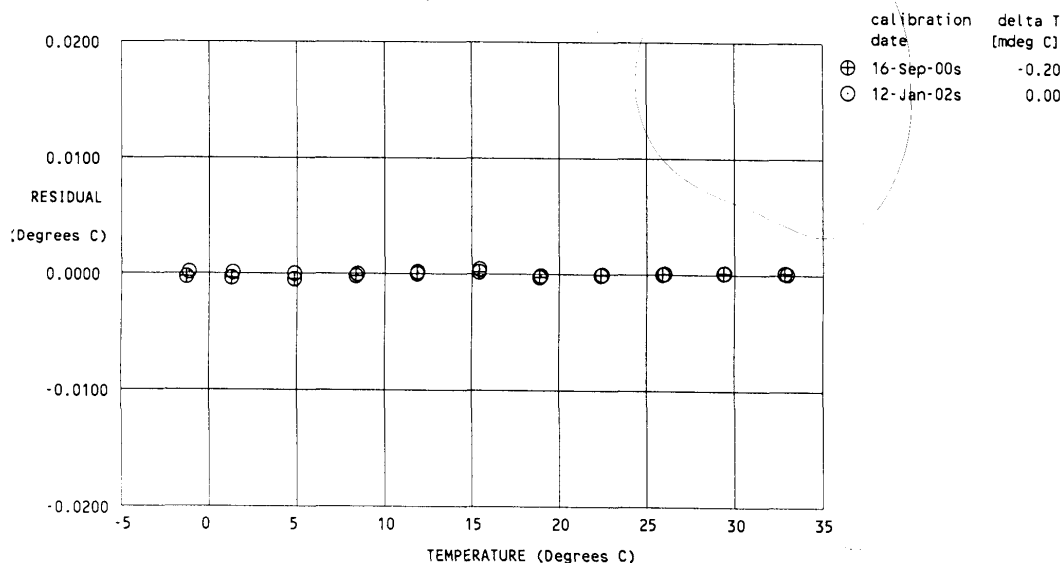

Dissolved Oxygen Sensor (1) (CTD)

D001

SEA-BIRD ELECTRONICS, INC.

1808 136th Place N.E., Bellevue, Washington 98005 USA
 Phone: (425) 643 - 9866 Fax: (425) 643 - 9954 Internet: seabird@seabird.com

SENSOR SERIAL NUMBER = 0082
 CALIBRATION DATE: 04-Jan-02w

SBE 43
 OXYGEN CALIBRATION DATA

COEFFICIENTS:

Soc = 0.3710

TCor = 0.0023

Boc = 0.0214

PCor = 1.350e-04

Voffset = -0.6270

| BATH OX ml/l | BATH TEMP (ITS-90 °C) | BATH SAL PSU | INSTRUMENT VOLTS | INST OX ml/l | RESIDUAL ml/l |
|-----------------|--------------------------|-----------------|---------------------|-----------------|------------------|
| 1.24 | 5.00 | 0.04 | 0.967 | 1.31 | 0.07 |
| 1.25 | 25.00 | 0.03 | 1.140 | 1.22 | -0.03 |
| 2.09 | 5.00 | 0.04 | 1.215 | 2.14 | 0.05 |
| 2.11 | 25.00 | 0.03 | 1.517 | 2.08 | -0.03 |
| 2.98 | 25.00 | 0.03 | 1.917 | 2.99 | 0.01 |
| 4.61 | 5.00 | 0.04 | 1.963 | 4.64 | 0.03 |
| 4.71 | 25.00 | 0.03 | 2.670 | 4.69 | -0.02 |
| 6.32 | 25.00 | 0.03 | 3.397 | 6.34 | 0.02 |
| 7.35 | 5.00 | 0.04 | 2.770 | 7.34 | -0.01 |

V = voltage output from SBE-43

T = ocean temperature [°C] from CTD


S = ocean salinity [PSU] from CTD

P = ocean pressure [dbar] from CTD

Oxsat(T, S) = oxygen saturation [ml/l]

$$\text{oxygen (ml/l)} = (\text{Soc} * (\text{V} + \text{Voffset}) + \text{Boc} * \exp(-0.03 * \text{T})) * \exp(\text{TCor} * \text{T}) * \text{Oxsat}(\text{T}, \text{S}) * \exp(\text{PCor} * \text{P})$$

Residual = instrument oxygen - bath oxygen

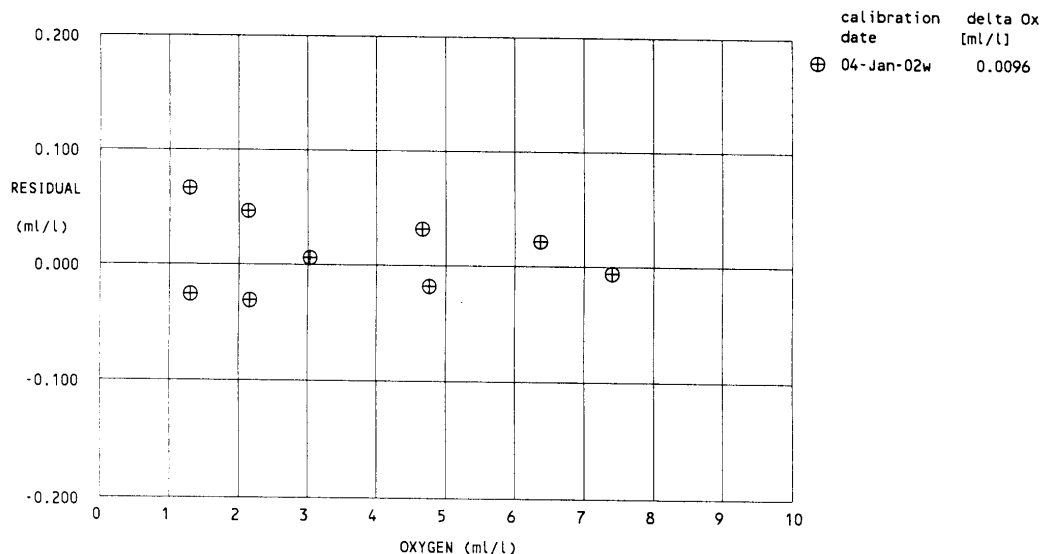

PAR (CTD)**Biospherical Instruments Inc**

CALIBRATION CERTIFICATE

UNDERWATER PAR SENSOR WITH LOG AMPLIFIER

| Calibration Date: 12/12/01 | | | | Job No.: R7902 | | | | | |
|--|-------------------|----------------|----------------------------|---|-------------------------------------|----------------------|---------------|-----------|--|
| Model Number: QSP200L | | | | | | | | | |
| Serial Number: 4361 | | | | | | | | | |
| Operator: TPC | | | | | | | | | |
| Standard Lamp: 94532 (05/19/01) | | | | | | | | | |
| Operating Voltage Range: 6 to 15 VDC (+) | | | | | | | | | |
| Note: The QSP-200L uses a log amplifier to measure the detector signal current with $V = \log I \text{ (Amps)} / I_{\text{Ref}}$ To calculate irradiance, use this formula: | | | | | | | | | |
| Irradiance = Calibration factor * (10⁴Light Signal Voltage - 10⁴Dark Voltage) | | | | | | | | | |
| With the appropriate (solar corrected) Irradiance Calibration Factor: | | | | | | | | | |
| Dry Calibration Factor: 1.80E+12 quanta/cm ² sec/"amps" | | | | 3.00E-06 μ Einsteins/cm ² sec/"amps" | | | | | |
| Wet Calibration Factor: 3.04E+12 quanta/cm ² sec/"amps" | | | | 5.05E-06 μ Einsteins/cm ² sec/"amps" | | | | | |
| Sensor Test Data and Results⁴⁾ | | | | | | | | | |
| Sensor Supply Current (Dark): | | 76.5 | mA | | | | | | |
| Supply Voltage: | | 6 | Volts | | | | | | |
| Imp Integrated PAR Irradiance: | | 8.58E+15 | quanta/cm ² sec | 0.01424 | μ Einsteins/cm ² sec | | | | |
| SC3 Immersion Coefficient: | | 0.594 | Scalar Correction: | 1 | PAR Solar Correction: 1.0000 | | | | |
| Nominal Filter OD | Calibrated Trans. | Sensor Voltage | Measured Trans. | Measured Signal (Amps) | Estimated Signal (Amps) | Calc. Output (Volts) | Error (Volts) | Error (%) | Test Irrad. (quanta/cm ² sec) |
| No Filter | 100.00% | 3.677 | 100.00% | 4.75E-07 | 4.75E-07 | 3.677 | 0.000 | 0.0 | 8.58E+15 |
| 0.3 | 36.10% | 3.231 | 35.79% | 1.70E-07 | 1.72E-07 | 3.235 | 0.004 | 0.9 | 3.07E+15 |
| 0.5 | 27.60% | 3.120 | 27.71% | 1.32E-07 | 1.31E-07 | 3.118 | -0.002 | -0.4 | 2.38E+15 |
| 1 | 9.27% | 2.660 | 9.59% | 4.56E-08 | 4.41E-08 | 2.646 | -0.014 | -3.3 | 8.22E+14 |
| 2 | 1.11% | 1.759 | 1.18% | 5.59E-09 | 5.28E-09 | 1.735 | -0.024 | -5.7 | 1.01E+14 |
| 3 | 0.05% | 0.730 | 0.08% | 3.86E-10 | 2.54E-10 | 0.607 | -0.123 | -34.3 | 6.97E+12 |
| Dark Before: 0.178 Volts | | | | | | | | | |
| Light - No Filter Hldr.: 3.678 Volts | | | | | | | | | |
| Dark After - NFH: 0.178 Volts | | | | | | | | | |
| Average Dark 0.1781 Volts | | | | | | | | | |
| | | | | $I_{\text{Ref}} = 1.00\text{E-}10 \text{ Amps}$ $I_{\text{Dark}} = 1.51\text{E-}10 \text{ Amps}$ $10^{V_{\text{Dark}}} = 1.506954 \text{ Amps}$ | | | | | |
| Notes: 1. Annual calibration is recommended. 2. There is increasing error associated with readings below zero. 3. The collector should be cleaned frequently with alcohol. 4) This section is for internal use and for more advanced analysis. | | | | | | | | | |

Cal Constant = $10^5 / \text{Biospherical wet Cal Factor}$
 = 1.9801×10^{10}

QSP-200L.xls

Transmissometer (CTD)

4

25 cm TRANSMISSOMETER OPERATING INSTRUCTIONS**OPERATION & CALIBRATION:**

First, connect a power source (9 to 30 VDC) to the instrument as shown on the connector wiring diagram, see figure 1. Observe polarity when connecting the power supply to the transmissometer, connect positive to pin 4 and negative to pin 1.

Use a voltmeter to measure the output voltage, pin 2 is the output and pin 3 is ground.

Block the light path to measure the zero output, it should be 0.00, +/- .01 VDC.

Clean the windows using kimwipes (or other non abrasive material), with a solution of dish washing liquid and water. When the windows are clean, the output voltage in air should be within +/- .02 VDC of the AIR CALIBRATION value listed below.

Perform the above procedure before each calibration and use of the instrument to measure transmission of water. The wavelength of the source is 660 nm, and at this wavelength the maximum value for light transmission in clean water with a 25 cm path length is 91.3% (4.565 VDC). Pure water absorption is 8.7% for a 25 cm path length at 660 nm.

MOUNTING INSTRUCTIONS:

A mounting bracket is provided with the transmissometer to simplify mounting the instrument on your system, see figure 2.

PRECAUTIONS:

DO NOT OPEN THE INSTRUMENT--this voids the warranty. If the instrument does not function properly, please consult the factory.

DO NOT LEAVE THE INSTRUMENT ON WHEN NOT IN USE. The LED is quite stable, but it will decrease in intensity, like most light sources, if left on for a long period of time.

DATA REDUCTION:

Air calibration may change with time. The LED light output can decrease approximately 1% in 1000 hours of operation. If the air calibration is measured frequently and the following correction is applied, then this change can be compensated for and will not affect the accuracy of the data.

$$V = (A/B) \cdot (X-Z) \quad \text{and} \quad \% \text{ Transmission} = 20 \cdot V$$

V=Corrected output voltage, (≤ 4.565 VDC since 91.3% is pure water).

A=Air calibration value listed below.

B=Air calibration (present value).

X=Data value (output voltage measured in water).

Z=Zero offset with light path blocked.

The AIR CALIBRATION for SN- 207D was 4.650 VDC on 6/21/2001.

The ZERO OFFSET with the light path blocked is -0.001 VDC

11/12/01 Air Calibration 4.528 VDC

11/12/01 Zero Offset 0.020 VDC

$$\frac{4.565}{4.255} = 21.8$$

$$\frac{4.565 - 0.001}{4.1 - 4.1} = 0.0219$$

$$B = -0.001$$

~~DO NOT OPEN THE INSTRUMENT~~

11/12/01 Air Cal Voltage = 4.254
11/12/01 Zero Offset = 0.001

4.64 m

0.000 m 7/0

NBP01 - C

Primary Conductivity Sensor (CTD)

C1

SEA-BIRD ELECTRONICS, INC.1808 136th Place N.E., Bellevue, Washington 98005 USA
Phone: (425) 643 - 9866 Fax: (425) 643 - 9954 Internet: seabird@seabird.comSENSOR SERIAL NUMBER = 1431
CALIBRATION DATE: 26-Feb-02sCONDUCTIVITY CALIBRATION DATA
PSS 1978: C(35,15,0) = 4.2914 Siemens/meter

GHIJ COEFFICIENTS

g = -4.25126837e+00
h = 5.52009987e-01
i = -2.59621095e-04
j = 4.23501439e-05
CPcor = -9.57e-08 (nominal)
CTcor = 3.25e-06 (nominal)


ABCDM COEFFICIENTS

a = 7.34008230e-06
b = 5.51292431e-01
c = -4.24966663e+00
d = -9.34327006e-05
m = 4.5
CPcor = -9.57e-08 (nominal)

| BATH TEMP (ITS-90 °C) | BATH SAL (PSU) | BATH COND (Siemens/m) | INST FREQ (kHz) | INST COND (Siemens/m) | RESIDUAL (Siemens/m) |
|--------------------------|-------------------|--------------------------|--------------------|--------------------------|-------------------------|
| 0.0000 | 0.0000 | 0.00000 | 2.77614 | 0.00000 | 0.00000 |
| -1.4000 | 36.7466 | 2.90961 | 7.76857 | 2.90956 | -0.00005 |
| 1.0464 | 36.7467 | 3.12889 | 8.01933 | 3.12894 | 0.00005 |
| 15.0000 | 36.7472 | 4.48251 | 9.41799 | 4.48254 | 0.00003 |
| 18.5000 | 36.7471 | 4.84587 | 9.75876 | 4.84584 | -0.00003 |
| 29.0000 | 36.7438 | 5.98122 | 10.75286 | 5.98120 | -0.00002 |
| 32.5000 | 36.7364 | 6.37159 | 11.07358 | 6.37161 | 0.00002 |

Conductivity = $(g + hf^2 + if^3 + jf^4) / [10(1 + \delta t + \epsilon p)]$ Siemens/meterConductivity = $(af^m + bf^2 + c + dt) / [10(1 + \epsilon p)]$ Siemens/meter t = temperature [deg C]; p = pressure [decibars]; δ = CTcor; ϵ = CPcor;

Residual = (instrument conductivity - bath conductivity) using g, h, i, j coefficients

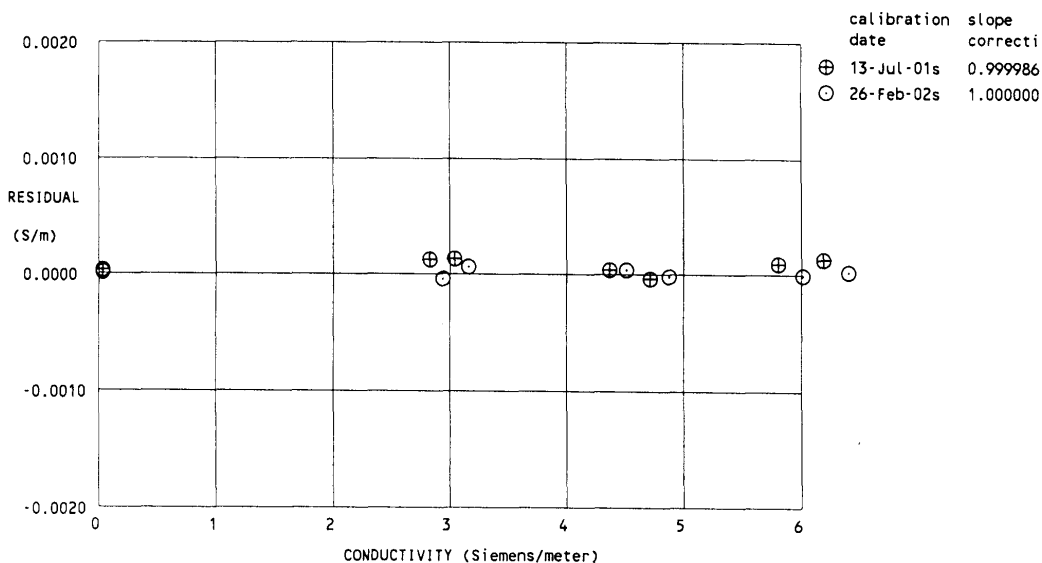

Secondary Conductivity Sensor (CTD)

C2

SEA-BIRD ELECTRONICS, INC.1808 136th Place N.E., Bellevue, Washington 98005 USA
Phone: (425) 643 - 9866 Fax: (425) 643 - 9954 Internet: seabird@seabird.comSENSOR SERIAL NUMBER = 2069
CALIBRATION DATE: 26-Feb-02sCONDUCTIVITY CALIBRATION DATA
PSS 1978: C(35,15,0) = 4.2914 Siemens/meter

GHIJ COEFFICIENTS

g = -1.03852400e+01
h = 1.45055564e+00
i = -4.37394148e-03
j = 3.87871790e-04
CPcor = -9.57e-08 (nominal)
CTcor = 3.25e-06 (nominal)


ABCDM COEFFICIENTS

a = 2.84539481e-09
b = 1.43679554e+00
c = -1.03489252e+01
d = -4.62728567e-05
m = 8.7
CPcor = -9.57e-08 (nominal)

| BATH TEMP (ITS-90 °C) | BATH SAL (PSU) | BATH COND (Siemens/m) | INST FREQ (kHz) | INST COND (Siemens/m) | RESIDUAL (Siemens/m) |
|--------------------------|-------------------|--------------------------|--------------------|--------------------------|-------------------------|
| 0.0000 | 0.0000 | 0.00000 | 2.68401 | 0.00000 | 0.00000 |
| -1.4000 | 36.7466 | 2.90961 | 5.23926 | 2.90956 | -0.00005 |
| 1.0464 | 36.7467 | 3.12889 | 5.38293 | 3.12893 | 0.00004 |
| 15.0000 | 36.7472 | 4.48251 | 6.19568 | 4.48256 | 0.00005 |
| 18.5000 | 36.7471 | 4.84587 | 6.39608 | 4.84585 | -0.00002 |
| 29.0000 | 36.7438 | 5.98122 | 6.98485 | 5.98116 | -0.00006 |
| 32.5000 | 36.7364 | 6.37159 | 7.17599 | 6.37163 | 0.00004 |

Conductivity = $(g + hf^2 + if^3 + jf^4) / [10(1 + \delta t + \epsilon p)]$ Siemens/meterConductivity = $(af^m + bf^2 + c + dt) / [10(1 + \epsilon p)]$ Siemens/metert = temperature [deg C]; p = pressure [decibars]; δ = CTcor; ϵ = CPcor;

Residual = (instrument conductivity - bath conductivity) using g, h, i, j coefficients

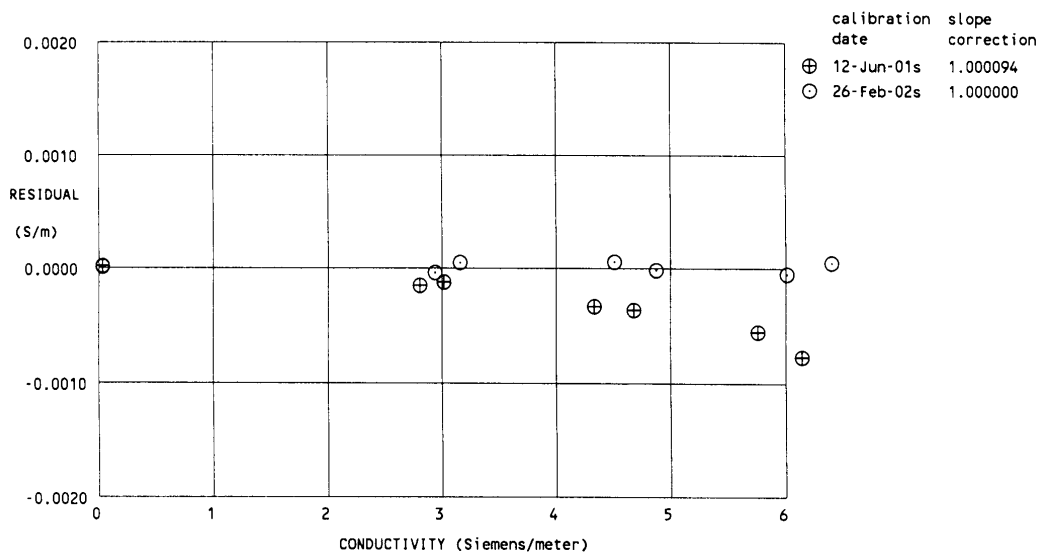

Fluorimeter (CTD)Fluorimeter calibration readings

2/1/02

Ambient temperature 20°C


Output for detector mechanically blanked 0.0273 Volts

Output for pure water 0.1136 Volts

| chlorophyll concentration in acetone ($\mu\text{g/l}$) | Output (volts) |
|--|----------------|
| Acetone (pure) | 0.1179 |
| 0.1 | 0.9900 |
| 0.3 | 1.3403 |
| 1.0 | 1.8602 |
| 2.99 | 2.3500 |
| 9.9 | 2.8689 |
| 29.1 | 3.3242 |
| 90.9 | 3.7978 |

The uncertainty of the chlorophyll concentration is estimated not to exceed 3%. The uncertainty of output voltage measurement is estimated not to exceed 2mV.

Signed

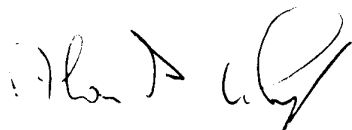

Date

1st Feb 2002

Serial number 088080

Page 2 of 2

