


Data Report NBP1310A

October 26, 2013 – November 13, 2013

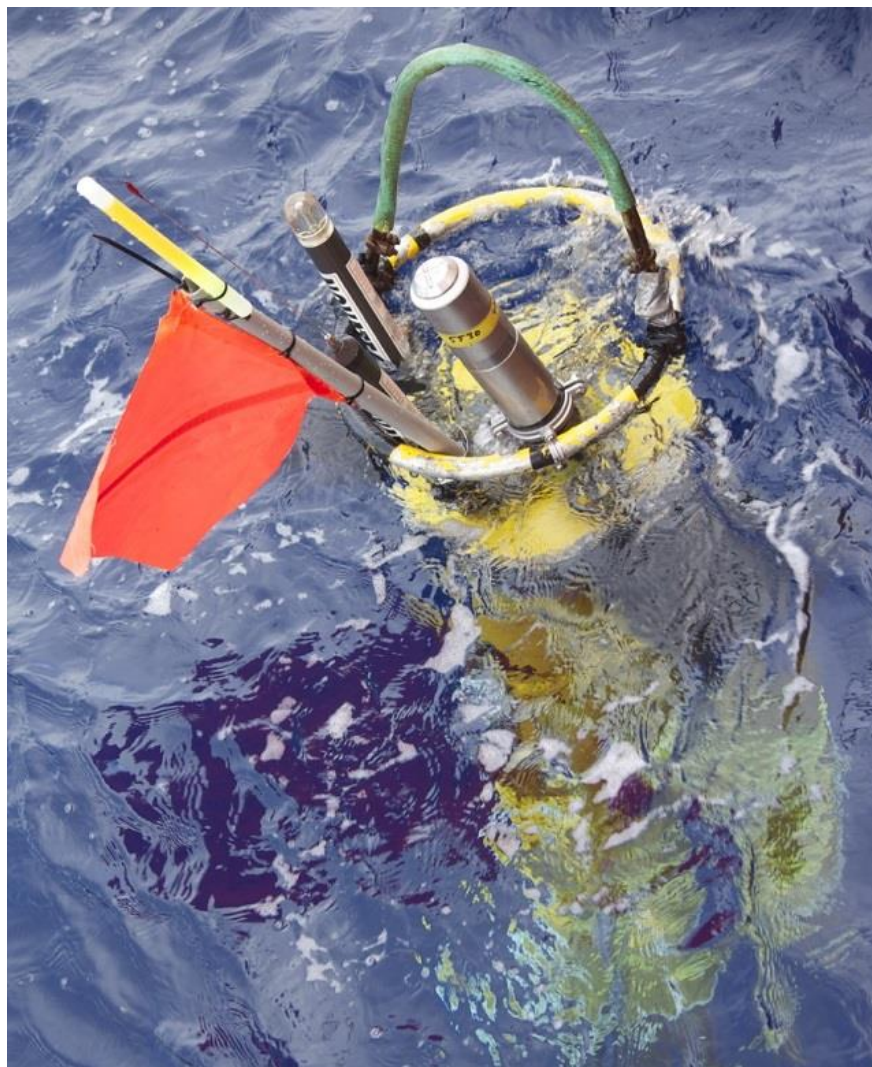

RVIB Nathaniel B. Palmer
United States Antarctic Program
Antarctic Support Contractor
Prepared by Kathleen Gavahan and Sean Drabant

Table of Contents

INTRODUCTION	3
DISTRIBUTION CONTENTS AT A GLANCE	4
EXTRACTING DATA	5
DISTRIBUTION CONTENTS	6
CRUISE INFORMATION	6
<i>Cruise Track</i>	6
<i>Satellite Images</i>	6
NBP DATA PRODUCTS	6
<i>MGD77</i>	8
SCIENCE OF OPPORTUNITY	9
<i>ADCP</i>	9
<i>pCO₂</i>	9
CRUISE SCIENCE	10
<i>XBT</i>	10
RVDAS	10
<i>Sensors and Instruments</i>	10
Underway Sensors	11
Meteorology and Radiometry	11
Geophysics	11
Oceanography	11
Navigational Instruments	12
<i>Data</i>	<i>Error! Bookmark not defined.</i>
Underway Data /rvdas/uw	13
Sound Velocity Probe (svp1)	13
Meteorology (mwx1)	13
MET string	13
PUS string	14
SUS string	14
Knudsen (knud)	14
Fluorometer (flr1)	14
pCO ₂ (pco2)	15
Micro-TSG (tsg1)	15
Micro-TSG #2 (tsg2)	15
Gravimeter (grv1)	16
Engineering (eng1)	17
Hydro-DAS (hdas)	18
GUV Data (pguv)	18
Remote Temperature (rtmp)	18
Oxygen Data (oxygen)	19
Winch Data (bwnc, twnc, cwnc)	19
Navigational Data /rvdas/nav	20
Seapath GPS (seap)	20
Trimble (P-Code) GPS (PCOD)	22
Gyro Compass (gyr1)	23
ADCP Course (adcp)	23
Processed Data /process/	24
pCO ₂ -merged	24
Calculations	25
PAR	25
PSP	25
PIR	26
ACQUISITION PROBLEMS AND EVENTS	27
APPENDIX: SENSORS AND CALIBRATIONS	28

Introduction

The NBP data acquisition systems continuously log data from the instruments used during the cruise. This document describes:

- The structure and organization of the data on the distribution media
- The format and contents of the data strings
- Formulas for calculating values
- Information about the specific instruments in use during the cruise
- A log of acquisition problems and events during the cruise that may affect the data
- Scanned calibration sheets for the instruments in use during the cruise.

The data is distributed on a DVD-R written in UDF format. It is readable by most modern computer platforms.

All the data has been compressed using Unix “gzip,” identified by the “.tz” extension. It has been copied to the distribution media in the Unix tar archive format, “.tar” extension. Tools are available on all platforms for uncompressing and de-archiving these formats: On Macintosh, one can use Stuffit Expander with DropStuff. On Windows operating systems, one can use WinZip.

MultiBeam and raw ADCP data are distributed separately.

IMPORTANT: Read the last section, “Acquisition Problems and Events,” for important information that may affect the processing of this data.

Distribution Contents at a Glance

Volume 1 of 1: NBP1310A

File

Description

/

NBP1310A.trk
 NBP1310A.mgd
 NBP1310A.gmt
 INSTCOEF.TXT
 1310ADATA.doc
 1310ADATA.pdf

Root level directory

Text file of cruise track (lat,lon)
 Full Cruise MGD77 data file
 GMT binary file of MGD77 data
 Instrument Coefficient File
 Data Report NBP1310A (MS Word)
 Data Report NBP1310A (PDF format)

/cal-sheets

NBP1310A-Sensors.doc
 NBP1310A-CalSheets.zip

Calibration Sheets

Sensor Calibration Sheet Reference
 Sensor Calibration Sheet files

/plots

NBP1310A-track.jpg
 NBP1310A-track.png

Cruise track plots

Cruise track plot (JPEG format)
 Cruise track plot (PNG format)

/process

1310AJGOF.tz
 1310AQC.tz
 1310APCO2.tz
 1310AMGD.tz
 1310APROC.tz

Processed data

JGOFs format data files
 Daily RVDAS QC postscript plots
 Merged pCO₂ data files
 MGD Data
 Other processed data

/rvdas/nav

1310Aadcp.tz
 1310Agyr1.tz
 1310APCOD.tz
 1310Aseap.tz

Navigation data

ADCP Data Sets
 Gyro raw data
 Trimble P-code raw data
 Seapath data

/rvdas/uw

310Abwnc.tz
 310Actdd.tz
 310Aeng1.tz
 310Ahdas.tz
 310Aknud.tz
 310Ambdp.tz
 310Amwx1.tz
 310Aoxyg.tz
 310Apc02.tz
 310Apguv.tz
 310Artmp.tz
 310Atsg1.tz
 310Atsg2.tz

Underway data

Baltic winch data
 CTD depth data
 Engineering data
 HydroDAS raw data
 Knudsen raw data
 Multibeam depth data
 Meteorology raw data
 Oxygen sensor
 pCO₂ raw data
 GUV raw data
 Sound velocity probe (in ADCP well)
 Micro TSG data
 2nd Micro TSG data

/Imagery

1310AImagery.tz

Satellite Imagery

Collection of Imagery Files

/ocean

1310Actd.tz

Ocean data

CTD Data

/MultiBeam

[dates]

Raw multibeam data

Extracting Data

The Unix tar command has many options. It is often useful to know exactly how an archive was produced when expanding its contents. All archives are gzipped tar files and were created using the command,

```
tar -czvf archive_filename files_to_archive
```

To create a list of the files in the archive, use the Unix command,

```
tar -tvf archive_filename > contents.list
```

where `contents.list` is the name of the file to create

To extract the files from the archive:

```
tar -xvf archive_filename file(s)_to_extract
```

G-zipped files will have a “.tz” extension on the filename. “.tz” stands for tared and gzipped. These files can be decompressed after de-archiving, using the Unix command,

```
gunzip filename.tz
```

Distribution Contents

Cruise Information

NBP1310A departed Punta Arenas on October 23, 2013

Data logging was started at on October 28, 2013 07:00 UTC

Data logging was stopped at on November 12, 2013 02:50 UTC

Cruise Track

The distribution DVD includes a GMT cruise track file (NBP1310A.trk). It contains the longitude and latitude of the ship's position at one-minute intervals extracted from the NBP1310A.gmt file.

PNG and PDF cruise track files have been produced and placed in the /plots directory.

Satellite Images

Satellite Images received for this cruise can be found in the file called /Imagery/1310AImagery.tar. Each type of image is contained in a .tz file within that file.

NBP Data Products

The IT staff on the NBP creates two processed data products for every cruise: JGOFS and MGD77.

The data processing scripts used to produce JGOFS and MGD77 data sets create a lot of intermediate files. These files are included on the data distribution media in a file called /process/1310Aproc.tar. These files are not intended to be end-products. They are included to make re-processing easier in the event of an error, but no extensive detail of the formats is included in this document. If you have any questions, please contact itvessel@usap.gov.

JGOFS

The JGOFS data set can be found on the distribution media in the file /process/1310Ajpgof.tar. The archive contains one file produced for each day named jgDDD.dat.tz, where DDD is the year-day the data was acquired. The “.tz” extension indicates that the individual files are compressed before archiving. Each daily file consists of 22 columnar fields in text format as described in the table below. The JGOFS data set is created from calibrated data decimated at one-minute intervals. Several fields are derived measurements from more than a single raw input. For example, Course Made Good (CMG) and Speed Over Ground (SOG) are calculated from gyro and GPS inputs. Daily plots during the cruise are produced from the JGOFS data set. Note: Null, unused, or unknown fields are indicated as “NAN” 9999 in the JGOFS data.

Field	Data	Units
01	UTC date	dd/mm/yy
02	UTC time	hh:mm:ss
03	SEAPATH latitude (negative is South)	tt.tttt
04	SEAPATH longitude (negative is West)	ggg.gggg
05	Speed over ground	Knots
06	GPS HDOP	-
07	Gyro Heading	Degrees (azimuth)
08	Course made good	Degrees (azimuth)
09	Mast PAR	$\mu\text{Einsteins/meter}^2 \text{ sec}$
10	Sea surface temperature (remote)	$^{\circ}\text{C}$
11	Sea surface conductivity (TSG1)	siemens/meter
12	Sea surface salinity (TSG1)	PSU
13	Sea depth (uncorrected, calc. sw sound vel. 1500 m/s)	meters
14	True wind speed (max speed windbird)	meters/sec
15	True wind direction (max speed windbird)	degrees (azimuth)
16	Ambient air temperature	$^{\circ}\text{C}$
17	Relative humidity	%
18	Barometric pressure	mBars
19	Sea surface fluorometry	$\mu\text{g/l (mg/m}^3\text{)}$
20	Transmissometer	%
21	PSP	W/m^2
22	PIR	W/m^2

MGD77

The MGD77 data set is contained in a single file for the entire cruise. It can be found in the top level of the distribution data structure as NBP1310A.mgd. The file NBP1310A.gmt is created from the MGD77 dataset using the “mgd77togmt” utility. NBP1310A.gmt can be used with the GMT plotting package.

The data used to produce the NBP1310A.mgd file can be found on the distribution media in the file /process/1310Aproc.tar. The data files in the archive contain a day's data and follow the naming convention Dddd.fnl.tz, where ddd is the year-day. These files follow a space-delimited columnar format that may be more accessible for some purposes. They contain data at one-second intervals rather than one minute and are individually “gzipped” to save space. Below is a detailed description of the MGD77 data set format. The other files in the archive contain interim processing files and are included to simplify possible reprocessing of the data using the RVDAS NBP processing scripts.

All decimal points are implied. Leading zeros and blanks are equivalent. Unknown or unused fields are filled with 9's. All “corrections”, such as time zone, diurnal magnetics, and EOTVOS, are understood to be added.

Col	Len	Type	Contents	Description, Possible Values, Notes
1	1	Int	Data record type	Set to “5” for data record
2-9	8	Char	Survey identifier	
10-12	3	int	Time zone correction	Corrects time (in characters 13-27) to UTC when added; 0 = UTC
13-16	4	int	Year	4 digit year
17-18	2	int	Month	2 digit month
19-20	2	int	Day	2 digit day
21-22	2	int	Hour	2 digit hour
23-27	5	real	Minutes x 1000	
28-35	8	real	Latitude x 100000	+ = North - = South. (–9000000 to 9000000)
36-44	9	real	Longitude x 100000	+ = East - = West. (–18000000 to 18000000)
45	1	int	Position type code	1=Observed fix 3=Interpolated 9=Unspecified
46-51	6	real	Bathymetry, 2- way travel time	In 10,000th of seconds. Corrected for transducer depth and other such corrections
52-57	6	real	Bathymetry, corrected depth	In tenths of meters.
58-59	2	int	Bathymetric correction code	This code details the procedure used for determining the sound velocity correction to depth
60	1	int	Bathymetric type code	1 = Observed 3 = Interpolated (Header Seq. 12) 9 = Unspecified
61-66	6	real	Magnetics total field, 1 ST sensor	In tenths of nanoteslas (gammas)
67-72	6	real	Magnetics total field, 2 ND sensor	In tenths of nanoteslas (gammas), for trailing sensor
73-78	6	real	Magnetics residual field	In tenths of nanoteslas (gammas). The reference field used is in Header Seq. 13
79	1	int	Sensor for residual field	1 = 1 st or leading sensor 2 = 2 nd or trailing sensor 9 = Unspecified
80-84	5	real	Magnetics diurnal correction	In tenths of nanoteslas (gammas). (In nanoteslas) if 9-filled (i.e., set to “+9999”), total and residual fields are assumed to

Col	Len	Type	Contents	Description, Possible Values, Notes
				be uncorrected; if used, total and residuals are assumed to have been already corrected.
85-90	6	F6.0	Depth or altitude of magnetics sensor	(In meters) + = Below sea level 3 = Above sea level
91-97	7	real	Observed gravity	In 10 th of mgals. Corrected for Eotvos, drift, tares
98-103	6	real	EOTVOS correction	In 10 th of mgals. $E = 7.5 V \cos \phi \sin \alpha + 0.0042 V^*V$
104-108	5	real	Free-air anomaly	In 10 th of mgals G = observed G = theoretical
109-113	5	char	Seismic line number	Cross-reference for seismic data
114-119	6	char	Seismic shot-point number	
120	1	int	Quality code for navigation	5= Suspected, by the originating institution 6= Suspected, by the data center 9= No identifiable problem found

Science of Opportunity

ADCP

The shipboard ADCP system measures currents in a depth range from about 30 to 300 m -- in good weather. In bad weather or in ice, the range is reduced, and sometimes no valid measurements are made. ADCP data collection is the OPP-funded project of Eric Firing (University of Hawaii) and Teri Chereskin (Scripps Institution of Oceanography). Data is collected on both the LMG and the NBP for the benefit of scientists on individual cruises, and for the long-term goal of building a profile of current structure in the Southern Ocean.

A data feed is sent from the ADCP system to RVDAS whenever a reference layer is acquired. This feed contains east and north vectors for ship's speed, relative to the reference layer, and ship's heading. Collected files (one per day) are archived in 1310Aadcp.tar in the directory /rvdas/nav.

pCO₂

The NBP carries a pCO₂ measurement system from Lamont-Doherty Earth Observatory (LDEO). pCO₂ data is recorded by RVDAS and transmitted to LDEO at the end of each cruise. You will find pCO₂ data in a file named 1310Apco2.tar in the /process directory, which contains the pCO₂ instrument's data merged with GPS, meteorological and other oceanographic measurements. For more information contact Colm Sweeney (csweeney@ldeo.columbia.edu).

Cruise Science

XBT

During the cruise, eXpendable BathyThermographs were used to obtain water column temperature profiles, providing corrections to the sound velocity profile for the multibeam system. The data files from these launches are included as 1310Axbt.tar in the /ocean directory. No XBTs were collected on this cruise.

RVDAS

The Research Vessel Data Acquisition System (RVDAS) was developed at Lamont-Doherty Earth Observatory of Columbia University and has been in use on its research ship for many years. It has been extensively adapted for use on the USAP research vessels.

Daily data processing of the RVDAS data is performed to calibrate and convert values into useable units and as a quality-control on operation of the DAS. Raw and processed data sets from RVDAS are included in the data distribution. The tables below provide detailed information on the sensors and data. Be sure to read the “Significant Acquisition Events” section for important information about data acquisition during this cruise.

Sensors and Instruments

RVDAS data is divided into two general categories, *underway and navigation*. They can be found on the distribution media as subdirectories under the top level rvdas directory: /rvdas/uw, and /rvdas/nav. Processed oceanographic data is in the top level directory, /process. Each instrument or sensor produces a data file named with its channel ID. Each data file is g-zipped to save space on the distribution media. Not all data types are collected every day or on every cruise.

The naming convention for data files produced by the sensors and instruments is

NBP[CruiseID][ChannelID].dDDD

Example: NBP1310Amwx1.d025

- The CruiseID is the numeric name of the cruise, in this case, NBP1310A.
- The ChannelID is a 4-character code representing the system being logged. An example is “mwx1,” the designation for meteorology.
- DDD is the day of year the data was collected

Underway Sensors

Meteorology and Radiometry

Measurement	Channel ID	Collect. Status	Rate	Instrument
Air Temperature	mwx1	continuous	1 sec	R.M. Young 41372LC
Relative Humidity	mwx1	continuous	1 sec	R.M. Young 41372LC
Wind Speed/Direction	mwx1	continuous	1 sec	Gill 1390-PK-062/R
Barometer	mwx1	continuous	1 sec	R.M. Young 61201
PIR (LW radiation)	mwx1	continuous	1 sec	Eppley PIR
PSP (SW radiation)	mwx1	continuous	1 sec	Eppley PSP
PAR	mwx1	continuous	1 sec	BSI QSR-240
GUV	pguv	continuous	2 sec	BSI PUV-2511
PUV	pguv	not collected		BSI PUG-2500

Geophysics

Measurement	Channel ID	Collect. Status	Rate	Instrument
Gravimeter	grv1	continuous	10 sec*	LaCoste & Romberg
Magnetometer	mag1	not collected	15 sec	EG&G G-866
Bathymetry	knud	continuous	Varies	Knudsen 320B/R

*Data is output every second but it only changes every 10 seconds.

Oceanography

Measurement	Channel ID	Collect. Status	Rate	Instrument
Conductivity	mtsg	Continuous	6 sec	SeaBird SBE-45
Salinity	mtsg	Continuous	6 sec	Calc. from pri. temp
Sea Surface Temp	mtsg	Continuous	6 sec	SeaBird SBE 38
Fluorometry	hdas	Continuous	2 sec	WET Lab AFL
Transmissometry	hdas	Continuous	2 sec	WET Lab C-Star
pCO ₂	pco2	Continuous	70 sec	(LDEO)
ADCP	adcp	Continuous	varies	RD Instruments
Oxygen	oxyg	Continuous	10 sec	Oxygen Optode 3835

Navigational Instruments

Measurement	Channel ID	Collect. Status	Rate	Instrument
Trimble GPS	PCOD	Continuous	1 sec	Trimble 20636-00SM
Gyro	gyr1	Continuous	0.2 sec	Yokogawa Gyro
SeaPath	seap	Continuous	1 sec	SeaPath 200

Data

Data is received from the RVDAS system via RS-232 serial connections. A time tag is added at the beginning of each line of data in the form,

```
yy+dd:hh:mm:ss.sss [data stream from instrument]
```

where

```
yy      = two-digit year
ddd     = day of year
hh      = 2 digit hour of the day
mm      = 2 digit minute
ss.sss  = seconds
```

All times are reported in UTC.

The delimiters that separate fields in the raw data files are often spaces and commas but can be other characters such as : = @. Occasionally no delimiter is present. Care should be taken when reprocessing the data that the field's separations are clearly understood.

In the sections below a sample data string is shown, followed by a table that lists the data contained in the string.

Underway Data /rvdas/uw

Each section below describes a type of data file (file name extension in parentheses) followed by a typical line of data in the file. In the table(s) for each section is a description of the fields within each line of data.

Note: most data files listed below will be included with each cruise's data distribution; however some types of files may be omitted if the instrument was not operating during the cruise. The available data files can be found in the /rvdas/uw directory on the distribution disc.

Sound Velocity Probe (svp1)

08+330:00:00:49.011 1519.35

Field	Data	Units
1	RVDAS Time tag	
2	Sound velocity in ADCP sonar well	m/s

Meteorology (mwx1)

There are 3 different data strings in the mwx1 data file:

MET

08+330:23:59:57.725 MET,12.1,-54,6.64,88.7,111.3374,0.02414567,-
0.4827508,282.9581,281.8823,1005.119

PUS

08+330:23:59:58.546 PUS,A,020,008.53,M,+337.12,+009.00,00,0F

SUS

08+330:23:59:58.779 SUS,A,017,008.76,M,+335.53,+006.35,00,02

MET string

Field	Data	Units
1	RVDAS time tag	
2	MET (string flag)	
3	Power Supply Voltage	V
4	Enclosure Relative Humidity (not currently implemented)	%
5	Air temperature	°C
6	Air Relative Humidity	%
7	PAR (photosynthetically available radiation)*	mV
8	PSP (short wave radiation)*	mV
9	PIR Thermopile (long wave radiation)*	mV
10	PIR Case Temperature	°Kelvin
11	PIR Dome Temperature	°Kelvin
12	Barometer	mBar

*See page 21 for calculations.

PUS string

Field	Data	Units
1	RVDAS time tag	
2	PUS (string flag)	
3	A (unit identification)	
4	Port Wind direction relative	deg
5	Port Wind speed relative	m/s
6	Units	
7	Sound Speed	m/s
8	Sonic Temperature	°C
9	Unit Status (00 or 60 are good, any other value indicates fault)	
10	Check Sum	

SUS string

Field	Data	Units
1	RVDAS time tag	
2	SUS (string flag)	
3	A (unit identification)	
4	Starboard Wind direction relative	deg
5	Starboard Wind speed relative	m/s
6	Units	
7	Sound Speed	m/s
8	Sonic Temperature	°C
9	Unit Status (00 or 60 are good, any other value indicates fault)	
10	Check Sum	

Knudsen (knud)

99+099:00:18:19.775 HF,305.2,LF,304.3

Field	Data	Units
1	RVDAS time tag	
2	HF = High frequency flag (12 kHz)	
3	High frequency depth	meters
4	LF = Low frequency flag (3.5 kHz)	
5	Low frequency depth	meters

Fluorometer (flr1)

This Fluorometer is not in use. The current Fluorometer goes to the hdas string.

00+019:23:59:58.061 0 0818 :: 1/19/00 17:23:17 = 0.983 (RAW) 1.2 (C)

Field	Data	Units
1	RVDAS time tag	
2	Marker 0 to 8	
3	4-digit index	
4	Date	mm/dd/yy
5	Time	hh:mm:ss
6	Signal	
7	Signal units of measurement	
8	Cell temperature (if temperature compensation package is installed)	
9	Temperature units (if temperature compensation package is installed)	

pCO₂ (pco2)

00+021:23:59:43.190 2000021.99920 2382.4 984.2 30.73 50.8 345.9 334.1 -1.70 -
68.046 -144.446 Equil

Field	Data	Units
1	RVDAS time tag	
2	pCO ₂ time tag (decimal is fractional time of day)	yyyyddd.ttt
3	Raw voltage (IR)	mV
4	Cell temperature	°C
5	Barometer	MBar
6	Concentration	ppm
7	Equilibrated temperature	°C
8	pCO ₂ pressure	microAtm
9	Flow rate	ml / min
10	Source ID #	1 or 2 digits
11	Valve position	1 or 2 digits
12	Flow source (Equil = pCO ₂ measurement)	text

Micro-TSG (tsg1)

08+330:23:59:40.894 5.9322, 3.34685, 34.0550, 1473.281

Field	Data	Units
1	RVDAS time tag	
2	Internal Temperature	°C
3	Conductivity	s/m
4	Salinity	PSU
5	Sound velocity	m/s

Micro-TSG #2 (tsg2)

08+330:23:59:40.894 5.9322, 3.34685, 34.0550, 1473.281

Field	Data	Units
1	RVDAS time tag	
2	Internal Temperature	°C
3	Conductivity	s/m
4	Salinity	PSU
5	Sound velocity	m/s

Gravimeter (grv1)

There are now two sets of fields output by the gravity meter. The data record is output once per second, and identified by "\$DAT" in the id field. A summary of sensor environmental data is output every ten seconds, identified by "%ENV" in the id field.

Data record (\$DAT):

05+194:00:00:27.995 \$DAT,2005/ 7/13, 0: 7: 7.36,194, 9050.37, 9050.06, 5410.86, -0.00, -0.01, -0.02, 0.00, 0.00, 0.70, 0.19, -0.12, -0.25, 0.00, -69.45711315, -54.32181487, 0.000, 285.200,

Field	Data	Conversion	Units
1	RVDAS time tag		
2	Text string (id field)	\$DAT for data record	
3	Date	YYYY/MM/DD	
4	Time	HH:MM:SS.SS	
5	Day of Year	DDD	
6	Gravity count	mgal = count x 1.0046 + offset	count
7	Spring Tension		CU
8	Beam Position	Volts x 750,000	
9	VCC		
10	AL		
11	AX		
12	VE		
13	AX2		
14	XACC2		
15	LACC2		
16	CROSS ACCEL		GAL
17	LONG ACCEL		GAL
18	EOTVOS CORR		MGAL
19	LONGITUDE		Degrees
20	LATITUDE		Degrees
21	HEADING		Degrees
22	VELOCITY		Knots

Environmental record (\$ENV)

05+183:19:13:10.945 %ENV,2005/ 7/ 2,19:19:52.16,183,S-036/V1.5, 3.34, 47.19,
20.34,1.111840E-1,-0.57700,-0.10591, 0.40180, 2.55260, 0.43000, 1, 300

Field	Data	Conversion	Units
1	RVDAS time tag		
2	Text string (id field)	\$ENV for environmental record	
3	Date	YYYY/MM/DD	
4	Time	HH:MM:SS.SS	
5	Day of Year	DDD	
6	Meter ID		
7	Meter Pressure		inch-Hg
8	Meter temp		°C
9	Ambient temp		°C
10	K-Factor		
11	VCC Coeff		
12	AL Coeff		
13	AX Coeff		
14	VE Coeff		
15	AX2 Coeff		
16	Serial Filter Length		Seconds
17	QC Filter Length		Seconds

Engineering (eng1)

13+079:10:22:16.035 12.26 19.68 507.4 0.3 173.3 -751.9 0 0 NAN NAN 43.2 85.7

Field	Data	Units
1	RVDAS time tag	
2	Power Supply Voltage	V
3	Internal Case Temperature	°C
4	Pump #1 flow rate (aquarium room)	L/min
5	Pump #2 flow rate (helo deck)	L/min
6	Pump #3 flow rate (hydro-lab)	L/min
7	Seismic air pressure	Lbs/sq-in
8	PIR case resistance (not currently hooked up, data is irrelevant)	Kohm
9	PIR case ratiometric output (not currently hooked up, data is irrelevant)	mV
10	Freezer #1 temperature	°C
11	Freezer #2 temperature	°C
12	Altimeter, OIS benthic (yoyo) camera; distance from the seafloor	m
13	Transmissometer, OIS benthic (yoyo) camera	%

*See page 24 for PIR calculations.

Hydro-DAS (hdas)

08+330:23:59:41.877 12.15836 14.22853 368.9655 4060.69 -1 65.5 65.5 80 57

Field	Data	Units
1	RVDAS time tag	
2	Supply voltage	V
3	Panel temperature	°C
4	Fluorometer	mV
5	Transmissometer	mV
6	Sea Water Valve (-1 = stern thruster valve, 0 = moon pool valve)	
7	Flow meter 1 frequency	Hz
8	Flow meter 2 frequency	Hz
9	Flow meter 3 frequency	Hz
10	Flow meter 4 frequency	Hz

GUV Data (pguv)08+330:23:59:40.328 112508 235940 .000197 1.856E-1 1.116E0 4.987E-2 -1.959E-4
1.637E0 4.153E-3 1.76E0 42.296 17.844

Field	Data	Units
1	RVDAS time tag	
2	Date	mmddyy
3	Time (UTC)	hhmmss
4	Ed0Gnd	V
5	Ed0320	uW (cm ² nm)
6	Ed0340	uW (cm ² nm)
7	Ed0313	uW (cm ² nm)
8	Ed0305	uW (cm ² nm)
9	Ed0380	uW (cm ² nm)
10	Ed0PAR	uE (cm ² nm)
11	Ed0395	uW (cm ² nm)
12	Ed0Temp	°C
13	Ed0Vin	V

Remote Temperature (rtmp)

07+272:00:00:15.960 -1.7870

Field	Data	Units
1	RVDAS time tag	
2	Temperature at seawater intake	°C

Oxygen Data (oxyg)

Internal reference salinity is set to 34 ppt. For further information on this data, contact Sharon Stammerjohn, ssammer@ucsc.edu.

11+011:00:21:48.109 MEASUREMENT 3835 1424 Oxygen: 334.01 Saturation:
 90.71 Temperature: -0.78 DPhase: 37.65 BPhase: 35.95
 RPhase: 0.00 BAmp: 212.13 BPot: 30.00 RAmp: 0.00
 RawTem.: 788.05

Field	Data	Units
1	RVDAS time tag	
2-4	Measurement ID, Model Number, Serial Number	alphanumeric
5	Oxygen heading	text
6	Oxygen Reading	μM
7	Saturation heading	text
8	Saturation Reading	%
9	Temperature heading	text
10	Water Temperature	°C
11	Dphase heading	text
12	Dphase	Raw numeric
13	Rphase heading	Text
14	Rphase	Raw numeric
15	Bamp heading	Text
16	Bamp	Raw numeric
17	Bpot heading	Text
18	Bpot	Raw numeric
19	Ramp heading	Text
20	Ramp	Raw numeric
21	RawTem heading	Text
22	RawTemp	V

Winch Data (bwnc, twnc, cwnc)

13+157:04:20:20.976 ^^A03RD, 2013-06-06T04:20:29.352, BALTIC, 00000236, -
 00000.0, -00009.3, 3306

Field	Data	Units
1	RVDAS time tag	alphanumeric
2	LAN ID	alphanumeric
3	LCI-90i Date and Time	alphanumeric
4	Winch Name	alphanumeric
5	Tension	lbs
6	Speed	m/min
7	Pay-out	m
8	Checksum	numeric

Navigational Data /rvdas/nav**Seapath GPS (seap)**

The Seapath GPS outputs the following data strings, four in NMEA format and two in proprietary PSXN format:

- GPZDA
- GPGGA
- GPVTG
- GPHDT
- PSXN, 20
- PSXN, 22
- PSXN, 23

GPZDA

02+253:00:00:00.772 \$GPZDA,235947.70,09,09,2002,,*7F

Field	Data	Units
1	RVDAS time tag	
2	\$GPZDA	
3	time	hhmmss.ss
4	Day	dd
5	Month	mm
6	Year	yyyy
7	(empty field)	
8	Checksum	

GPGGA

02+253:00:00:00.938

GPGGA,235947.70,6629.239059,S,06827.668899,W,1,07,1.0,11.81,M,,M,,*6F

Field	Data	Units
1	RVDAS time tag	
2	\$GPGGA	
3	time	hhmmss.ss
4	Latitude	ddmm.mmmmmm
5	N or S for north or south latitude	
6	Longitude	ddmm.mmmmmm
7	E or W for east or west longitude	
8	GPS quality indicator, 0=invalid, 1=GPS SPS, 2=DGPS, 3=PPS, 4=RTK, 5=float RTK, 6=dead reckoning	
9	number of satellites in use (00-99)	
10	HDOP	x.x
9	height above ellipsoid in meters	m.mm
11	M	
12	(empty field)	
13	M	
14	age of DGPS corrections in seconds	s.s
15	DGPS reference station ID (0000-1023)	
16	Checksum	

GPVGTG

02+253:00:00:00.940 \$INVTG,19.96,T,,M,4.9,N,,K,A*39

Field	Data	Units
1	RVDAS time tag	
2	\$GPVGTG	
3	course over ground, degrees true	d.dd
4	T	
5	,	
6	M	
7	speed over ground in knots	k.k
8	N	
9	,	
10	K	
11	Mode	
12	Checksum	

GPHDT

02+253:00:00:00.941 \$GPHDT,20.62,T*23

Field	Data	Units
1	RVDAS time tag	
2	\$GPHDT	
3	Heading, degrees true	d.dd
4	T	
5	Checksum	

PSXN,20

02+253:00:00:00.942 \$PSXN,20,0.43,0.43*39

Field	Data	Units
1	RVDAS time tag	
2	\$PSXN	
3	20	
4	Horizontal position & velocity quality: 0=normal, 1=reduced performance, 2=invalid data	
5	Height & vertical velocity quality: 0=normal, 1=reduced performance, 2=invalid data	
6	Heading quality: 0=normal, 1=reduced performance, 2=invalid data	
7	Roll & pitch quality: 0=normal, 1=reduced performance, 2=invalid data	
8	Checksum	

PSXN,22

02+253:00:00:00.942 \$PSXN,22,0.43,0.43*39

Field	Data	Units
1	RVDAS time tag	
2	\$PSXN	
3	22	
4	gyro calibration value since system start-up in degrees	d.dd
5	short term gyro offset in degrees	d.dd
6	Checksum	

PSXN,23

02+253:00:00:02.933 \$PSXN,23,0.47,0.57,20.62,0.03*0C

Field	Data	Units
1	RVDAS time tag	
2	\$PSXN	
3	23	
4	roll in degrees, positive with port side up	d.dd
5	pitch in degrees, positive with bow up	d.dd
6	Heading, degrees true	d.dd
7	heave in meters, positive down	m.mm
8	Checksum	

Trimble (P-Code) GPS (PCOD)

The Trimble GPS, which formerly output Precise Position (*P-Code*) strings, but now only outputs Standard Position (*Civilian*) strings, outputs three NMEA standard data strings:

- Position fix (GGA)
- Latitude / longitude (GLL),
- Track and ground speed (VTG)

GGA: GPS Position Fix – Geoid/Ellipsoid

01+319:00:04:11.193 \$GPGGA,000410.312,6227.8068,S,06043.6738,W,1,06,1.0,
031.9,M,-017.4,M,,*49

Field	Data	Units
1	RVDAS Time tag	
2	\$GPGGA	
3	UTC time at position	hhmmss.sss
4	Latitude	ddmm.mmm
5	North (N) or South (S)	
6	Longitude	ddmm.mmm
7	East (E) or West (W)	
8	GPS quality: 0 = Fix not available or invalid 1 = GPS, SPS mode, fix valid 2 = DGPS (differential GPS), SPS mode, fix valid 3 = P-CODE PPS mode, fix valid	
9	Number of GPS satellites used	
10	HDOP (horizontal dilution of precision)	
11	Antenna height	meters
12	M for meters	
13	Geoidal height	meters
14	M for meters	
15	Age of differential GPS data (no data in the sample string)	
16	Differential reference station ID (no data in the sample string)	
17	Checksum (no delimiter before this field)	

GLL: GPS Latitude/Longitude

01+319:00:04:11.272 \$GPGLL,6227.8068,S,06043.6738,W,000410.312,A*32

Field	Data	Units
1	RVDAS Time tag	
2	\$GPGLL	
3	Latitude	degrees
4	North or South	
5	Longitude	degrees
6	East or West	
7	UTC of position	hhmmss.sss
8	Status of data (A = valid)	
9	Checksum	

VTG: GPS Track and Ground Speed

01+319:00:04:11.273 \$GPVTG,138.8,T,126.0,M,000.0,N,000.0,K*49

Field	Data	Units
1	RVDAS time tag	
2	\$GPVTG	
3	Heading	degrees
4	Degrees true (T)	
5	Heading	degrees
6	Degrees magnetic (M)	
7	Ship speed	knots
8	N = knots	
9	Speed	km/hr
10	K = km per hour	
11	Checksum	

Gyro Compass (gyr1)

00+019:23:59:59.952 \$HEHDT 25034,-020*73

Field	Data	Units
1	RVDAS time tag	
2	\$HEHDT	
3	Heading, Degrees True	degrees
5	Checksum	

ADCP Course (adcp)

00+019:23:59:59.099 \$PUHAW,UVH,-1.48,-0.51,250.6

Field	Data	Units
1	RVDAS time tag	
2	\$PUHAW	
3	UVH (E-W, N-S, Heading)	
4	Ship Speed relative to reference layer, east vector	knots
5	Ship Speed relative to reference layer, north vector	knots
6	Ship heading	degrees

Processed Data /process/**pCO2-merged**

00+346:23:58:20.672 2000346.9991 2398.4 1008.4 0.01 45.4 350.3 342.6 15.77 Equil -
 43.6826 173.1997 15.51 33.90 0.33 5.28 9.05 1007.57 40.0 14.87 182.44 -1

Field	Data	Units
1	RVDAS time tag	
2	pCO ₂ time tag (decimal is fractional time of day)	yyyyddd.ttt
3	Raw voltage (IR)	mV
4	Cell temperature	°C
5	Barometer	MBar
6	Flow rate	ml / min
7	Concentration	ppm
8	pCO ₂ pressure	microAtm
9	Equilibrated temperature	°C
10	Sea Water Temp	1 or 2 digits
11	Valve position	°C
12	Flow source (Equil = pCO ₂ measurement)	text
13	RVDAS latitude	degrees
14	RVDAS longitude	degrees
15	TSG external temperature	°C
16	TSG 1 salinity	PSU
17	Fluorometer	V
18	RVDAS true wind speed	m/s
19	RVDAS true wind direction	degrees
20	Barometric Pressure	mBars
21	Uncontaminated seawater pump flow rate	l/min
22	Speed over ground	knots
23	Course made good	degrees
24	Oxygen	µM
25	TSG 2 internal temperature	°C
26	TSG 2 salinity	PSU
27	TSG 1 internal temperature	°C
28	H2O Input Source	-1 stern thruster 0 moonpool

Calculations

The file `instrument.coeff` located in the `/` directory contains the calibration factors for shipboard instruments. This was the file used by the RVDAS processing software.

PAR

Coefficients `parc1` and `parcv` for this cruise can be found in the `instrument.coeff` file as the variable labeled PAR, respectively. Variable `par` is the raw data in mV, as described in the “mw1” file description. The calibration scale and probe offset dark are values taken from the PAR Cal Sheet.

```
par = raw data mV
calibration scale = 5.8644 V/(μEinstiens/cm2sec)
parc1 = 1 / scale = .17
probe offset dark = -.1 mV
parcv = dark x 1000 mV/V = -0.0001 V
((par / 1000 mV/V) - parcv) x parc1 x 10000 cm2/m2 = μEinstiens/m2sec
```

Calculations (extracted from the C code):

```
/* Convert from mV to V */
par /= 1000;
/* (par V - vdark V) / Calibration Scale Factor V/uE/cm2sec */
parCalc = (par - parcv) * parc1 * 10000;
```

PSP

Coefficient `pspCoeff` for this cruise can be found in the `instrument.coeff` file as the variable labeled PSP1. Variable `psp` is the raw data in mV, as described in the “mw1” file description.

```
psp = raw data mV
calibration scale = pspCoeff x 10^-6 V/(W/m2)
psp / (scale x 1000 mV/V) = W/m2
```

Calculations (extracted from the C code):

```
/* Convert from mV to W/m^2 */
pspCalc = (psp * 1000 / pspCoeff);
```

PIR

Coefficient `pirCoeff` for this cruise can be found in the `instrument.coeff` file as the variable labeled PIR1. Variable `pir_thermo` is the raw data in mV, `pir_case` is the PIR case temperature in Kelvins and `pir_dome` is the PIR dome temperature in Kelvins, as described in the “mw1” file description. Hard-coded “C” coefficients are shown below:

```
Dome constant = 3.5
```

```
Sigma = 5.6704e-8
```

```
pir_thermo = raw data mV
```

```
calibration scale = pirCoeff x 10^-6 V/(W/m2)
```

```
pir_thermo / (scale x 1000 mV/V) = W/m2
```

Calculations (extracted from the C code):

```
/* convert mV to W/m^2 */
pirCalc = (pir_thermo * 1000 / pirCoeff)
/* correct for case temperature */
pirCalc += sigma * pow(pir_case,4)
/* correct for dome temperature */
pirCalc -= 3.5 * sigma * (pow(pir_dome, 4) - pow(pir_case, 4))
```

Acquisition Problems and Events

This section lists problems with acquisition noted during this cruise including instrument failures, data acquisition system failures and any other factor affecting this data set. The format is ddd:hh:mm (ddd is year-day, hh is hour, and mm is minute). Times are reported in UTC.

Start	End	Description
301:00:00		Data collection started -54° 09.84, -65° 38.6
311:15:54		TSG-2 bypassed for cleaning
	311:17:08	TSG-2 reconnected, logging resumed
311:17:21		TSG-1 stopped for cleaning
	311:18:22	TSG-2 restarted
316:02:50		Data collection stopped -55° 01.99 -64° 58.107

Appendix: Sensors and Calibrations

Sensor	Serial Number	Last Cal.	Comments
Meteorology & Radiometers			
Stbd Anemometer (Gill US)	847014	9/29/2010	Installed 11/17/2010
Port Anemometer (Gill US)	924057	11/18/09	Installed 3/5/2010
Barometer	01706	1/26/2012	Installed 5/9/2013
Humidity/Wet Temp	06135	11/29/2012	Installed 9/11/2013
PIR	33023F3	7/20/2011	Installed 4/7/2013
PSP	33090F3	7/19/2011	Installed 4/7/2013
Mast PAR	6357	12/27/2012	Installed 9/11/2013
GUV (Mast)	25110203114	12/18/2012	Installed 9/11/2013
Underway			
Micro-TSG #1 (until 3/4/13)	4546167-0242	12/29/2012	Installed 5/9/2013
Micro-TSG #2	4566350-0389	10/20/2011	Installed 9/7/2012
Digital Remote Temp	3849120-0178	9/21/2012	Installed 5/9/2013
Oxygen Optode	3835-1424	10/21/2010	Installed 12/30/2010
Fluorometer	AFL-016D	8/22/2012	Installed 9/11/2013
Transmissometer	CST-439DR	8/17/2012	Installed 2/11/2013
CTD			
CTD Fish	09P70675-1130	12/11/2012	5/13/2013
CTD Fish Pressure	120089	12/11/2012	5/13/2013
CTD Deck Unit	11P19858-0490	N/A	11/8/2007
Slip-Ring Assembly	1.406	N/A	3/27/04
Carousel Water Sampler	3214153-0140	N/A	2/13/2013
Pump (primary)	055641 3.0K	05/03/2010	Installed 10/26/2013
Pump (secondary)	055643 3.0K	05/03/2010	Installed 10/26/2013
Temperature (primary)	031457	6/26/2013	Installed 10/26/2013
Temperature (secondary)	3P2470	02/07/2012	Installed 10/26/2013 from LMG
Conductivity (primary)	041314	2/7/2013	Installed 10/26/2013
Conductivity (secondary)	044151	11/16/2012	Installed 10/26/2013
Dissolved Oxygen (primary)	430080	2/13/2013	Installed 10/26/2013 Failed on cast 1
Dissolved Oxygen (primary)	432512	12/14/2012	Installed 10/29/2013
Altimeter	42434	N/A	Installed 10/26/2013
Turbidity Meter (Seapoint)	11290	N/A	Installed 10/26/2013

Mast Barometer

R.M. Young Company
2801 Aero Park Drive
Traverse City, Michigan 49686 USA

CALIBRATION REPORT**Barometric Pressure**

Customer: *Raytheon Technical Services Company LLC*

Test Number: 2128-01B

Customer PO: RR64145-01

Test Date: 26 January 2012

Sales Order: 2430

Test Sensor:

Model: 61201 Serial Number: *BP01706*
Description: Barometric Pressure Sensor

Report of calibration comparison of test barometric pressure sensor with National Institute of Standards and Technology traceable standard pressure calibrator at five pressures in the R.M. Young Company controlled pressure facility. Calibration accuracy ± 1.0 hPa.

Reference Pressure (hPa)	Voltage Output (millivolts)	Indicated (1) Pressure (hPa)
800.0	0	800.0
875.0	1251	875.0
950.0	2501	950.1
1025.0	3750	1025.0
1100.0	4998	1099.9

(1) Calculated from voltage output

All reference equipment used in this calibration procedure have been tested by comparison to traceable standards certified by the National Institute of Standards and Technology.

Reference Instrument

Druck Pressure Controller Model DPI515
Fluke Multimeter Model 8080A

Serial # NIST Test Reference

51500497 UKAS Lab 0221
4865407 234027

Tested By: *E. Chennery*

METEOROLOGICAL INSTRUMENTS

Tel: 231-946-3980 Fax: 231-946-4772 Email: met.sales@youngusa.com Website: youngusa.com
ISO 9001:2008 CERTIFIED



R.M. Young Company
2801 Aero Park Drive
Traverse City, Michigan 49686 USA



CALIBRATION REPORT
Relative Humidity

Customer: *Lockheed Martin Maritime Systems & Sensors*

Test Number: 2044-02R

Customer PO: 4900027957

Test Date: 29 November 2012

Sales Order: 2973

Test Sensor:

Model: 41372LC

Serial Number: 7306135

Description: Temperature/Relative Humidity Sensor

Report of calibration comparison of test relative humidity sensor with National Institute of Standards and Technology traceable standard relative humidity sensor at five humidity levels in the R.M. Young Company controlled humidity chamber facility. Calibration accuracy ± 2.0 %.

Reference Humidity (%)	Current Output (milliamps)	Indicated (1) Humidity (%)
10.0	5.9	12.1
30.0	9.0	31.2
50.0	12.4	52.3
69.9	15.4	71.0
89.9	18.1	88.1

(1) Calculated from voltage output

All reference equipment used in this calibration procedure have been tested by comparison to traceable standards certified by the National Institute of Standards and Technology.

Reference Instrument

Vaisala Humidity Sensor Model 35AC
Fluke Multimeter Model 6080A

Serial # NIST Test Reference

N475040 TN 2661E2
4855407 234027

Tested By: *E. Channing*

METEOROLOGICAL INSTRUMENTS
Tel: 231-948-3880 Fax: 231-946-4772 Email: metesales@youngusa.com Website: youngusa.com
ISO 9001:2008 CERTIFIED

Mast Temperature Sensor

R.M. Young Company
2801 Allen Park Drive
Traverse City, Michigan 49686 USA



CALIBRATION REPORT Temperature

Customer: *Lockheed Martin Maritime Systems & Sensors*

Test Number: 2044-021

Customer PO: 4900027957

Test Date: 29 November 2012

Sales Order: 2973

Test Sensor:

Model: 41372LC Serial Number: TS03135
Description: Temperature/Relative Humidity Sensor

Report of calibration comparison of test temperature sensor with National Institute of Standards and Technology traceable standard thermometers at three temperatures in the R.M. Young Company controlled temperature calibration bath facilities. Calibration accuracy $\pm 0.1^\circ$ Celsius.

Bath Temperature (degrees C)	Current Output (milliamps)	Indicated (1) Temperature (degrees C)
-49.86	4.023	-49.66
0.03	12.008	0.05
50.18	20.029	50.18

(1) Calculated from current output

All reference equipment used in this calibration procedure have been tested by comparison to traceable standards certified by the National Institute of Standards and Technology.

Reference Instrument	Serial #	NIST Test Reference
Brooklyn Thermometer Model 43-FC	8006-118	204365
Brooklyn Thermometer Model 22332-D6-FC	25071	249763
Brooklyn Thermometer Model 2X400-D7-FC	77532	228030
Keithley Multimeter Model 191	15232	234027

Tested By: E. Chennery

METEOROLOGICAL INSTRUMENTS
Tel: 231-946-3060 Fax: 231-946-4772 Email: metesales@youngusa.com Website: young.usa.com
ISO 9001:2008 CERTIFIED

Mast PIR



THE EPPLEY LABORATORY, INC.

12 Sheffield Avenue, PO Box 419, Newport, Rhode Island USA 02840
Phone: 401.847.1020 Fax: 401.847.1031 Email: info@epplab.com

**STANDARDIZATION OF
EPPLEY PRECISION INFRARED RADIOMETER
Model PIR**

Serial Number: 33023F3

Resistance: 739 Ω at 23°C

Temperature Compensation Range: -20° to +40°C

This pyrgeometer has been compared against Eppley's Blackbody Calibration System under radiation intensities of approximately 200 watts meter⁻² and an average ambient temperature of 25°C as measured by Standard Omega Temperature Probe, RTD#1.

As a result of a series of comparisons, it has been found to have a sensitivity of:

$$3.85 \times 10^{-5} \text{ volts/watts meter}^{-2}$$

The calculation of this constant is based on the fact that the relationship between radiation intensity and emf is rectilinear to intensities of 700 watts meter⁻². This radiometer is linear to within ±1.0% up to this intensity.

The calibration of this instrument is traceable to the International Practical Temperature Scale (IPTS) through a precision low-temperature blackbody.

Eppley recommends a minimum calibration cycle of five (5) years but encourages annual calibrations for highest measurement accuracy. Unless otherwise stated in the remarks section below or on the Sales Order, the results are "AS FOUND / AS LEFT".

Shipped to: Raytheon Polar Services NSF
Port Hueneme, CA

Date of Test: July 20, 2011

S.O. Number: 63090

In Charge of Test: *Debra L. Hurty*

Date: July 28, 2011

Reviewed by: *Thomas D. Kirk*

Remarks:





THE EPPLEY LABORATORY, INC.

12 Sheffield Avenue, PO Box 419, Newport, Rhode Island USA 02840
Phone: 401.847.1020 Fax: 401.877.1021 Email: info@eppleylab.com

STANDARDIZATION OF EPPLEY PRECISION SPECTRAL PYRANOMETER Model PSP

Serial Number: 33090F3

Resistance: 700 Ω at 23°C

Temperature Compensation Range: -20° to +40°C

This radiometer has been compared with Standard Precision Spectral Pyranometer, Serial Number 21231F3 in Eppley's Integrating Hemisphere under radiation intensities of approximately 700 watts meter⁻² (roughly one half a solar constant).

As a result of a series of comparisons, it has been found to have a sensitivity of:

$$3.03 \times 10^{-6} \text{ volts/watts meter}^{-2}$$

The calculation of this constant is based on the fact that the relationship between radiation intensity and emf is rectilinear to intensities of 1400 watts meter⁻². This radiometer is linear to within $\pm 0.5\%$ up to this intensity.

The calibration of this instrument is traceable to standard self-calibrating cavity pyrheliometers in terms of the Systeme Internationale des Unites (SI units), which participated in the Tenth International Pyrheliometric Comparisons (IPC X) at Davos, Switzerland in September-October 2005.

Eppley recommends a minimum calibration cycle of five (5) years but encourages annual calibrations for highest measurement accuracy. Unless otherwise stated in the remarks section below or on the Sales Order, the results are "AS FOUND / AS LEFT".

Useful conversion facts: $1 \text{ cal cm}^{-2} \text{ min}^{-1} = 697.3 \text{ watts meter}^{-2}$
 $1 \text{ BTU/ft}^2\text{-hr}^{-1} = 3.153 \text{ watts meter}^{-2}$

Shipped to: Raytheon Polar Services NSF
Port Hueneme, CA

Date of Test: July 19, 2011

S.O. Number: 63091

In Charge of Test: *Debra L. Hignite*

Date: July 28, 2011

Reviewed by: *Thomas H. Kunk*

Remarks:



Biospherical Instruments Inc.

CALIBRATION CERTIFICATE

Calibration Date: 12/27/2012
Model Number: QSR-240
Serial Number: 6357
Operator: TPC
Standard Lamp: V-C31(3/7/12)
Probe Excitation Voltage Range: 6 to 18 VDC(+)
Output Polarity: Positive

Probe Conditions at Calibration(in air):

Calibration Voltage: 6 VDC(+)
Probe Current: 7.2 mA

Probe Output Voltage:

Probe Illuminated: 98.3 mV
Probe Dark: 1.0 mV
Probe Net Response: 97.3 mV
RG780: 1.0 mV

Corrected Lamp Output:

Output In Air (same condition as calibration):

1.044E+16 quanta/cm²sec
0.01733 uE/cm²sec

Calibration Scale Factor:

(To calculate irradiance, divide the net voltage reading in Volts by this value.)

Dry: 9.3240E-18 V/(quanta/cm²sec)
5.6149E+00 V/(uE/cm²sec)

Notes:

1. Annual calibration is recommended.
2. Calibration is performed using a Standard of Spectral Irradiance traceable to the National Institute of Standards and Technology (NIST).
3. The collector should be cleaned frequently with alcohol.
4. Calibration was performed with customer cable, when available.

QSR240R 05/24/95





THE INSTRUMENTS REFERENCED BELOW WERE FACTORY TESTED AND CALIBRATED BY

5340 Riley Street

San Diego, California 92110 USA

Instruments: GUV-2511 No 25110203114

NIST Traceability. For wavelengths longer than 313 nm, the specific instruments cited here were calibrated using a 1000W FEL #V-031(3/7/12) following procedures and standards traceable to NIST Standard of Spectral Irradiance F616. Traceability paths and all procedures for all calibrated lamps and associated apparatus (shunts, power supplies, DMMs, etc) are maintained following calibration methodologies per National Bureau of Standards (US) (NBS) Special Publication 250-20 Spectral Irradiance Calibrations (1987) and NBS Publication 594-13 Optical Radiation Measurements: The 1973 Scale of Spectral Irradiance (1977).

Solar Calibrations. Lamp calibrations are problematic for solar UV measurements (wavelengths below 320 nm) because the solar spectrum is radically different from the lamp spectrum and changes greatly as a function of wavelength. Solar calibrations are achieved through direct comparison with measurements of a high resolution scanning spectroradiometer in San Diego (SUV-100), which is part of the National Science Foundation's UV Monitoring Network. The SUV-100 instrument has a bandwidth of 1 nm. Calibrated filter radiometer data therefore report spectral irradiance at the channel's nominal wavelengths with a bandwidth of 1 nm. Solar calibrations are typically accurate to within $\pm 10\%$ for solar zenith angles smaller than 75° . At larger solar zenith angles, UV channels have a greater uncertainty due to the rapid change of the solar UV spectrum.

Note that this certificate contains a subset of the information delivered in the calibration database 25110203114v7.mdb. This database is required for operation of this system using Biospherical Instruments Inc.'s Logger® software.



System Serial Number		25110203114				Date of Calibration		12/18/2012	
Calibration database		25110203114v7.mdb				Date of Certificate		12/18/2012	
DASSN		0069				Standard of Spectral Irradiance		V-031(37/12)	
Microprocessor Tag Number		4				Operator		TC	

Monochromatic		Wavelength	Responsivity	ScaleSmall	ScaleMedium	ScaleLarge	OffsetSmall	OffsetMedium	OffsetLarge	Measurement
Channels	Address	[nm]	[Amps per μW/(cm ² -nm)]	[Volts per μW/(cm ² -nm)]	[Volts per μW/(cm ² -nm)]	[Volts per μW/(cm ² -nm)]	[volts]	m [volts]	[volts]	Units
Ed0320	2	320	2.310E-05	2.3553E-05	6.8841E-03	2.7219E+00	6.8000E-05	7.1000E-05	5.8600E-04	μW/(cm ² nm)
Ed0340	6	340	1.8298E-05	1.8664E-05	5.4529E-03	1.8705E+00	7.8000E-05	9.0000E-05	8.2900E-04	μW/(cm ² nm)
Ed0313	8	313	2.3000E-05	2.3428E-05	6.8446E-03	2.4027E+00	9.2400E-04	9.2000E-04	-1.3310E-03	μW/(cm ² nm)
Ed0305	10	305	1.0300E-11	1.0554E-06	3.0836E-04	1.0599E-01	3.6800E-04	3.7000E-04	1.1140E-03	μW/(cm ² nm)
Ed0380	12	380	8.0945E-11	8.2564E-06	2.4122E-03	7.7368E-01	2.7600E-04	2.7600E-04	-1.0800E-04	μW/(cm ² nm)
Ed0395	18	395	2.8798E-06	2.9374E-05	8.5818E-03	2.7127E+00	3.8900E-04	3.9300E-04	1.4470E-03	μW/(cm ² nm)

Broadband		Wavelength	Responsivity	ScaleSmall	ScaleMedium	ScaleLarge	OffsetSmall	OffsetMedium	OffsetLarge	Measurement
Channels	Address	[nm]	[Amps per μE/(cm ² -e)]	[Volts per μE/(cm ² -e)]	[Volts per μE/(cm ² -e)]	[Volts per μE/(cm ² -e)]	[volts]	m [volts]	[volts]	Units
EdOPAR	13	400-700	1.7033E-05	1.7374E+00	5.0759E+02	1.7939E+05	5.7300E-04	5.7100E-04	-4.7800E-04	μE/(cm ² sec)

Auxiliary									Measurement	
Channels	Address	Wavelength	Responsivity	ScaleS	ScaleM	ScaleL	Offsets	OffsetM	OffsetL	Units
Ed0Temp	22	0	1.0000E+00	1.0000E-02	1.0000E-02	1.0000E-02	0.0000E+00	0.0000E+00	0.0000E+00	C
Ed0VIn	27	0	1.0000E+00	-2.5000E-01	-2.5000E-01	-2.5000E-01	0.0000E+00	0.0000E+00	0.0000E+00	V

© Biospherical Instruments Inc., 5340 Riley Street, San Diego, California 92110 USA. Contact support@biospherical.com for more information.



CALIBRATION CERTIFICATE

Form No. 622, Dec 2005
Page 1 of 2

Sensing Foil Batch No: 5009
Certificate No:

Product: Oxygen Optode 3835
Serial No: 1424
Calibration Date: 21 October 2010

This is to certify that this product has been calibrated using the following instruments:

Calibration Bath model FNT
ASL Digital Thermometer model F250

321-1-40
Serial: 6792/06

Parameter: Internal Temperature:

Calibration points and readings:

Temperature (°C)	1.17	12.12	24.11	36.08
Reading (mV)	730.09	383.95	-11.29	-379.10

Giving these coefficients

Index	0	1	2	3
TempCoef	2.37613E01	-3.08128E-02	2.84735E-06	-4.15311E-09

Parameter: Oxygen:

	O2 Concentration	Air Saturation
Range:	0-500 μM ¹⁾	0 - 120%
Accuracy ¹⁾ :	< $\pm 8\mu\text{M}$ or $\pm 5\%$ (whichever is greater)	$\pm 5\%$
Resolution:	< 1 μM	< 0.4%
Settling Time (63%):	< 25 seconds	

Calibration points and readings²⁾:

	Air Saturated Water	Zero Solution (Na ₂ SO ₃)
Phase reading (°)	3.27669E+01	6.65595E+01
Temperature reading (°C)	9.90918E+00	2.04774E+01
Air Pressure (hPa)	9.76884E+02	

Giving these coefficients

Index	0	1	2	3
PhaseCoef	-4.44928E00	1.17131E00	0.00000E00	0.00000E00

¹⁾ Valid for 0 to 2000m (6562ft) depth, salinity 33 - 37ppt

²⁾ The calibration is performed in fresh water and the salinity setting is set to: 0

AANDERAA DATA INSTRUMENTS AS

5351 BERGEN, NORWAY Tel. +47 55 60 46 00 Fax. +47 55 60 48 01 E-mail: info@aad.no Web: <http://www.aad.no>



AANDERAA DATA INSTRUMENTS

CALIBRATION CERTIFICATE

Form No. 622, Dec 2005

Page 2 of 2

Sensing Foil Batch No: 5009
Certificate No:

Product: Oxygen Optode 3835
Serial No: 1424
Calibration Date: 21 October 2010

SR10 Scaling Coefficients:

At the SR10 output the Oxygen Optode 3830 can give either absolute oxygen concentration in μM or air saturation in %. The setting of the internal property "Output"³⁾, controls the selection of the unit. The coefficients for converting SR10 raw data to engineering units are fixed.

Output = -1	Output = -2
A = 0	A = 0
B = 4.883E-01	B = 1.465E-01
C = 0	C = 0
D = 0	D = 0
Oxygen (μM) = $A + BN + CN^2 + DN^3$	Oxygen (%) = $A + BN + CN^2 + DN^3$

³⁾ The default output setting is set to -1

Date: 22 October 2010

Sign:

Tor Ole Kvaløystad Calibration Engineer

AANDERAA DATA INSTRUMENTS AS

5351 BERGEN, NORWAY

Tel. +47 55 60 46 00

Fax. +47 55 60 46 01

E-mail: info@aadi.noWeb: <http://www.aadi.no>



AANDERAA DATA INSTRUMENTS

CALIBRATION CERTIFICATE

Form No. 621, Dec 2005

Certificate No: 3853_5009_40331
Batch No: 5009

Product: O2 Sensing Foil PSt3 3853
Calibration Date: 2 June 2010

Calibration points and phase readings (degrees)

Temperature (°C)	3.97	10.93	20.15	29.32	38.39
Pressure (hPa)	977.00	977.00	977.00	977.00	977.00
O2 in % of O2+N2	0.00	73.18	72.63	71.62	70.72
	1.00	68.01	67.02	65.42	63.92
	2.00	64.39	63.16	61.20	59.44
	5.00	55.80	54.16	51.76	49.56
	10.00	46.27	44.47	41.97	39.75
	20.90	35.09	33.38	31.14	29.24
	30.00	29.85	28.30	26.31	24.64

Giving these coefficients ¹⁾

Index	0	1	2	3
C0 Coefficient	4.53793E+03	-1.62595E+02	3.29574E+00	-2.79285E-02
C1 Coefficient	-2.50953E+02	8.02322E+00	-1.58398E-01	1.31141E-03
C2 Coefficient	5.66417E+00	-1.59647E-01	3.07910E-03	-2.46265E-05
C3 Coefficient	-5.99449E-02	1.48326E-03	-2.82110E-05	2.15156E-07
C4 Coefficient	2.43614E-04	-5.26759E-06	1.00064E-07	-7.14320E-10

¹⁾ Ask for Form No 621S when this O2 Sensing Foil is used in Oxygen Sensor 3830 with Serial Numbers lower than 184.

Date: 11/4/2010

Sign:

Tor Ole Kvaløystad Calibration Engineer

AANDERAA DATA INSTRUMENTS AS

5351 BERGEN, NORWAY

Tel. +47 55 60 46 00

Fax. +47 55 60 46 01

E-mail: info@aadi.noWeb: <http://www.aadi.no>

Underway Micro-TSG number 1

Sea-Bird Electronics, Inc.

13431 NE 20th Street, Bellevue, WA 98005-2010 USA

Phone: (+1) 425-643-9866 Fax (+1) 425-643-9954 Email: seabird@seabird.com

SENSOR SERIAL NUMBER: 0742
CALIBRATION DATE: 29-Dec-12SBE 45 CONDUCTIVITY CALIBRATION DATA
PSS 1978: C(35,15,0) = 4.2914 Siemens/meter

COEFFICIENTS:

g = -9.992296e-001
h = 1.524743e-001
i = -4.722991e-004
j = 6.065458e-005CPcor = -9.5700e-008
CTcor = 3.2500e-006
WBOTC = -0.0000e+000


BATH TEMP (ITS-90)	BATH SAL (PSU)	BATH COND (Siemens/m)	INST FREQ (Hz)	INST COND (Siemens/m)	RESIDUAL (Siemens/m)
22.0000	0.0000	0.00000	2566.82	0.00000	0.00000
1.0000	34.8118	2.97562	5119.70	2.97561	-0.00001
4.5000	34.7917	3.28263	5313.24	3.28264	0.00001
15.0000	34.7487	4.26420	5888.60	4.26420	0.00000
18.5000	34.7394	4.60927	6077.64	4.60927	0.00001
24.0000	34.7293	5.16711	6371.04	5.16711	-0.00001
29.0000	34.7238	5.68887	6633.34	5.68886	-0.00001
32.5000	34.7207	6.06120	6814.13	6.06121	0.00001

f = INST FREQ * sqrt(1.0 + WBOTC * t) / 1000.0

Conductivity = (g + hf² + if³ + jf⁴) / (1 + δt + εp) Siemens/meter

t = temperature[°C]; p = pressure(decibars); δ = CTcor; ε = CPcor;

Residual = instrument conductivity - bath conductivity

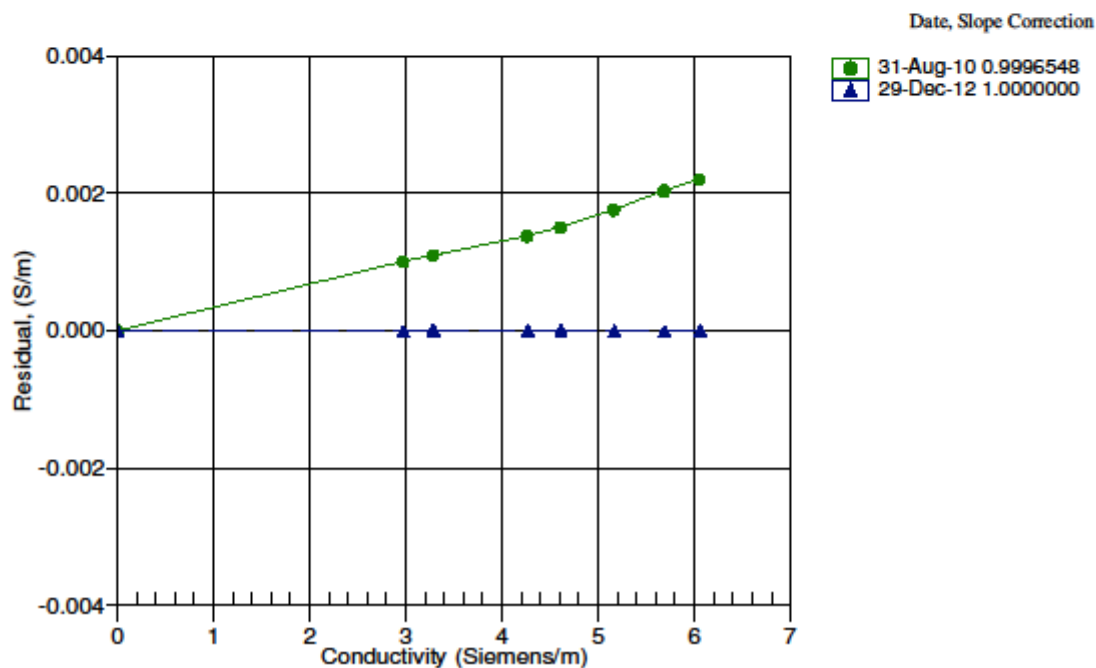

Sea-Bird Electronics, Inc.

13431 NE 20th Street, Bellevue, WA 98005-2010 USA

Phone: (+1) 425-643-9866 Fax (+1) 425-643-9954 Email: seabird@seabird.com

SENSOR SERIAL NUMBER: 0742
CALIBRATION DATE: 29-Dec-12SBE 45 TEMPERATURE CALIBRATION DATA
ITS-90 TEMPERATURE SCALE

ITS-90 COEFFICIENTS

a0 = 4.555848e-005

a1 = 2.733778e-004


a2 = -2.324224e-006

a3 = 1.499077e-007

BATH TEMP (ITS-90)	INSTRUMENT OUTPUT	INST TEMP (ITS-90)	RESIDUAL (ITS-90)
1.0000	649816.0	1.0000	0.0000
4.5000	554883.5	4.5000	-0.0000
15.0000	352327.7	15.0000	-0.0000
18.5000	304717.7	18.5000	0.0000
24.0000	244011.0	24.0000	0.0000
29.0000	200602.2	29.0000	-0.0000
32.5000	175478.8	32.5000	0.0000

$$\text{Temperature ITS-90} = 1/[a0 + a1[\ln(n)] + a2[\ln^2(n)] + a3[\ln^3(n)]] - 273.15 \text{ (}^\circ\text{C)}$$

Residual = instrument temperature - bath temperature

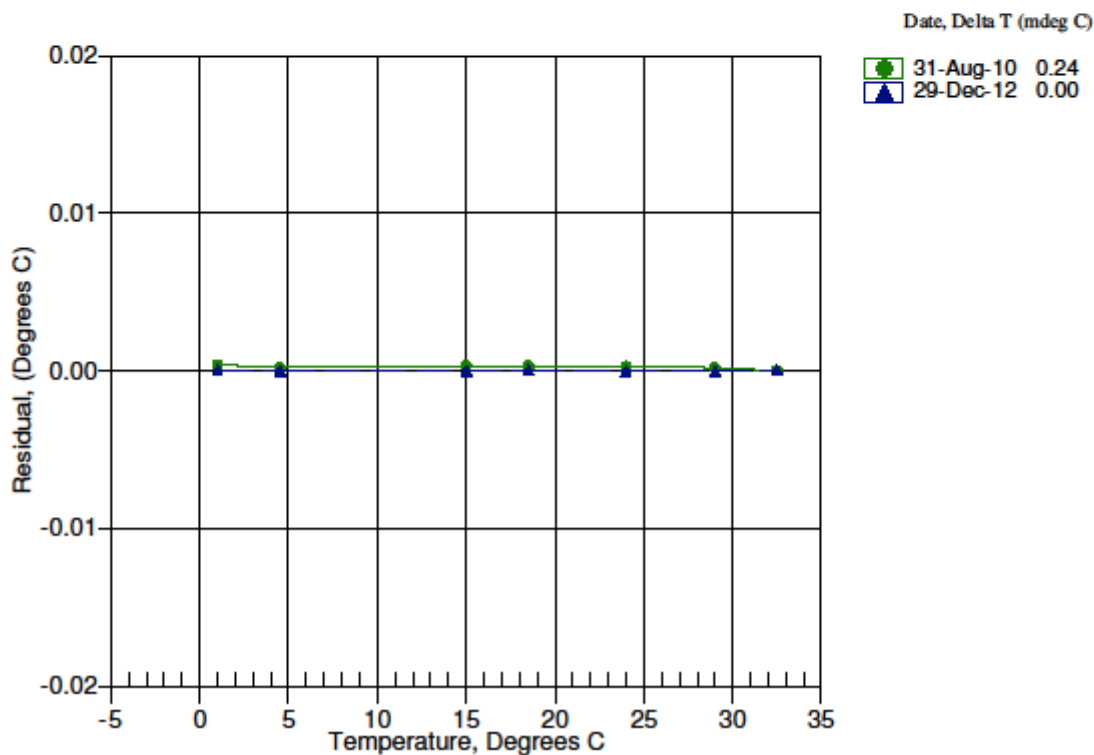

Underway Micro-TSG number 2

8

Sea-Bird Electronics, Inc.

13431 NE 20th Street, Bellevue, WA 98005-2010 USA

Phone: (+1) 425-643-8388 Fax: (+1) 425-643-9954 Email: seabird@seabird.com

Micro TSG

SENSOR SERIAL NUMBER: 0389
CALIBRATION DATE: 20-Oct-11SBB-45 CONDUCTIVITY CALIBRATION DATA
PSS 1978: C(35, 5.0) = 4.2014 Siemens/meter

COEFFICIENTS:

 $a = -9.366211e-001$ $b = 1.453863e-001$ $i = 4.5022911e-004$ $j = 3.189313e-002$ $CT_{cor} = 3.57600e-006$ $CT_{por} = 3.12500e-006$ $WDTC = 1.2700e-007$


BATH TEMP (ITS-90)	BATH SAL (PSU)	BATH COND (Siemens/m)	INST FREQ (Hz)	INST COND (Siemens/m)	RESIDUAL (Siemens/m)
22.0000	34.9200	3.30003	2014.51	3.00000	0.00000
1.0000	34.9210	2.98405	5244.92	2.98436	0.00000
4.5000	34.9005	3.29188	5043.39	3.29188	-0.00000
14.3990	34.8864	4.27003	6033.44	4.27021	0.00000
18.4995	34.8867	4.62155	6235.28	4.62185	-0.00000
27.0000	34.8804	5.18113	6528.11	5.18115	-0.00000
29.0000	34.8277	5.70357	6793.07	5.70387	-0.00000
32.5000	34.8211	6.07673	6962.11	6.07653	0.00000

 $f = \text{INST FREQ} \cdot \sqrt{a + b \cdot \text{WDTC} \cdot f} / 1000.0$ Conductivity = $(g + hf^2 + if^3 + jf^4) / (1 - \delta + \epsilon p)$ Siemens/meter $t = \text{temperature} [^{\circ}\text{C}]$; $p = \text{pressure} [\text{decibars}]$; $\delta = CT_{cor}$; $\epsilon = CT_{por}$

Residual = Instrument conductivity - bath conductivity

Date, Slope Correction

20-Oct-11 1.0000000

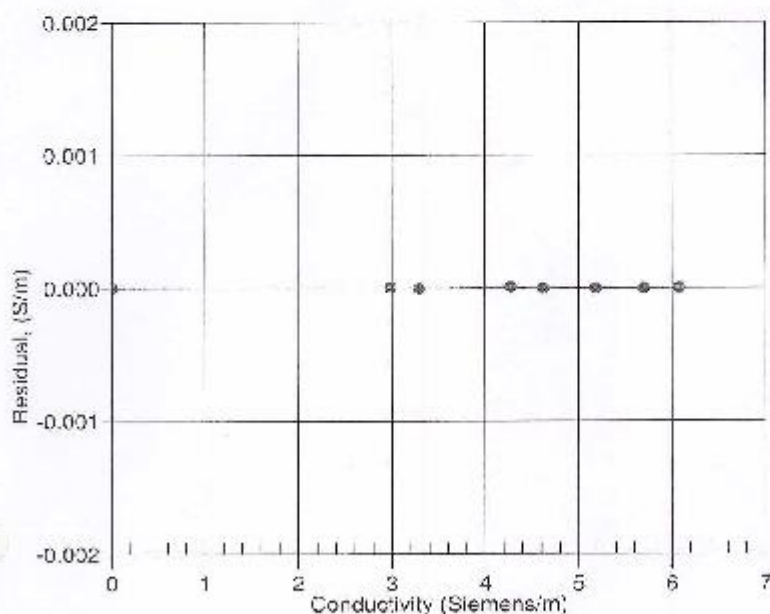

Sea-Bird Electronics, Inc.

13431 NE 20th Street, Bellevue, WA 98005-2010 USA

Phone: (+1) 425-843-9866 Fax: (+1) 425-843-0654 Email: seabird@seabird.com

*Micro TSG*SENSOR SERIAL NUMBER: 0380
CALIBRATION DATE: 20 Oct 11SBE 45 TEMPERATURE CALIBRATION DATA
ITS-90 TEMPERATURE SCALE

ITS-90 COEFFICIENTS

$a_0 = 3.173853e-003$
 $a_1 = 2.856137e-004$
 $a_2 = -1.828637e-006$
 $a_3 = 1.127174e-007$


BATH TEMP (ITS-90)	INSTRUMENT OUTPUT	INST TEMP (ITS-90)	RESIDUAL (ITS-90)
1.0000	828514.5	0.0000	0.0001
4.0000	706709.4	4.4996	-0.0002
24.8999	447335.7	15.0000	0.0001
28.4999	386307.8	10.5000	0.0001
28.0000	308342.8	23.5000	-0.0001
28.0000	253727.7	29.0000	-0.0006
32.0000	221749.8	30.5000	0.0006

$$\text{Temperature ITS-90} = 1/(a_0 + a_1[\ln(t)] + a_2[\ln^2(t)] + a_3[\ln^3(t)]) - 273.15 \text{ (}^\circ\text{C)}$$

Residuals = instrument temperature - bath temperature

Date, Delta T (mdeg C)

● 20-Oct-11 0.00

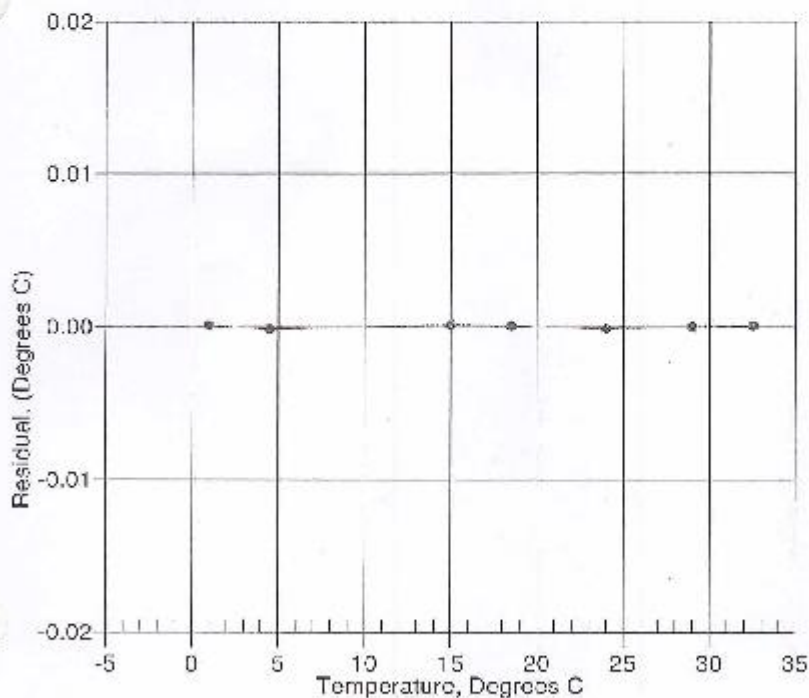

Underway Digital Remote Temperature**Sea-Bird Electronics, Inc.**

13431 NE 20th Street, Bellevue, WA 98005-2010 USA

Phone: (+1) 425-643-9866 Fax (+1) 425-643-9954 Email: seabird@seabird.com


SENSOR SERIAL NUMBER: 0178
CALIBRATION DATE: 21-Sep-12SBE 38 TEMPERATURE CALIBRATION DATA
ITS-90 TEMPERATURE SCALE**ITS-90 COEFFICIENTS**

$a_0 = -4.740793e-005$
 $a_1 = 2.820902e-004$
 $a_2 = -2.754939e-006$
 $a_3 = 1.681819e-007$

BATH TEMP (ITS-90)	INSTRUMENT OUTPUT	INST TEMP (ITS-90)	RESIDUAL (ITS-90)
-1.50000	750879.8	-1.49997	0.00003
1.00000	671250.6	0.99996	-0.00004
4.50000	575382.9	4.49998	-0.00002
8.00000	494802.5	7.99999	-0.00001
11.50000	426843.9	11.50002	0.00002
15.00000	369343.4	15.00002	0.00002
18.50000	320537.2	18.49998	-0.00002
21.99990	278981.8	21.99999	0.00009
25.50000	243494.9	25.49993	-0.00007
28.99990	213101.3	28.99982	-0.00008
32.49990	186993.9	32.49996	0.00006

$$\text{Temperature ITS-90} = 1/[a_0 + a_1[\ln(n)] + a_2[\ln^2(n)] + a_3[\ln^3(n)]] - 273.15 \text{ (}^\circ\text{C)}$$

Residual = instrument temperature - bath temperature

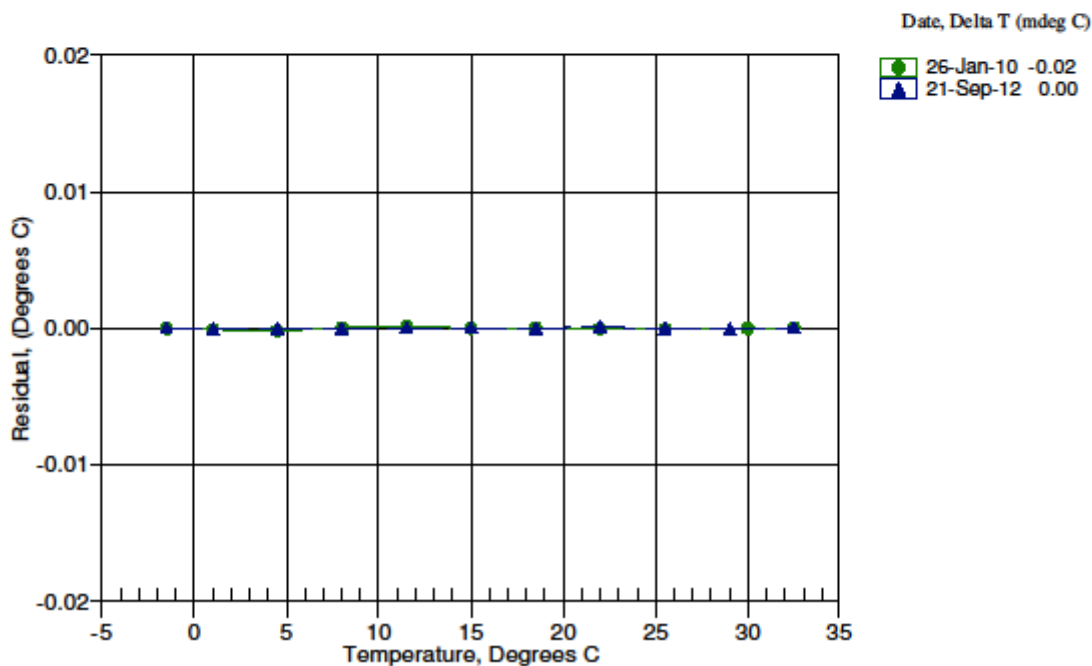

PO Box 518
620 Applegate St
Philomath OR 97370



(541) 929-5650
Fax (541) 929-5277
<http://www.wetlabs.com>

Chlorophyll Fluorometer Characterization in Uranine liquid Proxy (new method)

Date: 08/22/12
Serial #: AFL-016D
Tech: dcm

Dark Counts 0.152 volts
CEV 1.195 volts
SF 25.311
FSV 4.61 volts
Linearity: 0.999 R² (0–1.5 volts)
0.995 R² (0– 5.45 volts)

Notes:

Dark Counts: Signal output of the meter in clean water with black tape over detector.

CEV is the chlorophyll equivalent voltage. This value is the signal output of the fluorometer when using a Uranine dye fluorescent proxy that has been determined to be approximately equivalent to 26.4 µg/l of a *Thalassiosira weissflogii* phytoplankton culture.

SF is the scale factor used to derive chlorophyll concentration from the signal voltage output of the fluorometer. The scale factor is determined by using the following equation:
 $SF = (26.4) / (CEV - \text{dark})$.

FSV is the maximum signal voltage output that the fluorometer is capable of.

Chlorophyll concentration expressed in µg/l (mg/m³) can be derived by using the following equation: (µg/l) = (V_{measured} – dark) * SF

The relationship between fluorescence and chlorophyll-*a* concentrations in-situ is highly variable. The scale factor listed on this document was determined by using a mono-culture of phytoplankton (*Thalassiosira weissflogii*). The population was assumed to be reasonably healthy and the concentration was determined by using the absorption method. To accurately determine chlorophyll concentration using a fluorometer you must perform secondary measurements on the populations of interest. This is typically done using extraction based measurement techniques on discrete samples. For additional information on determination of chlorophyll concentration see [Standard Methods For The Examination Of Water And Wastewater] part 10200 H published jointly by: American Public Health Association, American Water Works Association and Water Environment Federation.

PO Box 518
620 Applegate St.
Philomath, OR 97370



(541) 929-5650
Fax (541) 929-5277
www.wetlabs.com

C-Star Calibration

Date	August 17, 2012	S/N#	CST-439DR	Pathlength	25 cm
<hr/>					
Analog output					
V _d	0.058 V				
V _{air}	4.751 V				
V _{ref}	4.652 V				
Temperature of calibration water				24.5 °C	
Ambient temperature during calibration				21.8 °C	

Relationship of transmittance (Tr) to beam attenuation coefficient (c), and pathlength (x , in meters): $Tr = e^{-cx}$

To determine beam transmittance: $Tr = (V_{sig} - V_{dark}) / (V_{ref} - V_{dark})$

To determine beam attenuation coefficient: $c = -1/x * \ln(Tr)$

V_d Meter output with the beam blocked. This is the offset.

V_{air} Meter output in air with a clear beam path.

V_{ref} Meter output with clean water in the path.

Temperature of calibration water: temperature of clean water used to obtain V_{ref} .

Ambient temperature: meter temperature in air during the calibration.

V_{sig} Measured signal output of meter.

Revision M

7/26/11

CTD Fish and Pressure Sensor

13



SEA-BIRD ELECTRONICS, INC.
 13431 NE 20th St, Bellevue Washington 98005 USA
 Phone: (425) 643-9866 Fax: (425) 643-9954 Email: seabird@seabird.com

Digiquartz Pressure Calibration dP/dT Corrected Coefficients*(Changed coefficients are posted in italics)*

Pressure Transducer Serial Number: 120089

Original Calibration Date: 2011-01-28

Date of Correction: 2012-12-11

Installed in: SBE 9Plus S/N 1130

PRESSURE COEFFICIENTS

C1	<i>-42307.76</i>	<i>psia</i>
C2	<i>1.4900785e-01</i>	<i>psia/deg C</i>
C3	<i>1.5073e-02</i>	<i>psia/deg C²</i>

D1 0.02473

D2 0.0

T1	<i>30.0225</i>	<i>usec</i>
T2	<i>-2.774198e-04</i>	<i>usec/deg C</i>
T3	<i>4.796e-06</i>	<i>usec/deg C²</i>
T4	<i>1.75442e-09</i>	<i>usec/deg C³</i>
T5	0e+00	

AD590M = 0.01281

A12590B = -3.819119

Slope = 1.0

Offset = 0.0

Corrected at Sea-Bird Electronics as per Paroscientific Calibration and Sea-Bird Electronics dP/dT tests.
 The original calibration from Paroscientific assumes an operating temperature range of 0 to 125 degrees C.
 dP/dT correction adjusts this operating range to a nominal range of 0 to 22 degrees C. This increases the
 accuracy of the transducer in this temperature range.

NOTE: Original coefficients from Paroscientific are attached to this form for informational purposes and
 should not be used.

CTD Conductivity (Primary)**Sea-Bird Electronics, Inc.**

13431 NE 20th Street, Bellevue, WA 98005-2010 USA

Phone: (+1) 425-643-9866 Fax (+1) 425-643-9954 Email: seabird@seabird.com

SENSOR SERIAL NUMBER: 1314
CALIBRATION DATE: 07-Feb-13SBE4 CONDUCTIVITY CALIBRATION DATA
PSS 1978: C(35,15,0) = 4.2914 Siemens/meter**GHIJ COEFFICIENTS**


$g = -4.04431481e+000$
 $h = 4.67610248e-001$
 $i = -8.18501726e-005$
 $j = 2.95382823e-005$
 $CP_{cor} = -9.5700e-008$ (nominal)
 $CT_{cor} = 3.2500e-006$ (nominal)

ABCDM COEFFICIENTS

$a = 1.90065991e-005$
 $b = 4.67333698e-001$
 $c = -4.04327951e+000$
 $d = -8.08114071e-005$
 $m = 4.1$
 $CP_{cor} = -9.5700e-008$ (nominal)

BATH TEMP (ITS-90)	BATH SAL (PSU)	BATH COND (Siemens/m)	INST FREQ (kHz)	INST COND (Siemens/m)	RESIDUAL (Siemens/m)
0.0000	0.0000	0.00000	2.94085	0.00000	0.00000
-0.9999	34.7256	2.79796	8.26366	2.79795	-0.00001
1.0001	34.7255	2.96895	8.48065	2.96897	0.00002
15.0001	34.7263	4.26175	9.96702	4.26172	-0.00003
18.5001	34.7261	4.60770	10.32795	4.60772	0.00002
29.0001	34.7238	5.68888	11.38059	5.68890	0.00002
32.5001	34.7153	6.06038	11.71987	6.06036	-0.00002

$$\text{Conductivity} = (g + hf^2 + if^3 + jf^4) / 10(1 + \delta t + \epsilon p) \text{ Siemens/meter}$$
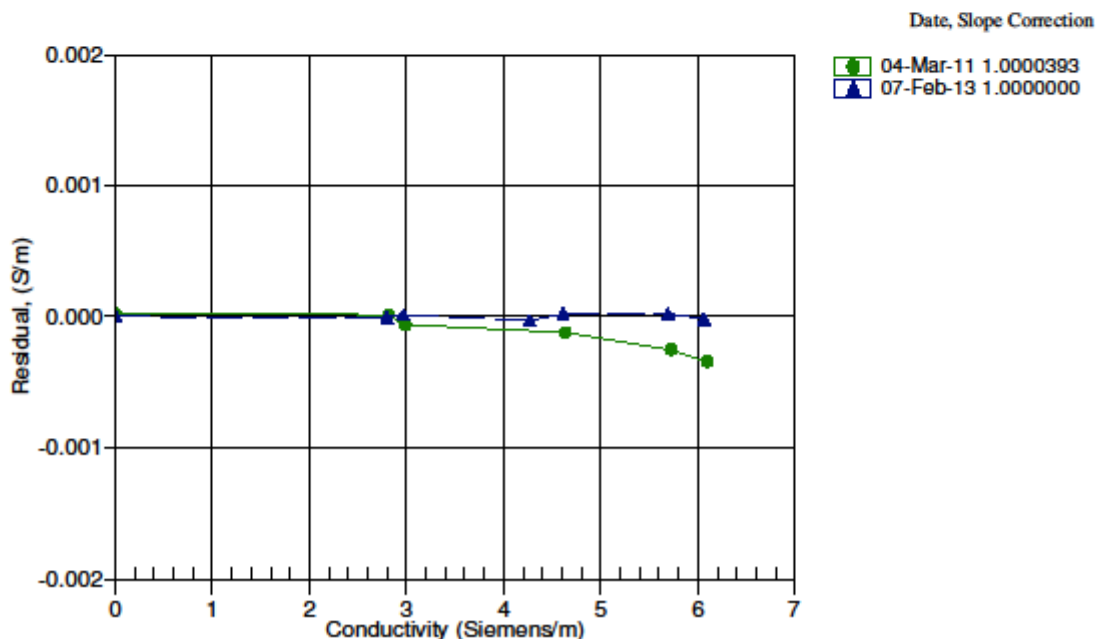
$$\text{Conductivity} = (af^m + bf^2 + c + dt) / [10(1 + \epsilon p)] \text{ Siemens/meter}$$
 $t = \text{temperature}[^{\circ}\text{C}]; p = \text{pressure}[\text{decibars}]; \delta = CT_{cor}; \epsilon = CP_{cor};$
 $\text{Residual} = (\text{instrument conductivity} - \text{bath conductivity}) \text{ using } g, h, i, j \text{ coefficients}$


CTD Conductivity (Secondary)

12

Sea-Bird Electronics, Inc.

13431 NE 20th Street, Bellevue, WA 98005 2010 USA

Phone: (+1) 425-643-9866 Fax (+1) 425-643-9954 Email: seabird@seabird.com

SENSOR SERIAL NUMBER: 4151
CALIBRATION DATE: 16-Nov-12SBF4 CONDUCTIVITY CALIBRATION DATA
PSS 1978: C(35.150) = 4.2914 Siemens/meter

GHJ COEFFICIENTS

$g = 1.02500273e-001$
 $h = 1.05228076e-000$
 $i = 7.49725164e-004$
 $j = 1.11911855e-004$
 $CP_{\text{prior}} = -8.5700e-008$ (nominal)
 $CT_{\text{cor}} = 3.2500e-006$ (nominal)

ABCDM COEFFICIENTS

$a = 8.82817771e-006$
 $b = 1.45951495e+000$
 $c = -1.02567806e+001$
 $d = -8.44165791e-005$
 $m = 4.9$
 $CP_{\text{prior}} = -9.5700e-008$ (nominal)

BATH TEMP (°C-90)	BATH SAL (PSU)	BATH COND (Siemens/m)	INST FREQ (kHz)	INST COND (Siemens/m)	RESIDUAL (Siemens/m)
0.0000	34.6000	0.03000	2.85770	0.03000	0.00000
-1.0001	34.8328	2.80980	5.13347	2.80583	-0.00002
0.9990	34.8303	2.87740	5.25121	2.87744	0.00002
14.9990	34.8496	4.27410	6.04150	4.27415	-0.00001
18.4999	34.8405	4.52122	6.28499	4.52124	0.00002
26.9999	34.8393	5.73564	6.80765	5.73562	-0.00002
32.5001	34.8303	6.07817	6.99320	6.07815	0.00001

$$\text{Conductivity} = (g + hf^2 + if^3 + jf^4) / (10(1 + \delta t + \epsilon p)) \text{ Siemens/meter}$$


$$\text{Conductivity} = (af^m + hf^2 + c + d) / (10(1 + \epsilon p)) \text{ Siemens/meter}$$

$$t = \text{temperature}[^{\circ}\text{C}]; p = \text{pressure[decibars]}; \delta = CT_{\text{cor}}; \epsilon = CP_{\text{cor}};$$

$$\text{Residual} = (\text{instrument conductivity} - \text{bath conductivity}) \text{ using } g, h, i, j \text{ coefficients}$$

Date, Slope Correction

16-Nov-12 1.0000000

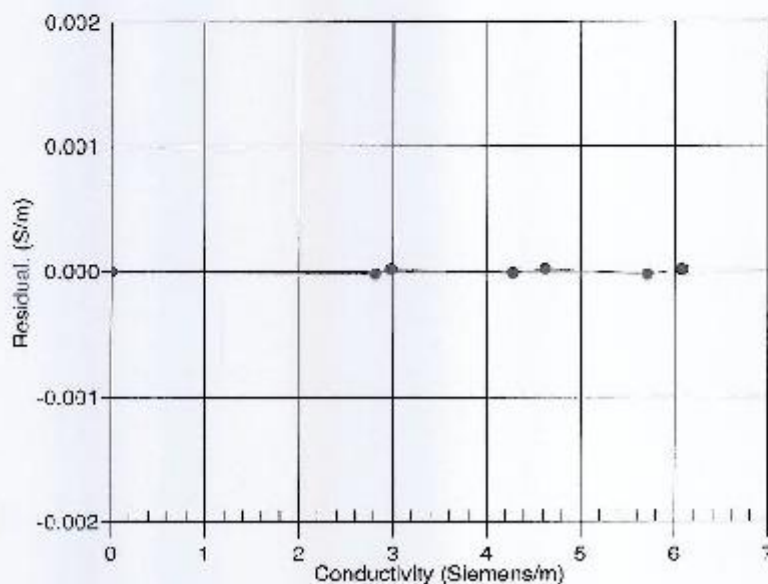

CTD Temperature (Primary)**Sea-Bird Electronics, Inc.**

13431 NE 20th Street, Bellevue, WA 98005-2010 USA

Phone: (+1) 425-643-9866 Fax (+1) 425-643-9954 Email: seabird@seabird.com

SENSOR SERIAL NUMBER: 1457
CALIBRATION DATE: 26-Jun-13SBE3 TEMPERATURE CALIBRATION DATA
ITS-90 TEMPERATURE SCALE

ITS-90 COEFFICIENTS

$g = 4.82815642\text{e-}003$
 $h = 6.70200965\text{e-}004$
 $i = 2.50968401\text{e-}005$
 $j = 1.95785766\text{e-}006$
 $f_0 = 1000.0$

IPTS-68 COEFFICIENTS


$a = 3.68121307\text{e-}003$
 $b = 5.98521054\text{e-}004$
 $c = 1.44484418\text{e-}005$
 $d = 1.95923780\text{e-}006$
 $f_0 = 6156.510$

BATH TEMP (ITS-90)	INSTRUMENT FREQ (Hz)	INST TEMP (ITS-90)	RESIDUAL (ITS-90)
-1.5001	6156.510	-1.5001	0.00004
1.0000	6512.258	0.9999	-0.00005
4.5000	7034.846	4.5000	-0.00003
7.9999	7586.773	7.9999	0.00002
11.5000	8168.851	11.5000	0.00003
15.0000	8781.785	15.0000	-0.00000
18.5000	9426.339	18.5000	0.00001
22.0000	10103.207	22.0000	0.00002
25.5000	10813.057	25.5000	-0.00005
29.0000	11556.574	29.0000	-0.00002
32.5000	12334.369	32.5000	0.00003

$$\text{Temperature ITS-90} = 1/[g + h[\ln(f_0/f)] + i[\ln^2(f_0/f)] + j[\ln^3(f_0/f)]] - 273.15 \text{ (}^\circ\text{C)}$$

$$\text{Temperature IPTS-68} = 1/[a + b[\ln(f_0/f)] + c[\ln^2(f_0/f)] + d[\ln^3(f_0/f)]] - 273.15 \text{ (}^\circ\text{C)}$$
Following the recommendation of JPOTS: T_{90} is assumed to be $1.00024 * T_{96}$ (-2 to 35 $^\circ\text{C}$)

Residual = instrument temperature - bath temperature

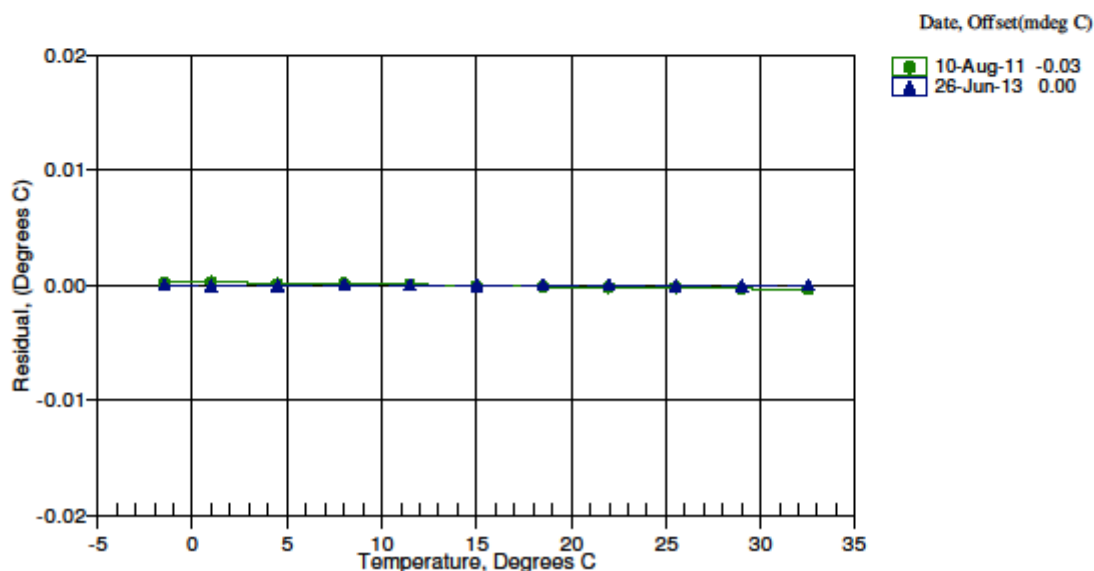

CTD Temperature (Secondary)**Sea-Bird Electronics, Inc.**

13431 NE 20th Street, Bellevue, WA 98005-2010 USA

Phone: (+1) 425-643-9866 Fax (+1) 425-643-9954 Email: seabird@seabird.com

SENSOR SERIAL NUMBER: 2470
CALIBRATION DATE: 07-Feb-12SBE3 TEMPERATURE CALIBRATION DATA
ITS-90 TEMPERATURE SCALE

ITS-90 COEFFICIENTS

$g = 4.31691039\text{e-}003$
 $h = 6.54891320\text{e-}004$
 $i = 2.44996941\text{e-}005$
 $j = 2.32173564\text{e-}006$
 $f_0 = 1000.0$

IPTS-68 COEFFICIENTS


$a = 3.68121169\text{e-}003$
 $b = 6.12834827\text{e-}004$
 $c = 1.75292431\text{e-}005$
 $d = 2.32343107\text{e-}006$
 $f_0 = 2731.579$

BATH TEMP (ITS-90)	INSTRUMENT FREQ (Hz)	INST TEMP (ITS-90)	RESIDUAL (ITS-90)
-1.5000	2731.579	-1.5000	0.00005
1.0000	2885.660	1.0000	-0.00004
4.5000	3111.776	4.5000	-0.00005
8.0000	3350.321	8.0000	-0.00003
11.5000	3601.620	11.5001	0.00005
15.0000	3865.982	15.0001	0.00015
18.5000	4143.682	18.4999	-0.00008
22.0000	4435.057	21.9999	-0.00006
25.5000	4740.367	25.4999	-0.00005
29.0063	5060.482	29.0064	0.00008
32.5000	5393.864	32.5000	-0.00001

$$\text{Temperature ITS-90} = 1/[g + h[\ln(f_0/f)] + i[\ln^2(f_0/f)] + j[\ln^3(f_0/f)]] - 273.15 \text{ (}^\circ\text{C)}$$

$$\text{Temperature IPTS-68} = 1/[a + b[\ln(f_0/f)] + c[\ln^2(f_0/f)] + d[\ln^3(f_0/f)]] - 273.15 \text{ (}^\circ\text{C)}$$
Following the recommendation of JPOTS: T_{90} is assumed to be $1.00024 * T_{90}$ (-2 to 35 $^\circ\text{C}$)

Residual = instrument temperature - bath temperature

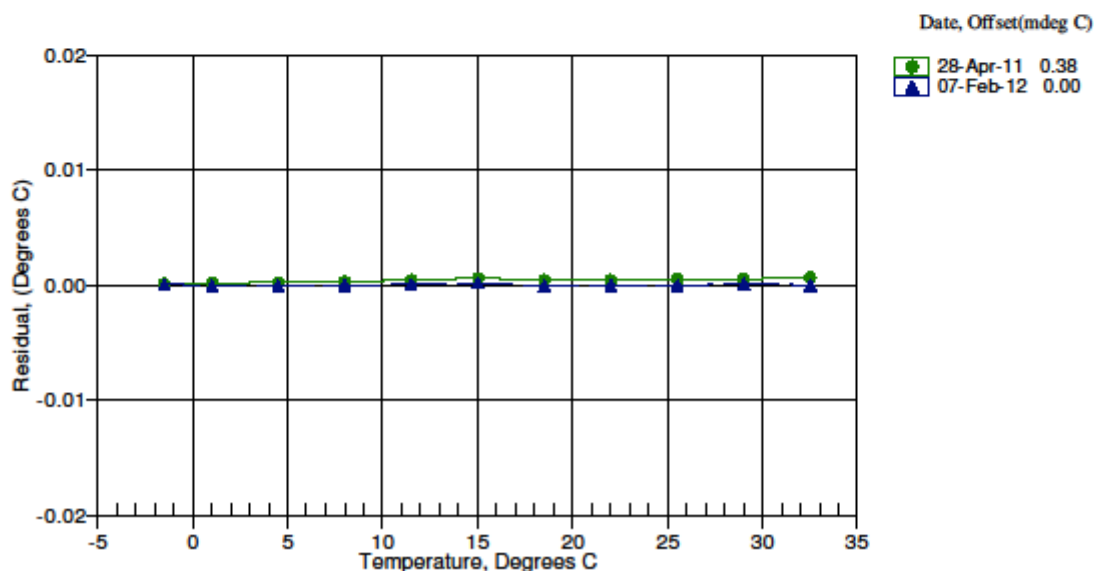

CTD Dissolved Oxygen Sensor (Primary, casts 1 & 45-final)**Sea-Bird Electronics, Inc.**

13431 NE 20th Street, Bellevue, WA 98005-2010 USA

Phone: (+1) 425-643-9866 Fax (+1) 425-643-9954 Email: seabird@seabird.com

SENSOR SERIAL NUMBER: 0080
CALIBRATION DATE: 13-Feb-13**SBE 43 OXYGEN CALIBRATION DATA****COEFFICIENTS**

Soc = 0.4885

Voffset = -0.5049

Tau20 = 1.79

A = -3.0719e-003

B = 1.5019e-004

C = -2.7921e-006

E nominal = 0.036

NOMINAL DYNAMIC COEFFICIENTS

D1 = 1.92634e-4 H1 = -3.30000e-2

D2 = -4.64803e-2 H2 = 5.00000e+3


H3 = 1.45000e+3

BATH OX (ml/l)	BATH TEMP ITS-90	BATH SAL PSU	INSTRUMENT OUTPUT (VOLTS)	INSTRUMENT OXYGEN (ml/l)	RESIDUAL (ml/l)
1.18	2.00	0.07	0.756	1.18	-0.00
1.19	6.00	0.07	0.788	1.19	-0.00
1.20	12.00	0.06	0.839	1.20	0.00
1.23	20.00	0.06	0.909	1.23	0.00
1.27	26.00	0.06	0.977	1.27	0.01
1.28	30.00	0.06	1.018	1.28	0.01
4.01	6.00	0.07	1.461	4.01	-0.00
4.04	12.00	0.06	1.626	4.04	-0.00
4.08	20.00	0.06	1.849	4.08	0.00
4.10	2.00	0.07	1.376	4.09	-0.01
4.11	26.00	0.06	2.028	4.11	0.00
4.14	30.00	0.06	2.162	4.14	0.00
6.82	30.00	0.06	3.231	6.81	-0.00
6.95	26.00	0.06	3.084	6.95	0.00
7.02	20.00	0.06	2.817	7.01	-0.01
7.17	12.00	0.06	2.493	7.17	0.00
7.33	6.00	0.07	2.251	7.33	0.00
7.43	2.00	0.07	2.087	7.43	0.00

$$\text{Oxygen (ml/l)} = \text{Soc} * (V + \text{Voffset}) * (1.0 + A * T + B * T^2 + C * T^3) * \text{OxSol}(T, S) * \exp(E * P / K)$$

V = voltage output from SBE43, T = temperature [deg C], S = salinity [PSU], K = temperature [Kelvin]

OxSol(T,S) = oxygen saturation [ml/l], P = pressure [dbar], Residual = instrument oxygen - bath oxygen

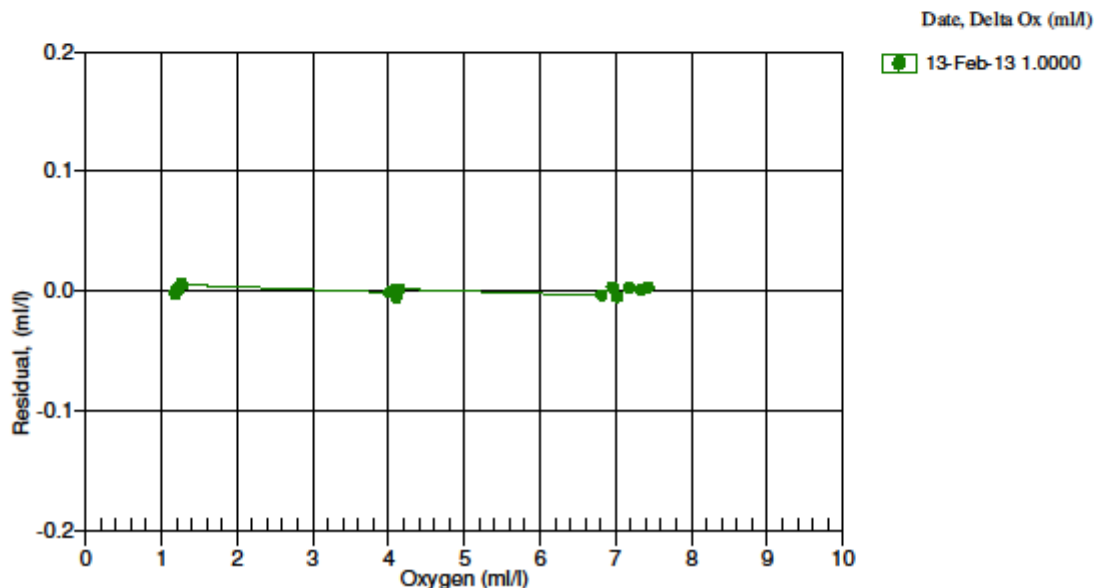

CTD Dissolved Oxygen Sensor (Primary, casts 2-44)

Sea-Bird Electronics, Inc.

13431 NE 20th Street, Bellevue, WA 98005-2010 USA

Phone: (+1) 425-643-9866 Fax (+1) 425-643-9954 Email: seabird@seabird.com

SENSOR SERIAL NUMBER: 2512
CALIBRATION DATE: 14-Dec-12

SBE 43 OXYGEN CALIBRATION DATA

COEFFICIENTS

Soc = 0.4798

Voffset = -0.4876

Tau20 = 2.11

A = 3.0195e-004

B = -3.8969e-005

C = 6.0000e-007

k nominal = 0.036

NOMINAL DYNAMIC COEFFICIENTS

D1 = 1.92634e-4 H1 = -3.30000e-2

D2 = -4.54803e-2 H2 = 5.00000e+3

D3 = 1.45900e+3

BATH OX (m/l)	BATH TEMP ITS 90	BATH SAL PSU	INSTRUMENT OUTPUT(VOLTS)	INSTRUMENT OXYGEN(m/l)	RESIDUAL (m/l)
1.20	2.00	0.00	0.716	1.20	0.00
1.22	6.00	0.00	0.780	1.22	0.00
1.23	12.00	0.00	0.830	1.23	0.00
1.25	20.00	0.00	0.952	1.25	0.00
1.25	20.00	0.00	0.900	1.25	0.00
1.25	30.00	0.00	0.991	1.27	0.02
0.15	2.00	0.00	1.370	4.10	-0.03
0.17	6.00	0.00	1.079	4.15	-0.03
0.20	12.00	0.00	1.643	4.10	-0.01
0.21	20.00	0.00	1.870	4.21	-0.01
0.22	26.00	0.00	2.047	4.22	0.00
0.24	30.00	0.00	2.173	4.25	0.00
7.02	30.00	0.00	3.271	7.12	-0.01
7.06	26.00	0.00	3.102	7.08	0.00
7.21	20.00	0.00	2.955	7.21	-0.00
7.32	12.00	0.00	2.911	7.34	0.01
7.43	6.00	0.00	2.269	7.14	0.01
7.57	2.00	0.00	2.120	7.50	0.02

$$\text{Oxygen (m/l)} = \text{Soc} * (V - \text{Voffset}) * (1.0 + A * T + B * T^2 + C * T^3) * \text{OxSol}(T, S) * \exp(E * P / K)$$

V = voltage output from SBE43, T = temperature [deg C], S = salinity [PSU], K = temperature [Kelvin]

OxSol(T,S) = oxygen saturation [m/l], P = pressure [dbar], Residual = instrument oxygen - bath oxygen

