


---

# LMG 1508

## Cruise Data Report

Scott Walker and Austin McHugh

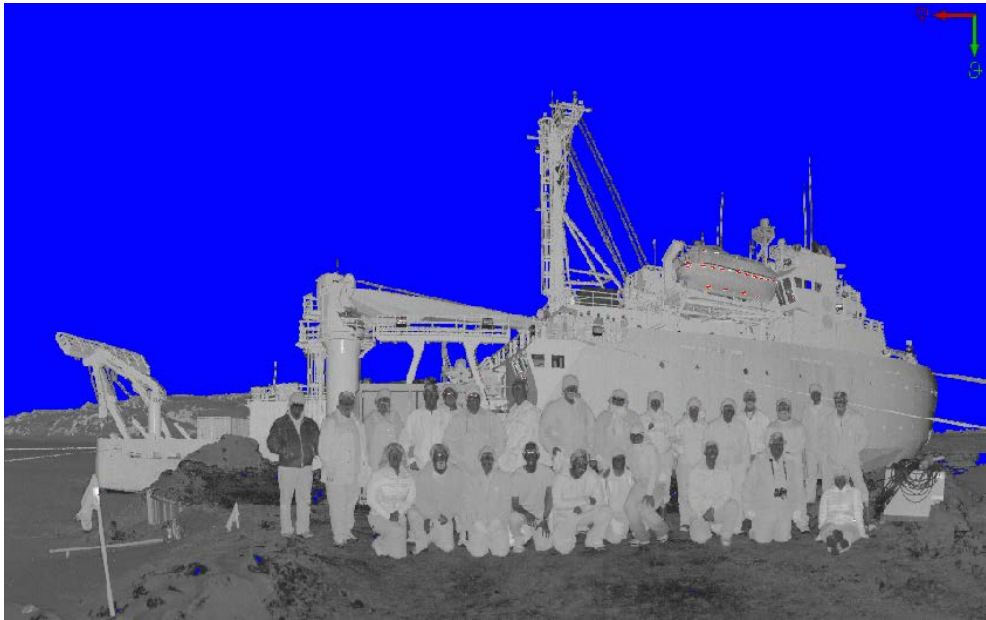

3D LiDAR Image of Summer Palmer Station crew by Elias Deeb, Adam Lewinter, CRREL

**2 - 17 October, 2015**

## Table of Contents

|   |    |
|---|----|
| INTRODUCTION.....   | 1  |
| ARCHIVE DATA EXTRACTION.....  | 2  |
| DISTRIBUTION CONTENTS.....  | 3  |
| ADCP.....   | 3  |
| CALIBRATION .....   | 3  |
| IMAGERY .....   | 3  |
| LOGSHEETS.....  | 3  |
| MAPS.....   | 3  |
| OCEAN (CTD, XBT AND XCTD) .....                                       | 3  |
| /Ocean/XBT .....  | 3  |
| /Ocean/XCTD .....   | 3  |
| /Ocean/CTD.....   | 4  |
| DATA AND SCIENCE REPORT.....  | 4  |
| SCIENCE .....   | 4  |
| WAYPOINTS.....  | 4  |
| QC PLOTS .....  | 4  |
| JGOFS DATA SET .....  | 5  |
| PCO2-MERGED DATA SET .....  | 6  |
| RVDAS .....   | 7  |
| <i>Meteorological Data</i> .....                                      | 7  |
| <i>Navigational Data</i> .....  | 7  |
| <i>Geophysical Data</i> .....   | 7  |
| <i>Oceanographic Data</i> .....                                       | 7  |
| DATA FILE NAMES AND STRUCTURES.....                                   | 8  |
| LKNV – KNUDSEN CHIRP 3260 SONAR .....                                 | 9  |
| LWN1 - WINCHES.....   | 9  |
| LMWX – CAMPBELL METEOROLOGICAL DAS .....                              | 9  |
| LSEA – WET WALL FLOWS, TRANSMISSOMETER .....                          | 11 |
| UTSG – MICROTSG, THERMOSALINOGRAPH.....                               | 12 |
| LRTM – DIGITAL REMOTE TEMPERATURE.....                                | 12 |
| LDL – FLUOROMETER, WETLAB ECO .....                                   | 12 |
| LGO2 – OXYGEN SYSTEM.....   | 13 |
| LOXY – OXYGEN (PART OF PCO2 SYSTEM, SEPARATE FROM OXYGEN SYSTEM)..... | 14 |
| LPCO – PCO2 SYSTEM.....   | 14 |
| LSVP - SOUND VELOCITY PROBE IN ADCP TRANSDUCER WELL .....             | 15 |
| LADC – ADCP SPEED LOG .....   | 15 |
| LGYR - GYRO.....  | 15 |
| LSEP – SEAPATH 330 GPS.....   | 16 |
| LGAR - GARMIN GPS.....  | 17 |

---

|   |           |
|---|-----------|
| LAIS – AIS RECEIVER .....                           | 19        |
| <b>LMG SENSORS.....</b>                             | <b>20</b> |
| SHIPBOARD SENSORS .....                             | 20        |
| UNDERWAY CALIBRATION SHEETS .....                   | 21        |
| <b>ACQUISITION AND PROCESSING INFORMATION .....</b> | <b>37</b> |
| PROCESSING SPECIFICS .....                          | 37        |
| SIGNIFICANT NOTES.....                              | 37        |
| ERRORS AND EVENTS .....                             | 37        |

## Introduction

The LMG data acquisition systems continuously log data from a suite of instrumentation throughout the cruise. This document describes the format of that data and its location on the distribution CDs, DVDs or Hard Drive. It also contains important information that may affect how this data is processed such as instrument failures or other known problems with acquisition.

All of the data has been archived with the Unix “tar” command and/or compressed using Unix “gzip” compression. Tar files have a “.tar” extension and Gzipped files have a “.gz” extension. Tools are available on all platforms for uncompressing and de-archiving these formats. On Macintosh, Stuffit Expander with DropStuff will open a tar archive and uncompress gzipped and Unix compressed files. For Windows, Winzip, a shareware utility included on this CD (remember, it is shareware) will open these files.

In some cases to adhere to the ISO9660 format the .tar extension was removed. When we tarred the files then gzip the tar archive the name of the file became *File.tgz*. This name does not follow the 8.3 naming convention of the ISO9660 format. On Windows and Mac Platforms Winzip and Stuffit Expander handles this just fine. When they expand the *File.gz* the expanded file becomes *File.tar*, which both software packages can handle. On Unix platforms gunzip expands *File.tgz* but it does not append the .tar extension. So you may not recognize the file as a tar archive, but OS does recognize it as a tar archive. If you use the file command it will return saying it is a tar file. The below tar command will un-archive the file just fine.

***IMPORTANT: Read the last section in this document, Acquisition Problems and Events, for important information that may affect the processing of this data.***

## Archive Data Extraction

It is often useful to know exactly how an archive was produced when expanding its contents. Tar files were created using the following commands:

```
tar cvf archive-file files-to-be-archived
```

To create a list of the files in the archive:

```
tar tvf archive-file > contents.list
```

To extract the files from the archive:

```
tar xvf archive-file file(s)-to-extract
```

G-zipped files will have a “.gz” extension on the filename. These files can be decompressed after de-archiving, using:

```
gunzip filename.gz
```

## Distribution Contents

### ADCP

/ADCP/

This directory contains a tar file of gentoo's proc directory, which contains a database of the averaged ping data, Matlab m-files used in processing the data, and daily graphs of the currents. For more information contact Teri Chereskin at [tchereskin@ucsd.edu](mailto:tchereskin@ucsd.edu).

### Calibration

/Cal/

Refer to the InstCoef.txt file along with the specific instrument calibration sheets in this report for information on how the RVDAS data was collected and processed.

### Imagery

/Imagery/

This directory contains things such as ice imagery, isobar charts, sat imagery, wave and wind images, and weather reports.

### Logsheets

/logsheet/

This directory contains scanned paper log sheets in PDF format for various science of opportunity or projects or cruise related science, including such things as XBT's, XCTD's, air sample log sheets, oxygen system maintenance logs, etc.

### Maps

/Maps/

This directory maps and mapping data generated by the ship's MCIS and automated scripts, usually in JPEG or PostScript format, plus any maps provided for this purpose by the on-board science party.

### Ocean (CTD, XBT and XCTD)

/Ocean/XBT

Contains a zip archive of XBT data generated for the Drake Transect by NOAA standard "AMVERSEAS" software. Non-Drake transect data may also be included, which will be a combination of binary and ascii files generated by standard Sippican MK-21 software.

/Ocean/XCTD

Expendable Conductivity, Temperature, and Depth (XCTD) digital probes were used to obtain water column temperature and Salinity profiles. The two files were created for each drop. .RDF files contain the raw data, and the .EDF contain the exported ascii data.

**/Ocean/CTD**

This directory contains the directory structure copied over from the CTD computer, and includes subdirectories for graphs, software configuration files, processing scripts, calibration files, raw data, and processed data.

**Data and Science Report**

/Report/

Copies of this report in MS Word and pdf formats.

**Science**

/Science/

This directory, if populated, contains data specified by the on-board science party.

**WAYPOINTS**

/waypoint/

Contains the waypoint file used for the cruise; this is read by the DAS system and the selected waypoint is displayed on the CCTV system.

**QC Plots**

/process/QC\_PLOTS/

Postscript files of data stored each day on RVDAS for quality control analysis during the cruise. There are 3 types of files, named metXXX.ps, navXXX.ps, and oceanXXX.ps, where XXX represents the Julian day. Met files are a summary of the data from the meteorological instruments, Nav files are a summary of navigational data, and Ocean files are a summary of the underway seawater and bathymetry data.

## JGOFS Data Set

/Process/JGOF/

The JGOFS data set consists of a single file produced each day named jg<julian\_day>.dat.gz where <julian\_day> is the day the data was acquired. The ".gz" extension indicates that the individual files are compressed before archiving. The daily file consists of 22 separate columnar fields in text format, which are described below. The JGOFS data set is obtained primarily by applying calibrations to raw data and decimating to whole minute intervals. However, several fields are derived measurements from more than a single raw input. *Note: Null, unused, or unknown fields are filled with 9's in the JGOFS data.*

Additionally, 3 separate QC plots are generated daily by the ET using the JGOFS data set. These plots include TSG and Bathymetry data, meteorological data, and navigation data. The files are called ocean<julian\_day>.ps, met<julian\_day>.ps, and nav<julian\_day>.ps respectively.

| Field | Data  | Units                                      |
|-------|---|--|
| 01    | GMT date  | dd/mm/yy                                   |
| 02    | GMT time  | hh:mm:ss                                   |
| 03    | PCOD latitude (negative is South)                     | Ddd.dddd                                   |
| 04    | PCOD longitude (negative is West)                     | Ddd.dddd                                   |
| 05    | Ships speed   | Knots                                      |
| 06    | GPS HDOP  | -  |
| 07    | Gyro Heading  | Degrees (azimuth)                          |
| 08    | Course over ground                                    | Degrees (azimuth)                          |
| 09    | Mast PAR  | $\mu\text{Einsteins/meters}^2 \text{ sec}$ |
| 10    | Sea surface temperature                               | $^{\circ}\text{C}$                         |
| 11    | Not used  | -  |
| 12    | Sea surface salinity                                  | PSU  |
| 13    | Sea depth (uncorrected, calc. sw sound vel. 1500 m/s) | meters                                     |
| 14    | True wind speed (port windbird)                       | meters/sec                                 |
| 15    | True wind direction (port windbird)                   | degrees (azimuth)                          |
| 16    | Ambient air temperature                               | $^{\circ}\text{C}$                         |
| 17    | Relative humidity                                     | %  |
| 18    | Barometric pressure                                   | mBars                                      |
| 19    | Sea surface fluorometry                               | $\mu\text{g/l}$                            |
| 20    | Transmissometer                                       | Volts (0-5)                                |
| 21    | PSP   | $\text{W/m}^2$                             |
| 22    | PIR   | $\text{W/m}^2$                             |



**pCO<sub>2</sub>-merged Data Set**

/Process/PCO2/

00+346:23:58:20.672 2000346.9991 2398.4 1008.4 0.01 45.4 350.3 342.6 15.77 Equil -43.6826  
 173.1997 15.51 33.90 0.33 5.28 9.05 1007.57 40.0 14.87 182.44 -1

| Field | Data  | Units                              |
|-------|---|------------------------------------|
| 1     | RVDAS time tag  |                                    |
| 2     | pCO <sub>2</sub> time tag (decimal is fractional time of day) | yyyyddd.ttt                        |
| 3     | Raw voltage (IR)  | mV                                 |
| 4     | Cell temperature  | °C                                 |
| 5     | Barometer   | MBar                               |
| 6     | Flow rate   | ml / min                           |
| 7     | Concentration   | ppm                                |
| 8     | pCO <sub>2</sub> pressure                                     | microAtm                           |
| 9     | Equilibrated temperature                                      | °C                                 |
| 10    | Sea Water Temp  | 1 or 2 digits                      |
| 11    | Valve position  | °C                                 |
| 12    | Flow source (Equil = pCO <sub>2</sub> measurement)            | text                               |
| 13    | RVDAS latitude  | degrees                            |
| 14    | RVDAS longitude   | degrees                            |
| 15    | TSG external temperature                                      | °C                                 |
| 16    | TSG 1 salinity  | PSU                                |
| 17    | Fluorometer   | V                                  |
| 18    | RVDAS true wind speed   | m/s                                |
| 19    | RVDAS true wind direction                                     | degrees                            |
| 20    | Barometric Pressure   | mBars                              |
| 21    | Uncontaminated seawater pump flow rate                        | l/min                              |
| 22    | Speed over ground   | knots                              |
| 23    | Course made good  | degrees                            |
| 24    | Oxygen  | μM                                 |
| 25    | TSG 2 internal temperature                                    | °C                                 |
| 26    | TSG 2 salinity  | PSU                                |
| 27    | TSG 1 internal temperature                                    | °C                                 |
| 28    | H2O Input Source  | -1 stern<br>thruster<br>0 moonpool |

**RVDAS**

/RVDAS/

RVDAS (Research Vessel Data Acquisition System) was developed at Lamont-Doherty Earth Observatory of Columbia University and has been used on the R/V Maurice Ewing for several years. It was adapted for use on the Nathaniel B. Palmer and her sister ship, the R/V Laurence M. Gould.

Below you will find detailed information on the data included. Be sure to read the "Significant Acquisition Events" section below for important information about data acquisition during this cruise.

*Meteorological Data*

| Measurement                                      | File ID | Collect. Status | Rate  | Instrument            |
|--|---------|-----------------|-------|-----------------------|
| Air Temperature                                  | lmwx    | continuous      | 1 sec | R. M. young 41372VC   |
| Relative Humidity                                | lmwx    | continuous      | 1 sec | R. M. young 41372VC   |
| Wind Speed/Direction                             | lmwx    | continuous      | 1 sec | Gill Ultrasonic       |
| PAR,<br>(Photosynthetically-Available Radiation) | lmwx    | continuous      | 1 sec | BSI QSR-240           |
| Barometer  | lmwx    | continuous      | 1 sec | R. M. young 61201     |
| Port Ultrasonic Wind Speed/Direction             | lmwx    | continuous      | 1 sec | Gill Wind Observer II |
| PIR (LW radiation)                               | lmwx    | continuous      | 1 sec | Eppley PIR            |
| PSP (SW radiation)                               | lmwx    | continuous      | 1 sec | Eppley PSP            |
| Oxygen   | lgo2    | continuous      | 1 min | UCAR Oxygen system    |

*Navigational Data*

| Measurement | File ID | Collect. Status | Rate    | Instrument              |
|-------------|---------|-----------------|---------|-------------------------|
| Gyro        | lgyr    | continuous      | 0.2 sec | Meridian Bridgmate Gyro |
| Garmin GPS  | lgar    | continuous      | 1 sec   | Garmin 17               |
| Seapath GPS | lsep    | Continuous      | 1 sec   | Seapath 330             |

*Geophysical Data*

| Measurement   | File ID | Collect. Status | Rate   | Instrument         |
|---------------|---------|-----------------|--------|--------------------|
| Bathymetry    | lknu    | variable        | Varies | Knudsen Chirp 3260 |
| DUSH 11 Winch | lwn1    | variable        | varies | Markey DUSH 11     |
| DUSH 5 Winch  | lwn1    | variable        | varies | Markey DUSH 5      |
| DUSH 4 Winch  | lwn1    | variable        | varies | Markey DUSH 4      |
| COM10 Winch   | lwn1    | variable        | varies | Markey COM10       |

*Oceanographic Data*

| Measurement             | File ID | Collect. Status | Rate    | Instrument     |
|-------------------------|---------|-----------------|---------|----------------|
| Salinity                | utsg    | continuous      | 3 sec   | SeaBird 45     |
| Salinity                | tsg2    | continuous      | 3 sec   | SeaBird 45     |
| Sea Surface Temperature | lrtm    | continuous      | 1 sec   | SeaBird 38     |
| Fluorometry (digital)   | ldfl    | continuous      | 1 sec   | Wetlab ECO     |
| ADCP, Speed Log         | ladc    | continuous      | 1 sec   | RD Instruments |
| Oxygen                  | loxy    | continuous      | 1 sec   |                |
| PCO2                    | lpcO2   | continuous      | 2.5 min |                |

## Data File Names and Structures

RVDAS data is divided into two broad categories, **Underway** and **Navigation**. The groups are abbreviated “uw” and “nav”. Thus, these two tar files, lmguw.tar and lmgnav.tar exist under the top-level rvdas directory. The instruments are broken down as shown. Each data file is g-zipped to save space on the distribution. Not all data types are collected every day or on every cruise.

RVDAS data files are named following the convention: LMG[FileID].dDDD.

- The FileID is a 4-character code representing the system being logged, for example: lmet (for meteorology)
- DDD is the Julian day of the data collection

| Underway Data              | File ID | Navigation Data | File ID |
|----------------------------|---------|-----------------|---------|
| Meteorological - Cambell   | lmwx    | Gyro Compass    | lgyr    |
| Knudsen                    | lknu    | Garmin 17 GPS   | lgar    |
| microTSG                   | utsg    | Seapath 330 GPS | lsep    |
| Digital Remote Temperature | lrtm    | AIS             | lais    |
| Fluorometer – Wetlab ECO   | ldfl    |                 |         |
| ADCP                       | ladc    |                 |         |
| Sound Velocity Probe       | lsvp    |                 |         |
| GUV & PUV                  | lguv    |                 |         |
| PCO2 System                | lpco    |                 |         |
| Oxygen                     | loxy    |                 |         |
| Wet Wall Flows             | lsea    |                 |         |
| Winches: Dush4,5,&11       | lwn1    |                 |         |
| Net Depth Sensor           | lnds    |                 |         |

Data is received by the RVDAS system via RS-232 serial connections. The data files that comprise the rvdas data set are described below. A time tag is added to each line of data received and the data is written to disk.

YY+DDD:HH:MM:SS.SSS [data stream from instrument]

Where, YY: two-digit year, DDD: Julian Day, HH: 2 digit hours, MM: 2 digit minutes SS.SSS: seconds. All times are UTC.

The delimiters used to separate fields in the raw data files are usually spaces and commas, but other delimiters are used (::, =, @) and occasionally there is no delimiter. Care should be taken when reprocessing the data that the field separations are clearly understood. An example data

**Iknu – Knudsen Chirp 3260 Sonar**

14+002:19:07:04.648 3.5kHz,4000.92,1,12.0kHz,4001.12,1,1500,-57.343073,-63.750720

| Field | Data                            | Units       |
|-------|---------------------------------|-------------|
| 1     | RVDAS Time Tag                  |             |
| 2     | 3.5kHz – low frequency header   |             |
| 3     | LF - depth to surface           | meters      |
| 4     | LF – Depth Valid Flag           |             |
| 5     | 12.0kHz – high frequency header |             |
| 6     | HF - depth to surface           | meters      |
| 7     | HF – Depth Valid Flag           |             |
| 8     | Sound speed velocity            | m/s         |
| 9     | Latitude                        | Dec degrees |
| 10    | Longitude                       | Dec degrees |

**Iwn1 - Winches**

08+033:11:27:50.673 RD,DUSH-5,00111.63,00000000,-0000012,1938

| Field | Data  | Units         |
|-------|---|---------------|
| 1     | RVDAS Time Tag                                  |               |
| 2     | Record Identifier, RD=Remote Data               |               |
| 3     | Winch Identifier, DUSH-X where X is 4, 5, or 11 |               |
| 4     | Tension   | lbs           |
| 5     | Speed   | Meters/minute |
| 6     | Payout  | meters        |
| 7     | Checksum  |               |

**Imwx – Campbell Meteorological DAS**

08+034:13:52:14.216 PUS,A,356,002.15,M,+332.28,+000.97,60,08

| Field | Data  | Units |
|-------|---|-------|
| 1     | RVDAS Time Tag  |       |
| 2     | PUS tag – Port UltraSonic Anemometer                            |       |
| 3     | Unit Identification, A-Z  |       |
| 4     | Port Wind Direction, degrees relative to Bow                    | deg   |
| 5     | Port Wind Speed   | m/s   |
| 6     | Units, M=meters per second                                      |       |
| 7     | Sound Speed   | m/s   |
| 8     | Sonic Temperature   | °C    |
| 9     | Status, 0=ok, 60=Heating Enabled & ok, Other value mean a fault |       |
| 10    | Check Sum   |       |

08+034:13:52:14.216 SUS,A,356,002.15,M,+332.28,+000.97,60,08

| Field | Data  | Units |
|-------|---|-------|
| 1     | RVDAS Time Tag  |       |
| 2     | SUS tag – Starboard UltraSonic Anemometer                       |       |
| 3     | Unit Identification, A-Z  |       |
| 4     | Port Wind Direction, degrees relative to Bow                    | deg   |
| 5     | Port Wind Speed   | m/s   |
| 6     | Units, M=meters per second                                      |       |
| 7     | Sound Speed   | m/s   |
| 8     | Sonic Temperature   | °C    |
| 9     | Status, 0=ok, 60=Heating Enabled & ok, Other value mean a fault |       |
| 10    | Check Sum   |       |

08+034:13:52:14.454 MET,12.22322,44.25706,-75,-25,-363.6365,2.332982,-0.08215196,278.6845,  
279.2192,854.6198

| Field | Data                        | Units  |
|-------|-----------------------------|--------|
| 1     | RVDAS Time Tag              |        |
| 2     | MET tag                     |        |
| 3     | Power Supply Voltage        | Volts  |
| 4     | Enclosure Relative Humidity | %      |
| 5     | Air Temp                    | °C     |
| 6     | Air Relative Humidity       | %      |
| 7     | PAR                         | mVolts |
| 8     | PSP Thermopile              | mVolts |
| 9     | PIR Thermopile              | mVolts |
| 10    | PIR Case Temperature        | °K     |
| 11    | PIR Dome Temperature        | °K     |
| 12    | Barometer                   | mBars  |

**Isea – wet wall flows, transmissometer**

12+004:12:01:04.438 WetLab\_1,14.1,XMISS,3.098,V,0.000,0.000,0.000,-928.535,-  
 220.566,0.000,0.000,T,NAN,NAN,NAN,NAN,P,0,0,F,47.91811,0,6.815308,0,0,0,0,0,I,1,1,1,1

| Field | Data                   | Units  |
|-------|------------------------|--------|
| 01    | RVDAS Time Tag         |        |
| 02    | WetLab_1               | Text   |
| 03    | Internal Temperature   | °C     |
| 04    | XMISS                  | Text   |
| 05    | Transmissometer        | V      |
| 06    | V                      | Text   |
| 07    | Double Ended Voltage 1 | V      |
| 08    | Double Ended Voltage 2 | V      |
| 09    | Double Ended Voltage 3 | V      |
| 10    | Voltage 1              | V      |
| 11    | Voltage 2              | V      |
| 12    | Voltage 3              | V      |
| 13    | Voltage 4              | V      |
| 14    | T                      | Text   |
| 15    | Temperature 1          | °C     |
| 16    | Temperature 2          | °C     |
| 17    | Temperature 3          | °C     |
| 18    | Temperature 4          | °C     |
| 19    | P                      | Text   |
| 20    | Pulse Counter 1        | Number |
| 21    | Pulse Counter 2        | Number |
| 22    | F                      | Text   |
| 23    | Flow Counter 1         | Number |
| 24    | Flow Counter 2         | Number |
| 25    | Flow Counter 3         | Number |
| 26    | Flow Counter 4         | Number |
| 27    | Flow Counter 5         | Number |
| 28    | Flow Counter 6         | Number |
| 29    | Flow Counter 7         | Number |
| 30    | Flow Counter 8         | Number |
| 31    | I                      | Text   |
| 32    | Digital Input 1        | Number |
| 33    | Digital Input 2        | Number |
| 34    | Digital Input 3        | Number |
| 35    | Digital Input 4        | Number |

**utsg – microTSG, Thermosalinograph**

For further information on this data, check [www.seabird.com](http://www.seabird.com) for SBE 45 MicroTSG Thermosalinograph

08+037:13:45:57.596 2.6470, 3.03853, 33.8129, 1459.351

| Field | Data                       | Units |
|-------|----------------------------|-------|
| 1     | RVDAS Time Tag             |       |
| 2     | Internal water temperature | °C    |
| 3     | Conductivity               | S/m   |
| 4     | Salinity                   | psu   |
| 5     | Sound Velocity             | m/s   |

**Irtm – digital Remote Temperature**

For further information on this data, check on [www.seabird.com](http://www.seabird.com) on SBE38 Digital Thermometer

08+037:13:47:17.841 2.2527

| Field | Data                       | Units |
|-------|----------------------------|-------|
| 1     | RVDAS Time Tag             |       |
| 2     | External water temperature | °C    |

**Idfl – Fluorometer, Wetlab ECO**

08+037:13:55:08.434 99/99/99 99:99:99 0.00 2585 73 543

| Field | Data                        | Units    |
|-------|-----------------------------|----------|
| 1     | RVDAS Time Tag              |          |
| 2     | Fluorometer Date            | mm/dd/yy |
| 3     | Fluorometer Time            | hh:mm:ss |
| 4     | Chlorophyll Signal          | µg/l     |
| 5     | Reference                   | λq       |
| 6     | Counts – Chlorophyll Signal | Count    |
| 7     | Thermistor                  |          |

## Igo2 – Oxygen System

For further information on this data, please contact Britt Stephens at [stephens@ucar.edu](mailto:stephens@ucar.edu)

```
12+301:22:35:30.558 81300.8 16.0 32.0 000.0 005.0 1.2589631 1.2379622 744.549 111.853 131.642 -
2.089 -2.448 723.594 002.50 086.43 099.74 002.77 000.97 050.65 0.000 001.19 065.59 039.48
1966.097 01.345 37.0171 37.8433 000.0 000.0 20.66 20.41 -92.0 28.66 37.44 42.33 37.80 47.95 0.0
01.88 0.0001711 0.0001712 0.0000747 0.0000725 02.657 02.678 -1 0.0000895 -043.94
```

| Field | Data  | Units |
|-------|---|-------|
| 1     | RVDAS Time Tag  |       |
| 2     | jsecoday - Seconds since midnight                                       |       |
| 3     | jselflag - 8 bit decimal value indicated selected gases                 |       |
| 4     | jprgflag - 8 bit decimal value indicated purged gases                   |       |
| 5     | jmfcflag - 8 bit decimal value indicated mass-flow controller states    |       |
| 6     | jgenflag - 8 bit decimal value indicated other parameters               |       |
| 7     | jfcv1 - voltage on Fuel Cell #1   |       |
| 8     | jfcv2 - voltage on Fuel Cell #2   |       |
| 9     | jpfccl - pressure in torr at fuel cells                                 |       |
| 10    | jlico2a - CO2 in ppm in Li7000 Cell A                                   |       |
| 11    | jlico2b - CO2 in ppm in Li7000 Cell B [CO2 MEASUREMENT]                 |       |
| 12    | jlih2oa - H2O in ppt in Li7000 Cell A                                   |       |
| 13    | jlih2ob - H2O in ppt in Li7000 Cell B                                   |       |
| 14    | jlipb - pressure in torr at Li7000 Cell B                               |       |
| 15    | flmfcset - mass-flow controller set voltage                             |       |
| 16    | jfl1 - flow in sccm on Inlet Line #1                                    |       |
| 17    | jfl2 - flow in sccm on Inlet Line #2                                    |       |
| 18    | jfl1t - flow in sccm on Long-Term reference cylinder                    |       |
| 19    | jflcal - flow in sccm on selected Calibration cylinder                  |       |
| 20    | jflwta - flow in sccm on selected Working Tank Cylinder                 |       |
| 21    | jvsoset - purge line voltage-sensitive orifice set voltage              |       |
| 22    | jflpurge - flow in sccm on purge line                                   |       |
| 23    | jflwtb - flow in sccm on Working Tank line through sensors              |       |
| 24    | jflsp - flow in sccm on Span line through sensors                       |       |
| 25    | jpfridge - pressure in torr inside fridge trap                          |       |
| 26    | jtfridge - temperature in C inside fridge trap                          |       |
| 27    | jtmpt - fuel-cell control temperature (thermistor) in C for MPT10000    |       |
| 28    | jtfccl - fuel-cell thermistor temperature in C                          |       |
| 29    | jtach1 - rmp of fan inside Line #1 Inlet                                |       |
| 30    | jtach2 - rmp of fan inside Line #2 Inlet                                |       |
| 31    | jt cyl1 - temperature in C from cylinder box RTD #1                     |       |
| 32    | jt cyl2 - temperature in C from cylinder box RTD #2                     |       |
| 33    | jtchill - temperature in C from chiller RTD                             |       |
| 34    | jtamb - temperature in C RTD near Analyzer Box electronics              |       |
| 35    | jtomega - Analyzer Box control temperature (RTD) for Omega CNi2332      |       |
| 36    | jt u4ch - temperature in C inside USB4CH 24-bit A/D box                 |       |
| 37    | jtfcrt - fuel-cell RTD temperature in C                                 |       |
| 38    | jtirga - temperature in C inside Li7000                                 |       |
| 39    | jliflags - Li7000 status flag   |       |
| 40    | jlihrsrc - Li7000 source/detector relative humidity                     |       |
| 41    | jsdfcv1 - standard deviation of 1-Hz Fuel Cell #1 voltage               |       |
| 42    | jsdfcv2 - standard deviation of 1-Hz Fuel Cell #2 voltage               |       |
| 43    | jslfcv1 - slope of 1-Hz Fuel Cell #1 voltage                            |       |
| 44    | jslfcv2 - slope of 1-Hz Fuel Cell #2 voltage                            |       |
| 45    | jsdco2a - standard deviation of 1-Hz Li7000 Cell A CO2 in ppm           |       |
| 46    | jsdco2b - standard deviation of 1-Hz Li7000 Cell B CO2 in ppm           |       |
| 47    | posneg - flag indicating position of fuel-cell changeover valve         |       |
| 48    | jogdeltadiff - amplitude of 3-jog O2 difference-signal [O2 MEASUREMENT] |       |



**loxy – Oxygen (Part of PCO2 system, separate from Oxygen System)**

For further information on this data, contact Tim Newberger at [tim.newberger@noaa.gov](mailto:tim.newberger@noaa.gov)

```
04+117:23:57:23.504 MEASUREMENT      3830      380 Oxygen:      309.95      Saturation:
83.48 Temperature:      -1.35      DPhase:      33.41      BPhase:      32.22
      RPhase:      0.00      BAmp:      262.09      BPot:      163.00      RAmp:
0.00 RawTem.:      694.92
```

| Field | Data  | Units        |
|-------|---|--------------|
| 1     | RVDAS Time Tag                              |              |
| 2-4   | Measurement ID, Model Number, Serial Number | alphanumeric |
| 5     | Oxygen heading                              | text         |
| 6     | Oxygen Reading                              | Raw numeric  |
| 7     | Saturation heading                          | text         |
| 8     | Saturation Reading                          | Raw numeric  |
| 9     | Temperature heading                         | text         |
| 10    | Water Temperature                           | °C           |
| 11    | Dphase heading                              | text         |
| 12    | Dphase                                      | Raw numeric  |
| 13    | Bphase heading                              | text         |
| 14    | BPhase                                      | Raw numeric  |
| 15    | Rphase heading                              | text         |
| 16    | Rphase                                      | Raw numeric  |
| 17    | Bamp heading                                | text         |
| 18    | Bamp  | Raw numeric  |
| 19    | Bpot heading                                | text         |
| 20    | Bpot  | Raw numeric  |
| 21    | Ramp heading                                | text         |
| 22    | Ramp  | Raw numeric  |
| 23    | RawTem heading                              | text         |
| 24    | RawTemp                                     | Raw numeric  |

**Ipco – PCO2 system**

For further information on this data, contact Tim Newberger at [tim.newberger@noaa.gov](mailto:tim.newberger@noaa.gov)

```
02+319:23:59:13.748 2002319.99851      7154.27      26.49      1033.6      325.79      6.74      329.3
53.76      0      Equil
```

| Field | Data                                 | Units     |
|-------|--------------------------------------|-----------|
| 1     | RVDAS Time Tag                       |           |
| 2     | Julian date file string              | Julian    |
| 3     | IR voltage reading                   | mV        |
| 4     | Cell temperature                     | °C        |
| 5     | Barometer                            | millibars |
| 6     | Gas flow                             | mL/min    |
| 7     | VCO2 dry value                       | PPM       |
| 8     | PCO2 wet/Delta value                 | PPM       |
| 9     | Equilibrator Temperature from RTD    | °C        |
| 10    | Equilibrator Temperature from SBE-38 | °C        |
| 11    | Solenoid position ID                 | number    |
| 12    | Measured gas                         | name      |

## Isvp - Sound Velocity Probe in ADCP Transducer Well

NOTE: This value does not represent or reflect the sound speed in the ocean, and is for internal use by the ADCP.

00+348:01:59:52.128 177204

| Field | Data            | Units |
|-------|-----------------|-------|
| 1     | RVDAS Time Tag  |       |
| 2     | Raw data counts | N /A  |

## Iadc – ADCP Speed Log

00+019:23:59:59.099 \$PUHAW,UVH,-1.48,-0.51,250.6

| Field | Data   | Units   |
|-------|--|---------|
| 1     | RVDAS Time Tag   |         |
| 2     | \$PUHAW  |         |
| 3     | UVH (E-W, N-S, Heading)  |         |
| 4     | Ship Speed relative to reference layer <sup>1</sup> velocity <sup>2</sup> , East vector  | knots   |
| 5     | Ship Speed relative to reference layer <sup>1</sup> velocity <sup>2</sup> , North vector | knots   |
| 6     | Ship heading   | degrees |

<sup>1</sup>The reference layer is an average velocity measured in a number of depth “bins”. On the LMG, the bins are typically eight meters deep and bins 3-10 define the reference layer. Hence, the reference layer is the water column from 16-80 meters beneath the ship.

<sup>2</sup>The speed output is water velocity relative to the ship’s hull and is therefore opposite of the actual movement of the ship. For example, if the ship’s heading is due north, the North/South reference layer velocity is likely to be negative (southerly).

## Igyr - Gyro

02+315:23:59:58.616 \$HEHDT,287.7,T\*25

### HDT: True Heading

01+083:00:00:02.893 \$HEHDT,246.3,T\*2C

| Field | Data                              | Units   |
|-------|-----------------------------------|---------|
| 1     | RVDAS Time Tag \$HEHDT            |         |
| 2     | Heading XXXXX = ddd.d             | degrees |
| 3     | T flag for true heading, checksum |         |

**Isep – Seapath 330 GPS****INZDA: Time and Date Data**

10+351:23:59:58.142 \$INZDA,235958.08,17,12,2010,,\*78

| Field | Data           | Units       |
|-------|----------------|-------------|
| 1     | RVDAS Time Tag |             |
| 2     | \$INZDA Tag    |             |
| 3     | time           | hhmmss.ss   |
| 3     | day            | dd          |
| 4     | month          | mm          |
| 5     | year           | yyyy        |
| 6     | (blank)        |             |
| 7     | Check sum      | hexadecimal |

**INGGA: Global Positioning Fix Data**

10+351:23:59:58.142 \$INGGA,235958.07,6118.168460,S,06008.089527,W,1,12,0.7,22.57,M,17.79,M,,\*46

| Field | Data   | Units       |
|-------|--|-------------|
| 1     | RVDAS Time Tag   |             |
| 2     | \$INGGA Tag  |             |
| 3     | Time (UTC)   | hhmmss.ss   |
| 3     | Latitude in degrees with decimal minutes   | ddmm.mmm    |
| 4     | {N S} (latitude is north or south)   |             |
| 5     | Longitude in degrees with decimal minutes  | ddmm.mmm    |
| 6     | {E W} (longitude is east of west)  |             |
| 7     | GPS quality indicator: 0 = invalid position, 1 = GPS SPS used, 2 = DGPS used, 3 = GPS PPS used, 4 = GPS RTK used, 5 = GPS float RTK used, 6 = dead reckoning |             |
| 8     | Number of Satellites in use (00-99)  |             |
| 9     | HDOP   |             |
| 10    | Height above ellipsoid in meters   | m.mm        |
| 11    | M  |             |
| 12    | Age of DGPS corrections in seconds   | ss.ss       |
| 13    | M  |             |
| 14    | (blank)  |             |
| 15    | *Check sum   | hexadecimal |

**INRMC: Recommended Minimum Specific GNSS Data**

10+351:23:59:58.200 \$INRMC,235958.07,A,6118.168460,S,06008.089527,W,12.8,331.22,171210,11.3,E,A\*1C

| Field | Data   | Units     |
|-------|--|-----------|
| 1     | RVDAS Time Tag   |           |
| 2     | \$INRMC Tag  |           |
| 3     | UTC of position  | hhmmss.ss |
| 4     | Status A = Data Valid, V = Navigation Receiver Warning |           |
| 5     | Latitude in degrees with decimal minutes               | ddmm.mmm  |
| 6     | North (N) or South (S)                                 |           |
| 7     | Longitude in degrees with decimal minutes              | ddmm.mmm  |
| 8     | East (E) or West (W)                                   |           |
| 9     | Speed Over Ground, knots                               | knots     |
| 10    | Course Over Ground, degrees True                       | degrees   |
| 11    | Date   | ddmmyy    |
| 12    | Magnetic Variation, degrees E/W                        | degrees   |
| 13    | Mode Indicator E= Estimated Mode                       |           |
| 14    | *Check sum   |           |

**INVTG: Speed Over Ground, Course Over Ground**

14+025:23:59:59.100 \$INVTG,32.69,T,,M,10.6,N,19.6,K,A\*1A

| Field | Data                             | Units |
|-------|----------------------------------|-------|
| 1     | RVDAS Time Tag                   |       |
| 2     | \$INVTG Tag                      |       |
| 3     | Course over ground, degrees true | d.dd  |
| 4     | T                                |       |
| 5     | ,                                |       |
| 6     | M                                |       |
| 7     | Speed over ground in Knots       | k.k   |
| 8     | N                                |       |
| 9     | ,                                |       |
| 10    | K                                |       |
| 11    | Mode                             |       |
| 12    | Checksum                         |       |

**PSXN,20: Data Quality**

10+351:23:59:58.200 \$PSXN,20,1,2,0,0\*38

| Field | Data  | Units       |
|-------|---|-------------|
| 1     | RVDAS Time Tag  |             |
| 2     | \$PSXN Tag  |             |
| 3     | 20 (PSXN identifier)  |             |
| 3     | Horizontal position and velocity quality: 0 = normal, 1 = reduced performance, 2 = invalid data |             |
| 4     | Height and vertical velocity quality: 0 = normal, 1 = reduced performance, 2 = invalid data     |             |
| 5     | Heading quality: 0 = normal, 1 = reduced performance, 2 = invalid data                          |             |
| 6     | Roll and pitch quality: 0 = normal, 1 = reduced performance, 2 = invalid data                   |             |
| 7     | *Check sum  | hexadecimal |

**PSXN,23: Roll, Pitch, Heading and Heave**

10+351:23:59:58.213 \$PSXN,23,0.02,-0.76,330.56,\*0B

| Field | Data   | Units       |
|-------|--|-------------|
| 1     | RVDAS Time Tag                               |             |
| 2     | \$PSXN Tag                                   |             |
| 3     | 23 (PSXN identifier)                         |             |
| 3     | Roll in degrees. Positive with port side up. | d.dd        |
| 4     | Pitch in degrees. Positive with bow up.      | d.dd        |
| 5     | Heading in degrees true                      | d.dd        |
| 6     | Heave in meters. Positive is down            | m.mm        |
| 7     | *Check sum                                   | hexadecimal |

**Igar - Garmin GPS****GGA: Global Positioning Fix Data**

08+034:12:26:06.131 \$GPGGA,122607,6446.4733,S,06403.4455,W,1,11,0.9,-193.4,M,9.7,M,,\*5A

| Field | Data                                      | Units     |
|-------|---|-----------|
| 1     | RVDAS Time Tag                            |           |
| 2     | \$GPGGA Tag                               |           |
| 3     | UTC of position                           | hhmmss.ss |
| 4     | Latitude in degrees with decimal minutes  | ddmm.mmm  |
| 5     | North (N) or South (S)                    |           |
| 6     | Longitude in degrees with decimal minutes | ddmm.mmm  |

| Field | Data   | Units  |
|-------|--|--------|
| 7     | East (E) or West (W)   |        |
| 8     | GPS quality (1=GPS 2=DGPS)   |        |
| 9     | Number of GPS satellites used  |        |
| 10    | Horizontal dilution of precision (HDOP)                                      |        |
| 11    | Antenna height above/below mean-sea-level (geoid)                            | meters |
| 12    | Units for antenna height (M = Meters)  |        |
| 13    | Geoidal Separation <sup>1</sup>  |        |
| 14    | Units for Geoidal Separation (M = Meters)                                    | meters |
| 15    | Age of differential GPS data, number of seconds since last SC104 Type 1 or 9 |        |
| 16    | Differential reference station ID  |        |

<sup>1</sup>Geoidal Separation: the difference between the WGS-84 earth ellipsoid and mean-sea-level (geoid). A negative value represents mean-sea-level below ellipsoid.

#### GLL: Geographic Position – Latitude/Longitude

08+034:12:26:06.211 \$GPGLL,6446.4733,S,06403.4455,W,122607,A

| Field | Data                                      | Units     |
|-------|---|-----------|
| 1     | RVDAS Time Tag                            |           |
| 2     | \$GPGLL Tag                               |           |
| 3     | Latitude                                  | ddmm.mmm  |
| 4     | North (N) or South (S)                    |           |
| 5     | Longitude                                 | ddmm.mmm  |
| 6     | East (E) or West (W)                      |           |
| 7     | UTC of position                           | hhmmss.ss |
| 8     | Status: A = Data Valid, V =Data Not Valid |           |

#### VTG: Track Made Good and Speed over Ground

08+034:12:26:06.211 \$GPVTG,167,T,151,M,000.0,N,0000.0,K

| Field | Data                    | Units   |
|-------|-------------------------|---------|
| 1     | RVDAS Time Tag          |         |
| 2     | \$GPVTG Tag             |         |
| 3     | Track, degrees true     | degrees |
| 3     | T flag for True         |         |
| 4     | Track, degrees magnetic | degrees |
| 5     | M flag for Magnetic     |         |
| 6     | Speed over Ground       | knots   |
| 7     | N flag for Knots        |         |
| 8     | Speed over Ground       | kmhr    |
| 9     | K flag for km/hr        |         |
|       |                         |         |
|       |                         |         |

**lais – AIS receiver****AIVDM: AIS Data**

14+070:00:02:38.575 !AIVDM,1,1,,B,15O5G4000oKPfggK2F2RQj7&gt;0@FU,0\*04

| Field | Data   | Units           |
|-------|--|-----------------|
| 1     | RVDAS Time Tag   |                 |
| 2     | !AIVDM   |                 |
| 3     | Total number of sentences needed to transfer the message | (1 – 9)         |
| 4     | Message Sentence Number                                  | (1 – 9)         |
| 5     | Sequential identifier to link multiple messages          | (0 – 9 or null) |
| 6     | AIS Channel  | A or B          |
| 7     | Encapsulated Binary Coded Data <sup>1</sup>              | ASCII text      |
| 8     | Number of fill bits                                      | (0 – 5)         |
| 15    | *Check sum   | hexadecimal     |

<sup>1</sup>Data is encoded as described in ITU-R M.1371

## LMG Sensors

### Shipboard Sensors

| Sensor               | Description                      | Serial #     | Cal. Date   | Status    |
|----------------------|----------------------------------|--------------|-------------|-----------|
| Port Anemometer      | Gill Ultrasonic Wind Observer II | 1246001-WC45 | N/A         | Collected |
| Starboard Anemometer | Gill Ultrasonic Wind Observer II | 1246002-WC45 | N/A         | Collected |
| Barometer            | R.M. Young 61201                 | BP00873      | 12-Jun-2014 | Collected |
| Humidity/Wet Temp    | RM Young 41382LC                 | 16308        | 18-Oct-2015 | Collected |
| PAR for Mast         | Biosph. Inst. QSR-240P           | 6394         | 20-May-2015 | Collected |
| PIR                  | Eppley PIR                       | 28903F3      | 29-Sep-2016 | Collected |
| PSP                  | Eppley PSP                       | 28933F3      | 29-Sep-2016 | Collected |
| GUV (Mast)           | Biosph. Inst. GUV-2511           | 25110805127  | 29-Sep-2016 | Collected |
| Transmissometer      | WET Labs C-Star 25 cm deep       | CST-830DR    | 22-Jul-2014 | Collected |
| MicroTSG (Primary)   | Sea-Bird 45                      | 243          | 20-May-2014 | Collected |
| MicroTSG (Secondary) | Sea-Bird 45                      | 390          | 30-Oct-2014 | Collected |
| Digital Remote Temp  | Sea-Bird 38                      | 351          | 15-Nov-2012 | Collected |
| Fluorometer          | WET Labs ECO-FL                  | FLRTD-380    | 24-Oct-2014 | Collected |

## Underway Calibration Sheets

### Anemometer- Port

**WindObserver II™**  
**Product Test Report**



**Product Tested:** WindObserver II  
**Part Number:** 1390-70-B-322  
**Serial Number:** 1246001 - WC45  
**Test Date:** 15/11/2012  
**Location:** Gill Instruments Ltd

GILL ensures that quality is inherent in all aspects of the activities and ensures that compliance with BS EN ISO9001: 2008 is maintained.

This report certifies that the above instrument has been tested in accordance with Gill internal procedures

### Results

| Test                              | Limits    | Passed |
|-----------------------------------|-----------|--------|
| Still Air Test (Zero Wind Speed)  | < 0.02m/s | Pass   |
| Wind Tunnel Test (12 m/s nominal) | Pass/Fail | Pass   |

Generic calibration is traceable to the University of Southampton wind tunnel and instrumentation is maintained in accordance with UKAS.

All tests have been successfully completed

On behalf of Gill Instruments Ltd

  
Tony Raine  
Quality Control

2002-0395 Issue 1



Gill Instruments Ltd  
Saltmarsh Park  
67 Gosport Street  
Lymington  
Hampshire  
SO41 9EG, UK

T: +44 (0) 1590 613 500  
F: +44 (0) 1590 613 555  
E: [anem@gill.co.uk](mailto:anem@gill.co.uk)

[www.gill.co.uk](http://www.gill.co.uk)



Copyright © Gill Instruments 2011

Gill Instruments Ltd  
Reg No. 3154453 Registered Office: The George Burness Centre, Christchurch Road, New Milton, BH25 8QJ



**Barometer**

**R.M. Young Company**  
2801 Aero Park Drive  
Traverse City, Michigan 49686 USA



**CALIBRATION REPORT**  
**Barometric Pressure**

Customer: *Lockheed Martin Corp*

Test Number: 4612-03B  
Test Date: 12 June 2014

Customer PO: 4900049769  
Sales Order: 4131

|  |                                |
|--|--------------------------------|
| <u>Test Sensor:</u><br>Model: 61201<br>Description: Barometric Pressure Sensor | Serial Number: <i>BP000873</i> |
|--|--------------------------------|

Report of calibration comparison of test barometric pressure sensor with National Institute of Standards and Technology traceable standard pressure calibrator at five pressures in the R.M. Young Company controlled pressure facility. Calibration accuracy  $\pm 1.0$  hPa.

| Reference<br>Pressure<br>(hPa) | Voltage<br>Output<br>(millivolts) | Indicated (1)<br>Pressure<br>(hPa) |
|--------------------------------|-----------------------------------|------------------------------------|
| 800.0                          | -2                                | 799.9                              |
| 875.0                          | 1250                              | 875.0                              |
| 950.0                          | 2501                              | 950.0                              |
| 1025.0                         | 3750                              | 1025.0                             |
| 1100.0                         | 4998                              | 1099.9                             |

(1) Calculated from voltage output

All reference equipment used in this calibration procedure have been tested by comparison to traceable standards certified by the National Institute of Standards and Technology.

Reference Instrument  
Druck Pressure Controller Model DPI515  
Fluke Multimeter Model 8060A

Serial # NIST Test Reference  
51500497 UKAS Lab 0221  
4865407 234027

Tested By: \_\_\_\_\_

**METEOROLOGICAL INSTRUMENTS**  
Tel: 231-946-3980 Fax: 231-946-4772 Email: met.sales@youngusa.com Website: youngusa.com  
ISO 9001:2008 CERTIFIED

**Air Temperature / Relative Humidity**

**R.M. Young Company**  
2801 Aero Park Drive  
Traverse City, Michigan 49686 USA

**CALIBRATION REPORT****Relative Humidity**

Customer: *Lockheed Martin*

Test Number: 3926-01R  
Test Date: 18 October 2013

Customer PO: 4100931586  
Sales Order: 3568

**Test Sensor:**

Model: 41382LC2      Serial Number: TS16308  
Description: Temperature/Relative Humidity Sensor

Report of calibration comparison of test relative humidity sensor with National Institute of Standards and Technology traceable standard relative humidity sensor at five humidity levels in the R.M. Young Company controlled humidity chamber facility. Calibration accuracy  $\pm 2.0$  %.

| Reference Humidity (%) | Current Output (milliamps) | Indicated (1) Humidity (%) |
|------------------------|----------------------------|----------------------------|
| 10.0                   | 5.8                        | 10.9                       |
| 30.2                   | 8.8                        | 30.2                       |
| 49.9                   | 12.0                       | 49.8                       |
| 69.8                   | 15.1                       | 69.2                       |
| 89.5                   | 18.3                       | 89.2                       |

(1) Calculated from voltage output

All reference equipment used in this calibration procedure have been tested by comparison to traceable standards certified by the National Institute of Standards and Technology.

**Reference Instrument**

Vaisala Humidity Sensor Model 35AC  
Fluke Multimeter Model 8060A

**Serial # NIST Test Reference**

N475040      TN 266152  
4865407      234027

Tested By: *R. Pullen*

**METEOROLOGICAL INSTRUMENTS**

Tel: 231-946-3980 Fax: 231-946-4772 Email: met.sales@youngusa.com Website: youngusa.com  
ISO 9001:2008 CERTIFIED



**R.M. Young Company**  
2801 Aero Park Drive  
Traverse City, Michigan 49686 USA

## CALIBRATION REPORT Temperature

Customer: *Lockheed Martin*

Test Number: 3926-01T  
Test Date: 18 October 2013

Customer PO: 41000931586  
Sales Order: 3568

### Test Sensor:

Model: 41382LC      Serial Number: *TS16308*  
Description: Humidity/Temperature Sensor

Report of calibration comparison of test temperature sensor with National Institute of Standards and Technology traceable standard thermometer at three temperatures in the R.M. Young Company controlled temperature calibration facilities. Calibration accuracy  $\pm 0.2^\circ$  Celsius.

| Reference<br>Temperature<br>(degrees C) | Current<br>Output<br>(mA) | Indicated (1)<br>Temperature<br>(degrees C) | Calculated (2)<br>Temperature<br>(degrees C) |
|---|---------------------------|---|--|
| 45.05                                   | 19.16                     | 44.75                                       | 45.04  |
| 22.95                                   | 15.59                     | 22.44                                       | 22.96  |
| -10.31                                  | 10.21                     | -11.19                                      | -10.32                                       |

(1) Calculated from current output.  
(2) Calculated values using derived formula:  $T = -73.466 + \text{mA} \times 6.18521$

All reference equipment used in this calibration procedure have been tested by comparison to traceable standards certified by the National Institute of Standards and Technology.

### Reference Instrument

Brooklyn Thermometer Model 43-FC  
Brooklyn Thermometer Model 22332-D5-FC  
Brooklyn Thermometer Model 2X400-D7-FC  
Keithley Multimeter Model 191

### Serial # NIST Test Reference

8006-118      204365  
25071      249763  
77532      228060  
15232      234027

Tested By: *R. Young*

## M E T E O R O L O G I C A L   I N S T R U M E N T S

Tel: 231-946-3980 Fax: 231-946-4772 Email: met.sales@youngusa.com Website: youngusa.com

## PAR for mast

## Biospherical Instruments Inc.

## CALIBRATION CERTIFICATE

Calibration Date 5/20/2013  
Model Number QSR-240  
Serial Number 6394  
Operator TPC  
Standard Lamp V-031(3/7/12)  
Probe Excitation Voltage Range: 6 to 18 VDC(+)  
Output Polarity: Positive

Probe Conditions at Calibration(in air):

Calibration Voltage: 6 VDC(+)  
Probe Current: 4.0 mA

Probe Output Voltage:

Probe Illuminated 107.0 mV  
Probe Dark 0.3 mV  
Probe Net Response 106.7 mV  
RG780 0.3 mV

Corrected Lamp Output:

Output In Air (same condition as calibration):

1.044E+16 quanta/cm<sup>2</sup>sec  
0.01733 uE/cm<sup>2</sup>sec

Calibration Scale Factor:

(To calculate irradiance, divide the net voltage reading in Volts by this value.)

Dry: 1.0225E-17 V/(quanta/cm<sup>2</sup>sec)  
6.1572E+00 V/(uE/cm<sup>2</sup>sec)

## Notes:

1. Annual calibration is recommended.
2. Calibration is performed using a Standard of Spectral Irradiance traceable to the National Institute of Standards and Technology (NIST).
3. The collector should be cleaned frequently with alcohol.
4. Calibration was performed with customer cable, when available.

QSR240R 05/24/95

PIR

**THE EPPLEY LABORATORY, INC.**

12 Sheffield Avenue, PO Box 419, Newport, Rhode Island USA 02840

Phone: 401.847.1020 Fax: 401.847.1031 Email: info@eppleylab.com

**STANDARDIZATION OF  
EPPLEY PRECISION INFRARED RADIOMETER  
Model PIR**

Serial Number: 28903F3

Resistance: 675  $\Omega$  at 23°C

Temperature Compensation Range: -20° to +40°C

This pyrgeometer has been compared against Eppley's Blackbody Calibration System under radiation intensities of approximately 200 watts meter<sup>-2</sup> and an average ambient temperature of 25°C as measured by Standard Omega Temperature Probe, RTD#1.

As a result of a series of comparisons, it has been found to have a sensitivity of:

$$3.57 \times 10^{-6} \text{ volts/watts meter}^{-2}$$

The calculation of this constant is based on the fact that the relationship between radiation intensity and emf is rectilinear to intensities of 700 watts meter<sup>-2</sup>. This radiometer is linear to within  $\pm 1.0\%$  up to this intensity.

The calibration of this instrument is traceable to the International Practical Temperature Scale (IPTS) through a precision low-temperature blackbody.

Eppley recommends a minimum calibration cycle of five (5) years but encourages annual calibrations for highest measurement accuracy. Unless otherwise stated in the remarks section below or on the Sales Order, the results are "AS FOUND / AS LEFT".

Shipped to: LMP4 ISGS(NSF)  
Port Hueneme, CA

S.O. Number: 64325  
Date: February 3, 2015

Remarks:

Date of Test: February 3, 2015

In Charge of Test:

Reviewed by:

Handwritten signatures of Delia L. Shultz and Thomas J. Rush.



PSP

**THE EPPLEY LABORATORY, INC.**

12 Sheffield Avenue, PO Box 419, Newport, Rhode Island USA 02840  
Phone: 401.847.1020 Fax: 401.847.1031 Email: info@eppleylab.com

**Calibration Certificate**

---

Instrument: Precision Spectral Pyranometer, Model PSP, Serial Number 28933F3

Procedure: This pyranometer was compared in Eppley's Integrating Hemisphere according to procedures described in **ISO 9847 Section 5.3.1** and Technical Procedure, TP01 of The Eppley Laboratory, Inc.'s Quality Assurance Manual on Calibrations.

Transfer Standard: Eppley Precision Spectral Pyranometer, Model PSP, Serial Number 21231F3

Results: **Sensitivity:**  $S = 8.13 \mu V / W m^{-2}$   
Uncertainty:  $U_{95} = \pm 0.91\%$  (95% confidence level, k=2)  
Resistance:  $686 \Omega$  at 23°C

Date of Test: February 3, 2015

Traceability: This calibration is traceable to the World Radiation Reference (WRR) through comparisons with Eppley's AHF standard self-calibrating cavity pyrheliometers which participated in the Eleventh International Pyrheliometric Comparisons (IPC XI) at Davos, Switzerland in September-October 2010. Unless otherwise stated in the remarks section below or on the Sales Order, the results of this calibration are "AS FOUND / AS LEFT".

Due Date: Eppley recommends a minimum calibration cycle of five (5) years but encourages annual calibrations for highest measurement accuracy.

Customer: LMP4 ISGS(NSF)  
Port Hueneme, CA

Signatures: Debra L. Blevins In Charge of Test: Thomas H. Kunk Reviewed by:

Eppley SO: 64325

Date of Certificate: February 3, 2015

Remarks:

*End of Report*

**GUV****Biospherical Instruments Inc.****System Calibration Certificate****THE INSTRUMENTS REFERENCED BELOW WERE FACTORY TESTED AND CALIBRATED BY****BIOSPHERICAL INSTRUMENTS INC.**

5340 Riley Street

San Diego, California 92110 USA

**Instruments: GUV-2511 No 25110805127****Optical Calibrations:**

**NIST Traceability.** For wavelengths longer than 313 nm, the specific instruments cited here were calibrated using a 1000W FEL #V-033 (3/3/15) following procedures and standards traceable to NIST Standard of Spectral Irradiance F616. Traceability paths and all procedures for all calibrated lamps and associated apparatus (shunts, power supplies, DMMs, etc) are maintained following calibration methodologies per National Bureau of Standards (US) (NBS) Special Publication 250-20 Spectral Irradiance Calibrations (1987) and NBS Publication 594-13 Optical Radiation Measurements: The 1973 Scale of Spectral Irradiance (1977).

**Solar Calibrations.** Lamp calibrations are problematic for solar UV measurements (wavelengths below 320 nm) because the solar spectrum is radically different from the lamp spectrum and changes greatly as a function of wavelength. Solar calibrations are achieved through direct comparison with measurements of a high resolution scanning spectroradiometer in San Diego (SUV-100), which is part of the National Science Foundation's UV Monitoring Network. The SUV-100 instrument has a bandwidth of 1 nm. Calibrated filter radiometer data therefore report spectral irradiance at the channel's nominal wavelengths with a bandwidth of 1 nm. Solar calibrations are typically accurate to within  $\pm 10\%$  for solar zenith angles smaller than  $75^\circ$ . At larger solar zenith angles, UV channels have a greater uncertainty due to the rapid change of the solar UV spectrum.

Note that this certificate contains a subset of the information delivered in the calibration database 25110805127v7.mdb. This database is required for operation of this system using Biospherical Instruments Inc.'s Logger® software.



Biospherical Instruments Inc.

## GUV-2511 Calibration Certificate

|                           |  |                   |  |                                 |  |                |  |
|---------------------------|--|-------------------|--|---------------------------------|--|----------------|--|
| System Serial Number      |  | 25110805127       |  | Date of Calibration             |  | 6/15/2015      |  |
| Calibration database      |  | 25110805127v7.mdb |  | Date of Certificate             |  | 6/15/2015      |  |
| DASSN                     |  | 0111              |  | Standard of Spectral Irradiance |  | V-033 (3/3/15) |  |
| Microprocessor Tag Number |  | 2                 |  | Operator                        |  | TC             |  |

| Monochromatic | Channels | Address | Wavelength [nm] | Responsivity [Amps per $\mu\text{W}/(\text{cm}^2\text{-nm})$ ] | ScaleSmall [Volts per $\mu\text{W}/(\text{cm}^2\text{-nm})$ ] | ScaleMedium [Volts per $\mu\text{W}/(\text{cm}^2\text{-nm})$ ] | ScaleLarge [Volts per $\mu\text{W}/(\text{cm}^2\text{-nm})$ ] | OffsetSmall [volts] | OffsetMedium [volts] | OffsetLarge [volts] | Measurement Units                     |
|---------------|----------|---------|-----------------|--|---|--|---|---------------------|----------------------|---------------------|---------------------------------------|
|               | Ed0305   | 2       | 305             | 4.3412E-11   | 4.4845E-06  | 1.3124E-03   | 4.0159E-01  | -4.4209E-04         | -4.4843E-04          | -5.4940E-04         | $\mu\text{W}/(\text{cm}^2\text{-nm})$ |
|               | Ed0313   | 6       | 313             | 1.7792E-10   | 1.8120E-05  | 5.3084E-03   | 1.8643E+00  | 1.3448E-04          | 1.4032E-04           | 1.2484E-03          | $\mu\text{W}/(\text{cm}^2\text{-nm})$ |
|               | Ed0320   | 8       | 320             | 2.5802E-10   | 2.6271E-05  | 7.7145E-03   | 2.5278E+00  | -1.8351E-04         | -1.8548E-04          | 6.7677E-05          | $\mu\text{W}/(\text{cm}^2\text{-nm})$ |
|               | Ed0340   | 10      | 340             | 1.9800E-10   | 2.0210E-05  | 5.9050E-03   | 2.1181E+00  | 1.0118E-04          | 9.5762E-05           | 1.2388E-03          | $\mu\text{W}/(\text{cm}^2\text{-nm})$ |
|               | Ed0380   | 12      | 380             | 7.0722E-11   | 7.2188E-06  | 2.1141E-03   | 7.2845E-01  | -2.7743E-04         | -2.8172E-04          | -1.4003E-04         | $\mu\text{W}/(\text{cm}^2\text{-nm})$ |
|               | Ed0395   | 13      | 395             | 2.7488E-10   | 2.8166E-05  | 8.2305E-03   | 2.8018E+00  | -2.2586E-04         | -2.2548E-04          | -4.9964E-04         | $\mu\text{W}/(\text{cm}^2\text{-nm})$ |

| Broadband | Channels | Address | Wavelength [nm] | Responsivity [Amps per $\mu\text{E}/(\text{cm}^2\text{-s})$ ] | ScaleSmall [Volts per $\mu\text{E}/(\text{cm}^2\text{-s})$ ] | ScaleMedium [Volts per $\mu\text{E}/(\text{cm}^2\text{-s})$ ] | ScaleLarge [Volts per $\mu\text{E}/(\text{cm}^2\text{-s})$ ] | OffsetSmall [volts] | OffsetMedium [volts] | OffsetLarge [volts] | Measurement Units                      |
|-----------|----------|---------|-----------------|---|--|---|--|---------------------|----------------------|---------------------|--|
|           | Ed0PAR   | 18      | 400-700         | 1.6871E-05  | 1.6983E+00   | 4.9737E+02  | 1.6394E+05   | -1.0804E-04         | -1.0693E-04          | 6.2169E-04          | $\mu\text{E}/(\text{cm}^2\text{-sec})$ |

| Auxiliary | Channels | Address | Wavelength | Responsivity | ScaleS | ScaleM | ScaleL | OffsetS | OffsetM | OffsetL | Measurement Units  |
|-----------|----------|---------|------------|--------------|--------|--------|--------|---------|---------|---------|--------------------|
|           | Ed0Temp  | 22      | 0          | 1            | 0.01   | 0.01   | 0.01   | 0       | 0       | 0       | $^{\circ}\text{C}$ |
|           | Ed0Vin   | 27      | 0          | 1            | -0.25  | -0.25  | -0.25  | 0       | 0       | 0       | V                  |

© Biospherical Instruments Inc., 5340 Riley Street, San Diego, California 92110 USA. Contact [support@biospherical.com](mailto:support@biospherical.com) for more information.



**Transmissometer**

PO Box 518  
620 Applegate St.  
Philomath, OR 97370



(541) 929-5650  
Fax (541) 929-5277  
[www.wetlabs.com](http://www.wetlabs.com)

**C-Star Calibration**

|  |               |      |           |            |         |
|--|---------------|------|-----------|------------|---------|
| Date                                   | July 22, 2014 | S/N# | CST-830DR | Pathlength | 25cm    |
| <b>Analog output</b>                   |               |      |           |            |         |
| $V_d$                                  | 0.059 V       |      |           |            |         |
| $V_{air}$                              | 4.713 V       |      |           |            |         |
| $V_{ref}$                              | 4.622 V       |      |           |            |         |
| Temperature of calibration water       |               |      |           |            | 22.4 °C |
| Ambient temperature during calibration |               |      |           |            | 21.8 °C |

Relationship of transmittance ( $Tr$ ) to beam attenuation coefficient ( $c$ ), and pathlength ( $x$ , in meters):  $Tr = e^{-cx}$

To determine beam transmittance:  $Tr = (V_{sig} - V_{dark}) / (V_{ref} - V_{dark})$

To determine beam attenuation coefficient:  $c = -1/x * \ln(Tr)$

$V_d$  Meter output with the beam blocked. This is the offset.

$V_{air}$  Meter output in air with a clear beam path.

$V_{ref}$  Meter output with clean water in the path.

Temperature of calibration water: temperature of clean water used to obtain  $V_{ref}$ .

Ambient temperature: meter temperature in air during the calibration.

$V_{sig}$  Measured signal output of meter.

## Thermosalinograph (Temperature) – Primary

## Sea-Bird Electronics, Inc.

13431 NE 20th Street, Bellevue, WA 98005-2010 USA

Phone: (+1) 425-643-9866 Fax (+1) 425-643-9954 Email: seabird@seabird.com

SENSOR SERIAL NUMBER: 0243

CALIBRATION DATE: 16-May-14

SBE 45 TEMPERATURE CALIBRATION DATA

ITS-90 TEMPERATURE SCALE

## COEFFICIENTS:

a0 = 1.417246e-005

a1 = 2.749041e-004

a2 = -2.553507e-006


a3 = 1.527836e-007

| BATH TEMP<br>(ITS-90) | INSTRUMENT<br>OUTPUT | INST TEMP<br>(ITS-90) | RESIDUAL<br>(ITS-90) |
|-----------------------|----------------------|-----------------------|----------------------|
| 1.0000                | 759568.9             | 1.0000                | -0.0000              |
| 4.5000                | 647915.0             | 4.5000                | 0.0000               |
| 15.0000               | 410152.8             | 14.9999               | -0.0001              |
| 18.5000               | 354383.2             | 18.5001               | 0.0001               |
| 24.0000               | 283362.0             | 24.0000               | -0.0000              |
| 29.0000               | 232648.2             | 29.0000               | 0.0000               |
| 32.5000               | 203331.4             | 32.5000               | -0.0000              |

$$\text{Temperature ITS-90} = 1/\{a_0 + a_1[\ln(n)] + a_2[\ln^2(n)] + a_3[\ln^3(n)]\} - 273.15 \text{ (}^\circ\text{C)}$$

Residual = instrument temperature - bath temperature

n = instrument output

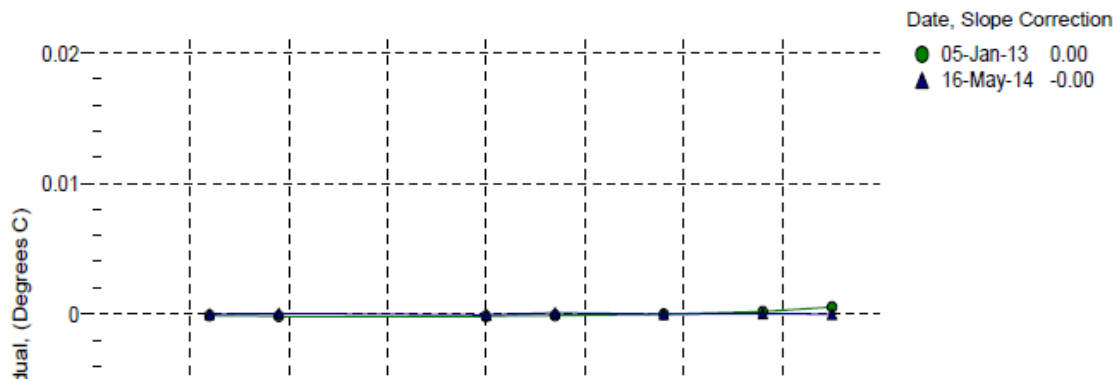

**Thermosalinograph (Conductivity) – Primary****Sea-Bird Electronics, Inc.**

13431 NE 20th Street, Bellevue, WA 98005-2010 USA

Phone: (+1) 425-643-9866 Fax (+1) 425-643-9954 Email: seabird@seabird.com

SENSOR SERIAL NUMBER: 0243  
 CALIBRATION DATE: 16-May-14

SBE 45 CONDUCTIVITY CALIBRATION DATA  
 PSS 1978: C(35,15,0) = 4.2914 Siemens/meter

**COEFFICIENTS:**

g = -1.008861e+000  
 h = 1.574112e-001  
 i = -3.646901e-004  
 j = 5.431565e-005

CPcor = -9.5700e-008  
 CTcor = 3.2500e-006  
 WBOTC = 1.1173e-006


| BATH TEMP<br>(ITS-90) | BATH SAL<br>(PSU) | BATH COND<br>(Siemens/m) | INST FREQ<br>(Hz) | INST COND<br>(Siemens/m) | RESIDUAL<br>(Siemens/m) |
|-----------------------|-------------------|--------------------------|-------------------|--------------------------|-------------------------|
| 22.0000               | 0.0000            | 0.00000                  | 2536.23           | 0.00000                  | 0.00000                 |
| 1.0000                | 34.6704           | 2.96468                  | 5031.60           | 2.96467                  | -0.00001                |
| 4.5000                | 34.6504           | 3.27061                  | 5221.13           | 3.27062                  | 0.00001                 |
| 15.0000               | 34.6078           | 4.24873                  | 5784.74           | 4.24873                  | -0.00000                |
| 18.5000               | 34.5989           | 4.59263                  | 5969.99           | 4.59263                  | -0.00000                |
| 24.0000               | 34.5892           | 5.14857                  | 6257.55           | 5.14856                  | -0.00000                |
| 29.0000               | 34.5834           | 5.66845                  | 6514.65           | 5.66846                  | 0.00001                 |
| 32.5000               | 34.5796           | 6.03937                  | 6691.83           | 6.03936                  | -0.00000                |

$$f = \text{INST FREQ} * \text{sqrt}(1.0 + \text{WBOTC} * t) / 1000.0$$

$$\text{Conductivity} = (g + h * f^2 + i * f^3 + j * f^4) / (1 + \delta * t + \epsilon * p) \text{ Siemens / meter}$$

$$t = \text{temperature} [^{\circ}\text{C}]; p = \text{pressure} [\text{decibars}]; \delta = \text{CTcor}; \epsilon = \text{CPcor};$$

$$\text{Residual} = \text{instrument conductivity} - \text{bath conductivity}$$

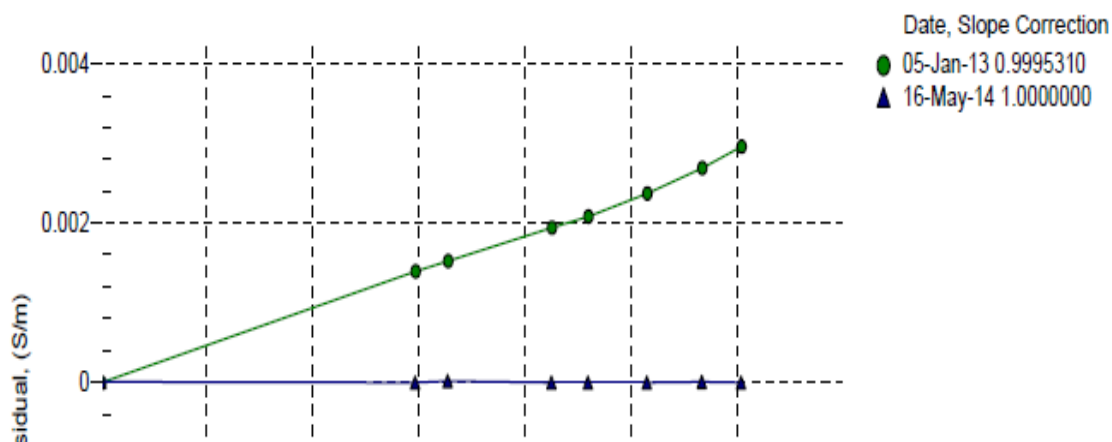

**Thermosalinograph (Temperature) – Secondary****Sea-Bird Electronics, Inc.**

13431 NE 20th Street, Bellevue, WA 98005-2010 USA

Phone: (+1) 425-643-9866 Fax (+1) 425-643-9954 Email: seabird@seabird.com

SENSOR SERIAL NUMBER: 0390

CALIBRATION DATE: 30-Oct-14

SBE 45 TEMPERATURE CALIBRATION DATA

ITS-90 TEMPERATURE SCALE

## COEFFICIENTS:

a0 = 8.496577e-006

a1 = 2.825921e-004

a2 = -3.093430e-006


a3 = 1.690910e-007

| BATH TEMP<br>(ITS-90) | INSTRUMENT<br>OUTPUT | INST TEMP<br>(ITS-90) | RESIDUAL<br>(ITS-90) |
|-----------------------|----------------------|-----------------------|----------------------|
| 1.0000                | 662306.1             | 1.0000                | 0.0000               |
| 4.5000                | 565262.5             | 4.5000                | -0.0000              |
| 15.0000               | 358389.6             | 15.0000               | 0.0000               |
| 18.5000               | 309815.7             | 18.5000               | -0.0000              |
| 24.0000               | 247915.6             | 23.9999               | -0.0001              |
| 29.0000               | 203683.3             | 29.0001               | 0.0001               |
| 32.5000               | 178100.4             | 32.5000               | -0.0000              |

$$\text{Temperature ITS-90} = 1 / \{a_0 + a_1[\ln(n)] + a_2[\ln^2(n)] + a_3[\ln^3(n)]\} - 273.15 \text{ (}^\circ\text{C)}$$

Residual = instrument temperature - bath temperature

n = instrument output

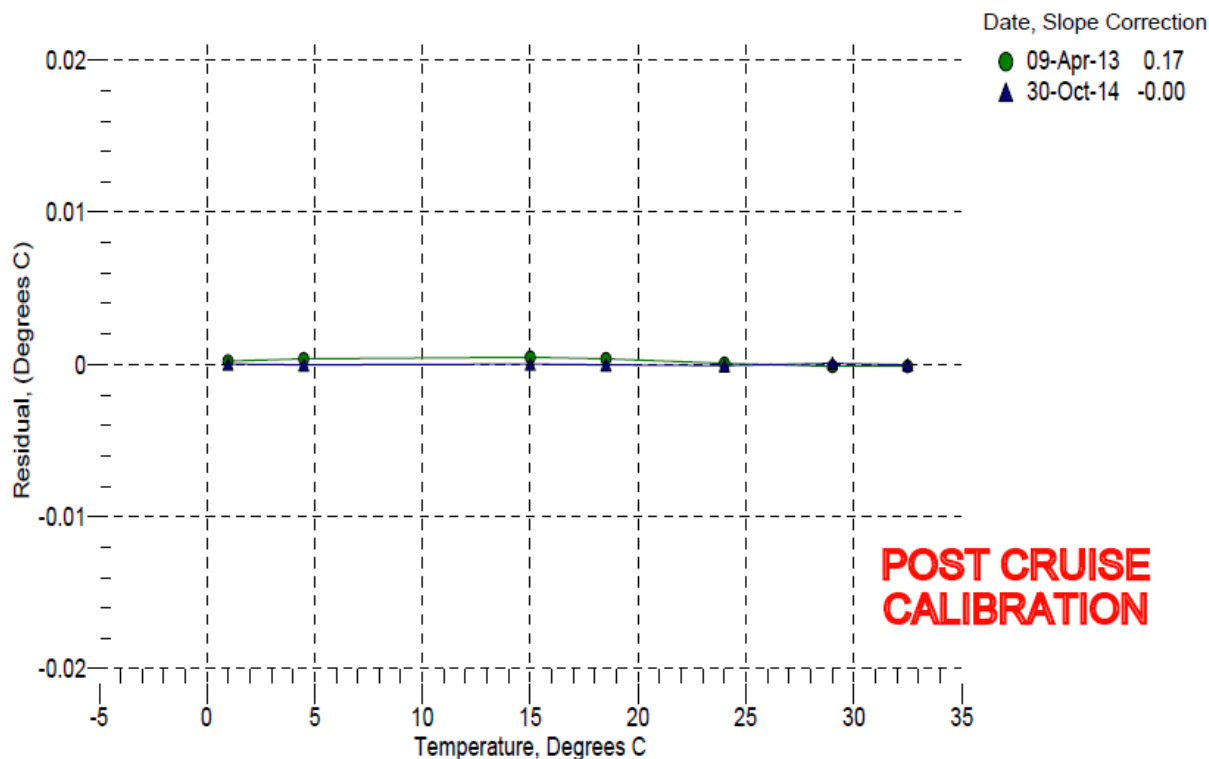

**Thermosalinograph (Conductivity) – Secondary****Sea-Bird Electronics, Inc.**

13431 NE 20th Street, Bellevue, WA 98005-2010 USA

Phone: (+1) 425-643-9866 Fax (+1) 425-643-9954 Email: seabird@seabird.com

SENSOR SERIAL NUMBER: 0390  
CALIBRATION DATE: 30-Oct-14SBE 45 CONDUCTIVITY CALIBRATION DATA  
PSS 1978: C(35,15,0) = 4.2914 Siemens/meter

## COEFFICIENTS:

g = -9.863328e-001  
h = 1.453844e-001  
i = -4.104173e-004  
j = 5.237151e-005CPcor = -9.5700e-008  
CTcor = 3.2500e-006  
WBOTC = 2.8724e-007


| BATH TEMP<br>(ITS-90) | BATH SAL<br>(PSU) | BATH COND<br>(Siemens/m) | INST FREQ<br>(Hz) | INST COND<br>(Siemens/m) | RESIDUAL<br>(Siemens/m) |
|-----------------------|-------------------|--------------------------|-------------------|--------------------------|-------------------------|
| 22.0000               | 0.0000            | 0.00000                  | 2611.09           | 0.00000                  | 0.00000                 |
| 1.0000                | 34.6932           | 2.96644                  | 5227.11           | 2.96644                  | -0.00000                |
| 4.5000                | 34.6730           | 3.27253                  | 5425.21           | 3.27254                  | 0.00001                 |
| 15.0000               | 34.6287           | 4.25103                  | 6014.01           | 4.25103                  | -0.00000                |
| 18.5000               | 34.6182           | 4.59492                  | 6207.39           | 4.59491                  | -0.00000                |
| 24.0000               | 34.6058           | 5.15076                  | 6507.48           | 5.15076                  | -0.00000                |
| 29.0000               | 34.5974           | 5.67049                  | 6775.69           | 5.67050                  | 0.00001                 |
| 32.5000               | 34.5926           | 6.04138                  | 6960.54           | 6.04137                  | -0.00001                |

$$f = \text{INST FREQ} * \sqrt{1.0 + \text{WBOTC} * t} / 1000.0$$

$$\text{Conductivity} = (g + h * f^2 + i * f^3 + j * f^4) / (1 + \delta * t + \epsilon * p) \text{ Siemens / meter}$$

t = temperature[°C]; p = pressure[decibars];  $\delta$  = CTcor;  $\epsilon$  = CPcor;

Residual = instrument conductivity - bath conductivity

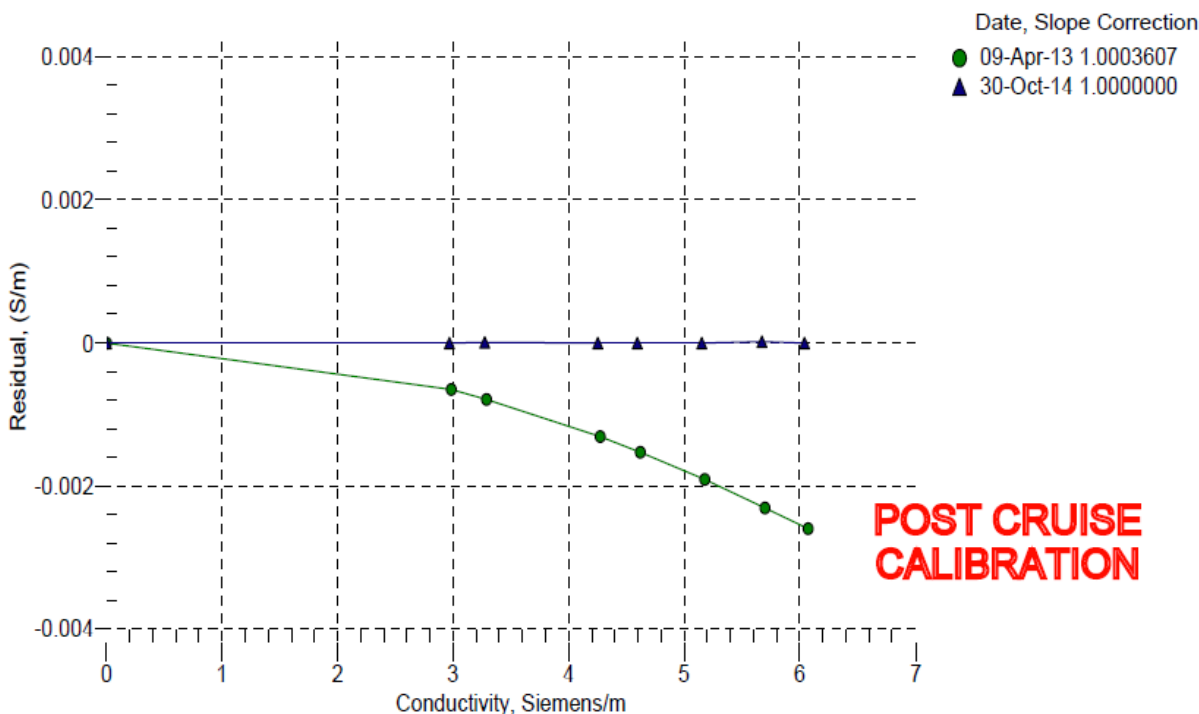

## Digital Remote Temperature

## Sea-Bird Electronics, Inc.

13431 NE 20th Street, Bellevue, WA 98005-2010 USA

Phone: (+1) 425-643-9866 Fax (+1) 425-643-9954 Email: seabird@seabird.com

SENSOR SERIAL NUMBER: 0351  
CALIBRATION DATE: 28-Dec-13SBE 38 TEMPERATURE CALIBRATION DATA  
ITS-90 TEMPERATURE SCALE


## ITS-90 COEFFICIENTS

$a_0 = 6.847307e-005$   
 $a_1 = 2.737587e-004$   
 $a_2 = -2.376425e-006$   
 $a_3 = 1.515438e-007$

| BATH TEMP<br>(ITS-90) | INSTRUMENT<br>OUTPUT | INST TEMP<br>(ITS-90) | RESIDUAL<br>(ITS-90) |
|-----------------------|----------------------|-----------------------|----------------------|
| -1.50000              | 674751.5             | -1.49996              | 0.00004              |
| 1.00000               | 601342.4             | 0.99997               | -0.00003             |
| 4.50020               | 513289.0             | 4.50015               | -0.00005             |
| 8.00000               | 439602.0             | 7.99997               | -0.00003             |
| 11.50000              | 377712.0             | 11.50004              | 0.00004              |
| 14.99990              | 325560.5             | 15.00003              | 0.00013              |
| 18.50020              | 281469.0             | 18.50008              | -0.00012             |
| 22.00000              | 244073.8             | 22.00011              | 0.00011              |
| 25.50000              | 212261.3             | 25.49992              | -0.00008             |
| 29.00010              | 185112.4             | 29.00003              | -0.00007             |
| 32.50010              | 161877.4             | 32.50017              | 0.00007              |

$$\text{Temperature ITS-90} = 1 / \{ a_0 + a_1[\ln(n)] + a_2[\ln^2(n)] + a_3[\ln^3(n)] \} - 273.15 \text{ (}^\circ\text{C)}$$

Residual = instrument temperature - bath temperature

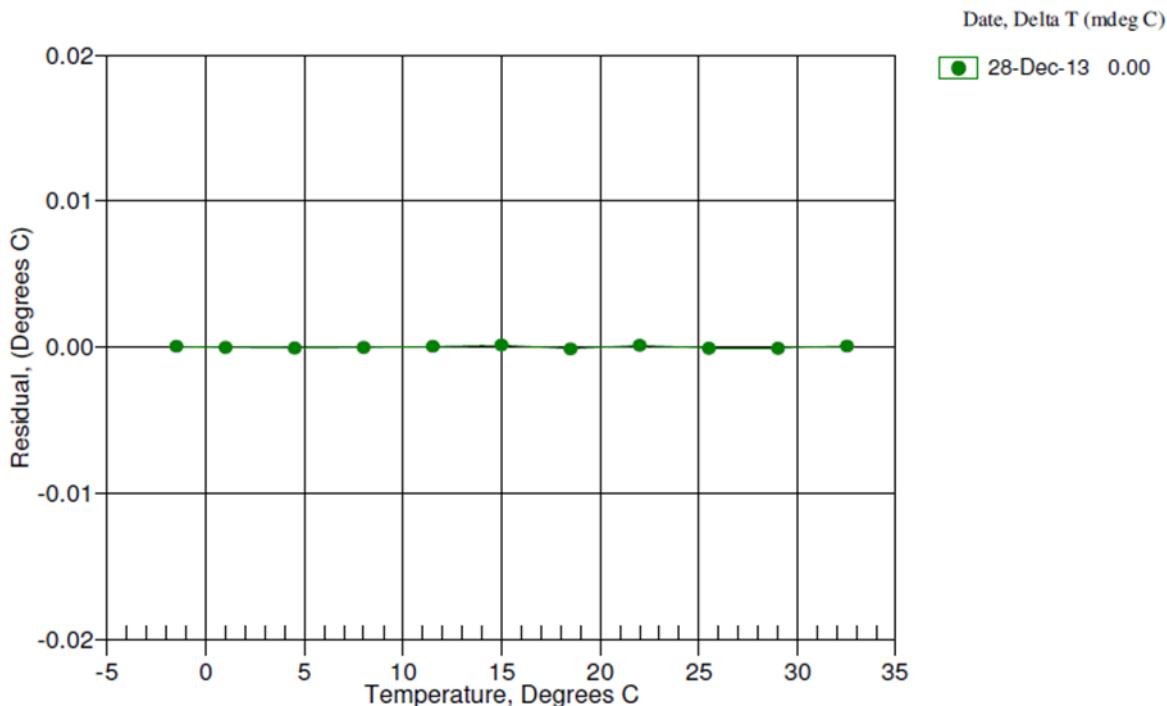

**Fluorometer**

PO Box 518  
620 Applegate St.  
Philomath, OR 97370



(541) 929-5650  
Fax (541) 929-5277  
[www.wetlabs.com](http://www.wetlabs.com)

**ECO Chlorophyll Fluorometer Characterization Sheet**

Date: 10/24/2014

S/N: FLRTD-380

Chlorophyll concentration expressed in µg/l can be derived using the equation:

$$\text{CHL } (\mu\text{g/l}) = \text{Scale Factor} * (\text{Output} - \text{Dark Counts})$$

|                   | Analog<br>Range 1 | Analog<br>Range 2 | Analog<br>Range 4<br>(default) | Digital           |
|-------------------|-------------------|-------------------|--------------------------------|-------------------|
| Dark Counts       | 0.109             | 0.062             | 0.040 V                        | 75 counts         |
| Scale Factor (SF) | 7                 | 14                | 28 µg/l/V                      | 0.0084 µg/l/count |
| Maximum Output    | 4.97              | 4.97              | 4.97 V                         | 16326 counts      |
| Resolution        | 0.6               | 0.6               | 0.6 mV                         | 0.7 counts        |

Ambient temperature during characterization

22.3 °C

**Analog Range:** 1 (most sensitive, 0–4,000 counts), 2 (midrange, 0–8,000 counts), 4 (entire range, 0–16,000 counts).

**Dark Counts:** Signal output of the meter in clean water with black tape over detector.

**SF:** Determined using the following equation:  $SF = x \div (\text{output} - \text{dark counts})$ , where x is the concentration of the solution used during instrument characterization. SF is used to derive instrument output concentration from the raw signal output of the fluorometer.

**Maximum Output:** Maximum signal output the fluorometer is capable of.

**Resolution:** Standard deviation of 1 minute of collected data.

The relationship between fluorescence and chlorophyll-a concentrations *in-situ* is highly variable. The scale factor listed on this document was determined using a mono-culture of phytoplankton (*Thalassiosira weissflogii*). The population was assumed to be reasonably healthy and the concentration was determined by using the absorption method. To accurately determine chlorophyll concentration using a fluorometer, you must perform secondary measurements on the populations of interest. This is typically done using extraction-based measurement techniques on discrete samples. For additional information on determining chlorophyll concentration see "Standard Methods for the Examination of Water and Wastewater" part 10200 H, published jointly by the American Public Health Association, American Water Works Association, and the Water Environment Federation.

FLRTD-380

Revision J

3/17/08

## Acquisition and Processing Information

### Processing Specifics

Refer to the InstCoef.txt file along with the specific instrument calibration sheets, both located in the Cal/ directory of the data distribution, for information on how the RVDAS data was collected and processed.

### Significant Notes

Incorrect latitude and longitude information was recorded in the first nine XCTD drops. A supplementary spread sheet file called "LMG1508\_XCTD\_coordinates.xlsx" containing the correct values was generated and included with the XCTD data. The XCTD drop coordinate values can also be seen in the scanned image of the hand-entered XCTD LogSheet.

### Errors and Events

This section lists all significant events and known problems with acquisition during this cruise including instrument failures, data acquisition system failures, and other factors affecting this data set.

| Day Of Year | Time (GMT) | Event  | Location                |
|-------------|------------|--|-------------------------|
| 275         | 14:00      | Depart Punta Arenas  | Punta Arenas            |
| 275         | 17:30      | 2 <sup>nd</sup> Departure of PA with Argentine observer    | Punta Arenas            |
| 276         | 03:30      | O2 Chiller On  |                         |
| 276         | 06:10      | Start DAS  | 68 West                 |
| 276         | 17:50      | O2 System Saturday maintenance                             |                         |
| 276         | 21:40      | Start Drake Survey   |                         |
| 277         | 12:45      | Change of course from Smith Is. South Bound to east of KGI |                         |
| 277         | 13:05      | Swapped chillers in O2 system                              |                         |
| 277         | 20:02      | EEZ Crossing Southbound                                    | 58° 13'S 62 50N         |
| 278         | 01:45      | Drifter and Air Sample                                     | 59 South                |
| 278         | 0516       | Noticed and fixed XCTD lat/lon data                        |                         |
| 278         | 13:56      | Stop/Start O2 System to troubleshoot                       |                         |
| 279         | 03:30      | End Drake Survey   |                         |
| 279         |            | Swapped Fish out 328 in 232                                | Gaby training           |
| 279         | 13:30      | Stop O2 System to troubleshoot                             |                         |
| 280         | 18:00      | Stopped DAS: ADCP, PCO2 off                                | Ice Edge Palmer Station |
| 280         | 21:30      | O2 Chiller On  | Palmer Station          |
| 281         | 10:44      | O2 System On   | Palmer Station          |
| 286         | 13:07      | Sonars, O2 System On, PCO2 no start                        | Departing PAL           |
| 286         | 13:15      | DAS in Underway  |                         |
| 286         | 19:05      | PCO2 started   |                         |
| 287         | 18:30      | ADCP Bottom Track Off                                      |                         |
| 288         | 11:07      | Drifter deployed   | 60S                     |
| 288         | 22:34      | EEZ Crossing Northbound                                    | 58°12'S 62° 67'N        |
| 289         | 17:43      | ADCP Bottom Tracking On                                    |                         |
| 290         | 09:18      | DAS to InPort mode; ADCP, O2, PCO2 Off                     | 68W                     |