

LMG 1612

Cruise Data Report

Austin McHugh

W. Kevin Pedigo

03 Dec 2016 – 20 Dec 2016



Table of Contents

| | |
|--|-----------|
| INTRODUCTION..... | 14 |
| ARCHIVE DATA EXTRACTION | 15 |
| DISTRIBUTION CONTENTS | 16 |
| ADCP DATA (/ADCP) | 16 |
| DATA COLLECTION PARAMETERS (/CAL) | 16 |
| IMAGERY (/IMAGERY)..... | 16 |
| MAPS (/MAPS) | 16 |
| OCEAN DATA (/OCEAN)..... | 16 |
| <i>XBT Data (/Ocean/XBT)</i> | 16 |
| <i>XCTD Data (/Ocean/XCTD)</i> | 16 |
| <i>CTD Data (/Ocean/CTD)</i> | 16 |
| AUTOMATICALLY PROCESSED DATA (/PROCESS)..... | 16 |
| <i>QC Plots (/process/QC.tar)</i> | 16 |
| REPORTS (/REPORT)..... | 17 |
| INSTRUMENT DATA (/RVDAS)..... | 17 |
| UTILITY PROGRAMS (/UTILITY) | 17 |
| JGOFS DATA SET | 18 |
| PCO ₂ -MERGED DATA SET | 19 |
| RVDAS..... | 20 |
| SENSORS AND INSTRUMENTS | 20 |
| UNDERWAY SENSORS | 21 |
| <i>Meteorological Data</i> | 21 |
| <i>Navigational Data</i> | 21 |
| <i>Geophysical Data</i> | 21 |

| | |
|--|-----------|
| Oceanographic Data | 21 |
| DATA FILE NAMES AND STRUCTURES | 22 |
| LKNU – KNUDSEN CHIRP 3260 SONAR | 23 |
| LWN1 - WINCHES | 23 |
| LMWX – CAMPBELL METEOROLOGICAL DAS | 24 |
| LGUV – BIOSPHERICAL GUV | 25 |
| LSEA – WET WALL FLOWS, TRANSMISSOMETER | 26 |
| UTSG – MICROTSIG, THERMOSALINOGRAPH | 27 |
| LRTM – DIGITAL REMOTE TEMPERATURE | 27 |
| LDFL – FLUOROMETER, WETLAB ECO | 27 |
| LGO2 – OXYGEN SYSTEM | 28 |
| LOXY – OXYGEN (PART OF PCO2 SYSTEM, SEPARATE FROM OXYGEN SYSTEM) | 30 |
| LPCO – PCO2 SYSTEM | 31 |
| LSVP - SOUND VELOCITY PROBE IN ADCP TRANSDUCER WELL | 32 |
| LADC – ADCP SPEED LOG | 32 |
| LGYR - GYROCOMPASS | 33 |
| LSEP – SEAPATH 330 GPS | 33 |
| LGAR - GARMIN GPS | 37 |
| LAIS – AIS RECEIVER | 39 |
| LMG SENSORS | 40 |
| SHIPBOARD SENSORS | 40 |
| CTD SENSORS | 40 |

| | |
|------------------------------------|-----------|
| 0232..... | 40 |
| 11-APR-2016 | 40 |
| 4573..... | 40 |
| 3-FEB-2015..... | 40 |
| 5025..... | 40 |
| 22-APR-2015 | 40 |
| PRIMARY CONDUCTIVITY | 40 |
| SEABIRD SBE4 | 40 |
| 2065..... | 40 |
| 22-JUL-2015 | 40 |
| SECONDARY CONDUCTIVITY..... | 40 |
| SEABIRD SBE4 | 40 |
| 2247..... | 40 |
| 22-APR-2015 | 40 |
| FLUOROMETER | 40 |
| WET LABS ECO | 40 |
| FLRTD-398..... | 40 |
| 17-JUN-2015 | 40 |
| PRIMARY OXYGEN..... | 40 |
| SEABIRD 43 | 40 |
| 0179..... | 40 |
| 02-AUG-2015..... | 40 |
| SECONDARY OXYGEN | 41 |
| SEABIRD 43 | 41 |
| 0181..... | 41 |
| 27-APR-2016 | 41 |
| PAR..... | 41 |

| | |
|--|-----------|
| BIOSPHERICAL INSTRUMENTS INC..... | 41 |
| 4722..... | 41 |
| 17-FEB-2015 | 41 |
| ALTIMETER..... | 41 |
| TELEDYNE BENTHOS PSA-916 | 41 |
| 54648..... | 41 |
| N/A..... | 41 |
| | |
| UNDERWAY CALIBRATION SHEETS..... | 42 |
| CTD CALIBRATION SHEETS | 59 |
| <i>Fish.....</i> | <i>59</i> |
| <i>Primary Temperature.....</i> | <i>60</i> |

Sea-Bird Electronics, Inc.

13431 NE 20th Street, Bellevue, WA 98005-2010 USA

Phone: (+1) 425-643-9866 Fax (+1) 425-643-9954 Email: seabird@seabird.com

SENSOR SERIAL NUMBER: 4573
CALIBRATION DATE: 04-Feb-15

SBE 3 TEMPERATURE CALIBRATION DATA
ITS-90 TEMPERATURE SCALE


ITS-90 COEFFICIENTS:

g = 4.33732836e-003
h = 6.37616781e-004
i = 2.23244862e-005
j = 2.11364089e-006
f₀ = 1000.0

| BATH TEMP (ITS-90) | INSTRUMENT FREQ (Hz) | INST TEMP (ITS-90) | RESIDUAL (ITS-90) |
|-----------------------|-------------------------|-----------------------|----------------------|
| -1.5001 | 2899.996 | -1.5000 | 0.00007 |
| 1.0000 | 3067.907 | 0.9999 | -0.00006 |
| 4.5000 | 3314.668 | 4.4999 | -0.00005 |
| 8.0000 | 3575.412 | 8.0000 | -0.00005 |
| 11.4999 | 3850.524 | 11.5000 | 0.00009 |
| 14.9999 | 4140.368 | 15.0000 | 0.00007 |
| 18.5000 | 4445.313 | 18.5000 | -0.00001 |
| 21.9999 | 4765.695 | 21.9999 | 0.00001 |
| 25.5000 | 5101.868 | 25.4999 | -0.00008 |
| 29.0000 | 5454.150 | 28.9999 | -0.00006 |
| 32.5000 | 5822.861 | 32.5001 | 0.00007 |

$$\text{Temperature ITS-90} = 1/(g + h[\ln(f_0/f)] + i[\ln^2(f_0/f)] + j[\ln^3(f_0/f)]) - 273.15 \text{ (}^\circ\text{C)}$$

Residual = instrument temperature - bath temperature

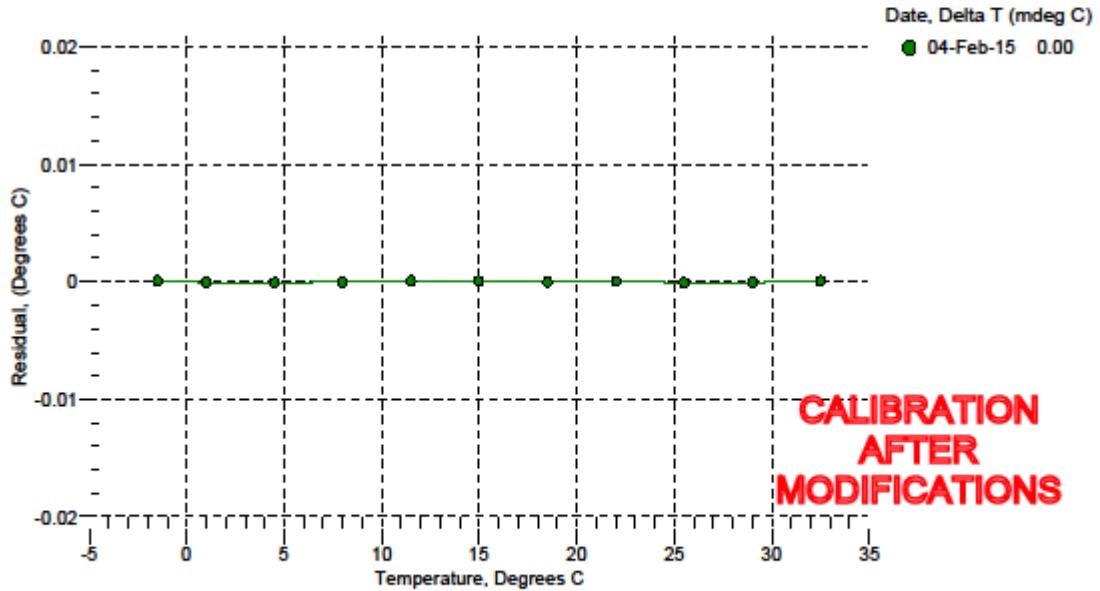

.... 60

Secondary Temperature..... 61

Sea-Bird Electronics, Inc.

13431 NE 20th Street, Bellevue, WA 98005-2010 USA

Phone: (+1) 425-643-9866 Fax (+1) 425-643-9954 Email: seabird@seabird.com

SENSOR SERIAL NUMBER: 5025
CALIBRATION DATE: 22-Apr-15

SBE 3 TEMPERATURE CALIBRATION DATA
ITS-90 TEMPERATURE SCALE


ITS-90 COEFFICIENTS:

g = 4.37632319e-003
h = 6.37757385e-004
i = 2.17047856e-005
j = 1.92752040e-006
f₀ = 1000.0

| BATH TEMP (ITS-90) | INSTRUMENT FREQ (Hz) | INST TEMP (ITS-90) | RESIDUAL (ITS-90) |
|-----------------------|-------------------------|-----------------------|----------------------|
| -1.5001 | 3092.452 | -1.5001 | 0.00003 |
| 0.9999 | 3271.855 | 0.9999 | 0.00001 |
| 4.5000 | 3535.520 | 4.4999 | -0.00007 |
| 8.0000 | 3814.143 | 7.9999 | -0.00007 |
| 11.4999 | 4108.142 | 11.5000 | 0.00009 |
| 14.9999 | 4417.906 | 15.0000 | 0.00007 |
| 18.4999 | 4743.830 | 18.5000 | 0.00006 |
| 22.0000 | 5086.291 | 21.9999 | -0.00006 |
| 25.5000 | 5445.655 | 25.4999 | -0.00007 |
| 29.0000 | 5822.277 | 29.0000 | -0.00003 |
| 32.4999 | 6216.485 | 32.5000 | 0.00006 |

$$\text{Temperature ITS-90} = 1/(g + h[\ln(f_0/f)] + i[\ln^2(f_0/f)] + j[\ln^3(f_0/f)]) - 273.15 \text{ (}^\circ\text{C)}$$

Residual = instrument temperature - bath temperature

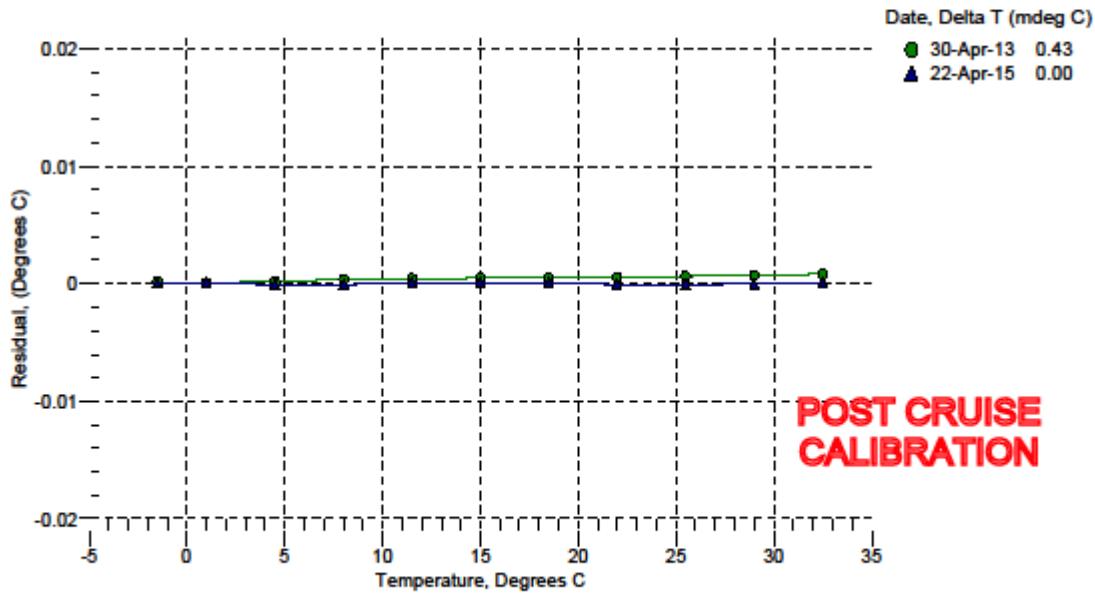

.... 61

Primary Conductivity..... 62

Sea-Bird Electronics, Inc.

13431 NE 20th Street, Bellevue, WA 98005-2010 USA

Phone: (+1) 425-643-9866 Fax (+1) 425-643-9954 Email: seabird@seabird.com

SENSOR SERIAL NUMBER: 2065
CALIBRATION DATE: 23-Jun-15

SBE 4 CONDUCTIVITY CALIBRATION DATA
PSS 1978: C(35,15,0) = 4.2914 Siemens/meter

COEFFICIENTS:

| | |
|----------------------|--------------------------------|
| g = -9.81886753e+000 | CPCor = -9.5700e-008 (nominal) |
| h = 1.35970463e+000 | CTcor = 3.2500e-006 (nominal) |
| i = -3.26130990e-003 | |
| j = 3.08227604e-004 | |


| BATH TEMP (ITS-90) | BATH SAL (PSU) | BATH COND (Siemens/m) | INST FREQ (kHz) | INST COND (Siemens/m) | RESIDUAL (Siemens/m) |
|-----------------------|-------------------|--------------------------|--------------------|--------------------------|-------------------------|
| 0.0000 | 0.0000 | 0.00000 | 2.69375 | 0.00000 | 0.00000 |
| -1.0000 | 34.5979 | 2.78862 | 5.28272 | 2.78859 | -0.00002 |
| 1.0000 | 34.5983 | 2.95910 | 5.40087 | 2.95913 | 0.00003 |
| 15.0000 | 34.5992 | 4.24779 | 6.22105 | 4.24780 | 0.00001 |
| 18.5000 | 34.5991 | 4.59265 | 6.42260 | 4.59263 | -0.00002 |
| 29.0000 | 34.5966 | 5.67037 | 7.01479 | 5.67038 | 0.00001 |
| 32.5000 | 34.5890 | 6.04082 | 7.20692 | 6.04082 | -0.00000 |

$$f = \text{INST FREQ} / 1000.0$$

$$\text{Conductivity} = (g + h * f^2 + i * f^3 + j * f^4) / (1 + \delta * t + e * p) \text{ Siemens / meter}$$

t = temperatur e[°C]; p = pressure[decibars]; δ = CTcor; e = CPCor;

Residual = instrument conductivity - bath conductivity

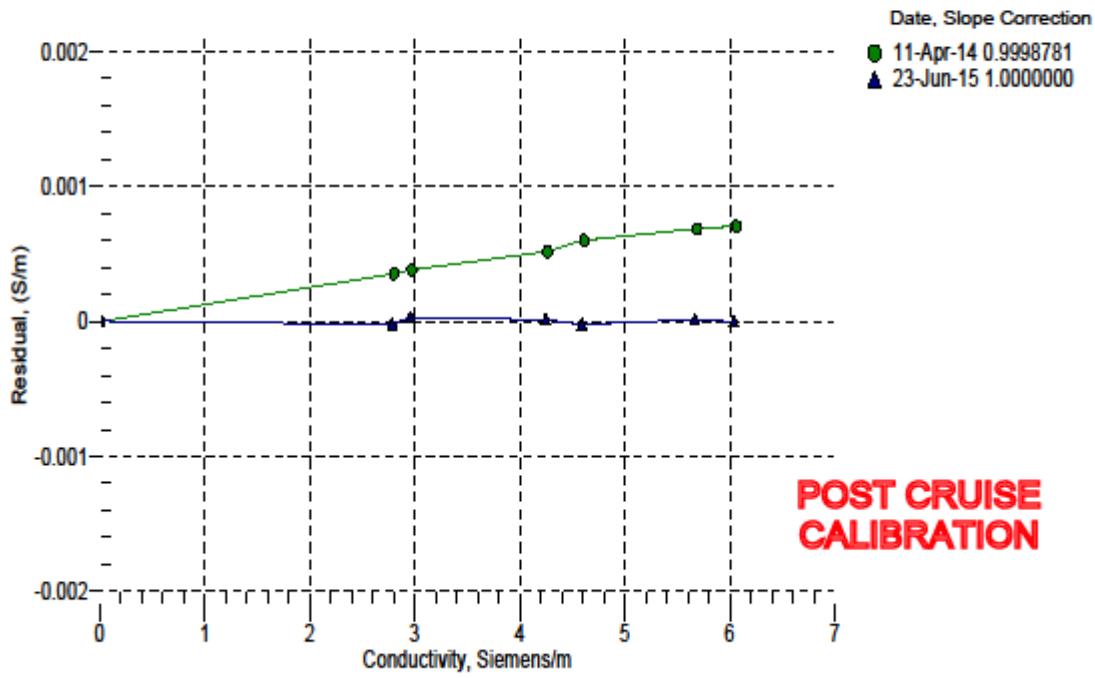

.... 62

Secondary Conductivity..... 63

Sea-Bird Electronics, Inc.

13431 NE 20th Street, Bellevue, WA 98005-2010 USA

Phone: (+1) 425-643-9866 Fax (+1) 425-643-9954 Email: seabird@seabird.com

SENSOR SERIAL NUMBER: 2247
CALIBRATION DATE: 23-Apr-15

SBE 4 CONDUCTIVITY CALIBRATION DATA
PSS 1978: C(35,15,0) = 4.2914 Siemens/meter

COEFFICIENTS:

| | |
|----------------------|--------------------------------|
| g = -1.03559824e+001 | CPCor = -9.5700e-008 (nominal) |
| h = 1.37305452e+000 | CTcor = 3.2500e-006 (nominal) |
| i = -1.90407591e-003 | |
| j = 2.02896049e-004 | |


| BATH TEMP (ITS-90) | BATH SAL (PSU) | BATH COND (Siemens/m) | INST FREQ (kHz) | INST COND (Siemens/m) | RESIDUAL (Siemens/m) |
|-----------------------|-------------------|--------------------------|--------------------|--------------------------|-------------------------|
| 0.0000 | 0.0000 | 0.00000 | 2.75003 | 0.00000 | 0.00000 |
| -1.0000 | 34.4896 | 2.78070 | 5.28047 | 2.78069 | -0.00001 |
| 1.0000 | 34.4900 | 2.95072 | 5.39678 | 2.95073 | 0.00001 |
| 15.0000 | 34.4906 | 4.23586 | 6.20533 | 4.23589 | 0.00002 |
| 18.5000 | 34.4910 | 4.57985 | 6.40430 | 4.57983 | -0.00002 |
| 29.0000 | 34.4883 | 5.65461 | 6.98925 | 5.65460 | -0.00001 |
| 32.5001 | 34.4797 | 6.02391 | 7.17913 | 6.02392 | 0.00001 |

$$f = \text{INST FREQ} / 1000.0$$

$$\text{Conductivity} = (g + h * f^2 + i * f^3 + j * f^4) / (1 + \delta * t + e * p) \text{ Siemens / meter}$$

t = temperatur e[°C]; p = pressure[decibars]; δ = CTcor; e = CPCor;

Residual = instrument conductivity - bath conductivity

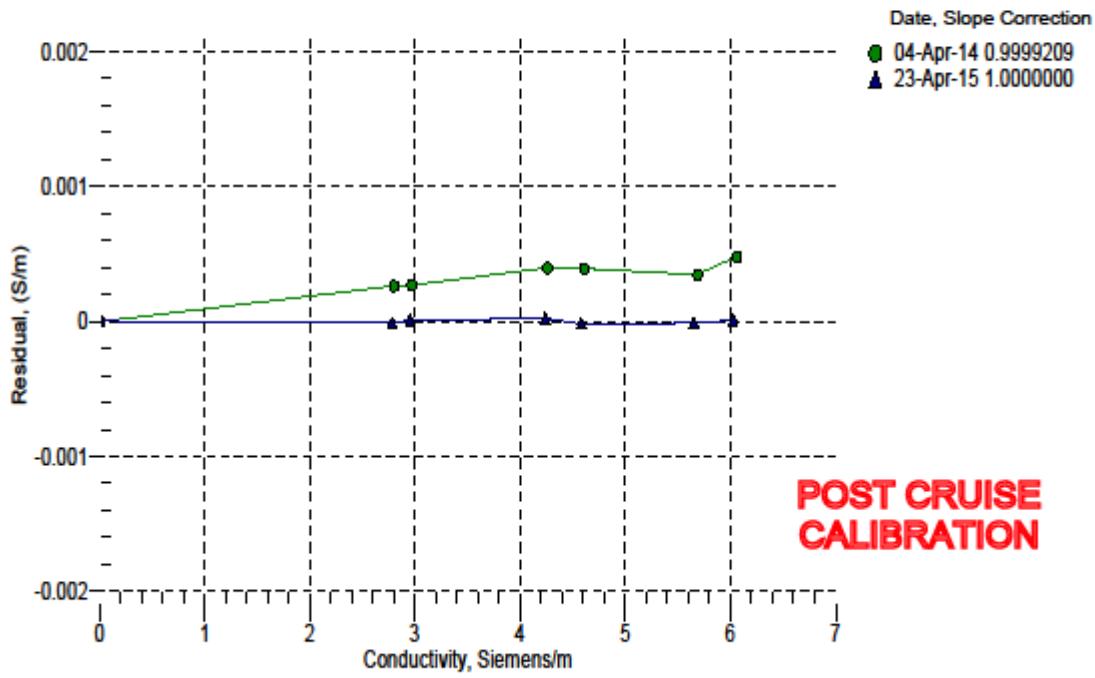

Primary..... 63

Dissolved Oxygen 64

Sea-Bird Electronics, Inc.

13431 NE 20th Street, Bellevue, WA 98005-2010 USA

Phone: (+1) 425-643-9866 Fax (+1) 425-643-9954 Email: seabird@seabird.com

SENSOR SERIAL NUMBER: 0179
CALIBRATION DATE: 02-Aug-16

SBE 43 OXYGEN CALIBRATION DATA

| | | |
|---------------------|---------------------|---------------------------------------|
| COEFFICIENTS: | $A = -1.1894e-002$ | NOMINAL DYNAMIC COEFFICIENTS |
| $Soc = 0.4534$ | $B = 4.8150e-004$ | $D1 = 1.92634e-4$ $H1 = -3.300000e-2$ |
| $Voffset = -0.4929$ | $C = -4.7233e-006$ | $D2 = -4.64803e-2$ $H2 = 5.000000e+3$ |
| $Tau20 = 1.10$ | $E nominal = 0.036$ | $H3 = 1.45000e+3$ |


| BATH OXYGEN (ml/l) | BATH TEMPERATURE (* C) | BATH SALINITY (PSU) | INSTRUMENT OUTPUT (volts) | INSTRUMENT OXYGEN (mM) | RESIDUAL (ml/l) |
|-----------------------|---------------------------|------------------------|------------------------------|---------------------------|--------------------|
| 1.12 | 6.00 | 0.00 | 0.791 | 1.11 | -0.00 |
| 1.13 | 12.00 | 0.00 | 0.851 | 1.12 | -0.00 |
| 1.14 | 2.00 | 0.00 | 0.757 | 1.13 | -0.01 |
| 1.16 | 26.00 | 0.00 | 0.974 | 1.16 | -0.00 |
| 1.16 | 20.00 | 0.00 | 0.930 | 1.16 | -0.00 |
| 1.17 | 30.00 | 0.00 | 1.007 | 1.17 | 0.00 |
| 3.86 | 12.00 | 0.00 | 1.724 | 3.87 | 0.00 |
| 3.87 | 2.00 | 0.00 | 1.397 | 3.88 | 0.01 |
| 3.88 | 20.00 | 0.00 | 1.962 | 3.88 | 0.00 |
| 3.88 | 30.00 | 0.00 | 2.203 | 3.89 | 0.01 |
| 3.89 | 26.00 | 0.00 | 2.114 | 3.89 | 0.01 |
| 3.89 | 6.00 | 0.00 | 1.536 | 3.89 | 0.00 |
| 6.60 | 30.00 | 0.00 | 3.389 | 6.59 | -0.01 |
| 6.60 | 6.00 | 0.00 | 2.261 | 6.60 | -0.00 |
| 6.61 | 2.00 | 0.00 | 2.032 | 6.61 | -0.00 |
| 6.61 | 12.00 | 0.00 | 2.599 | 6.61 | 0.00 |
| 6.62 | 20.00 | 0.00 | 2.993 | 6.61 | -0.00 |
| 6.62 | 26.00 | 0.00 | 3.248 | 6.62 | -0.00 |

V = instrument output (volts); T = temperature ($^{\circ}$ C); S = salinity (PSU); K = temperature ($^{\circ}$ K)

$Oxsol(T,S)$ = oxygen saturation (ml/l); P = pressure (dbar)

$Oxygen (ml/l) = Soc * (V + Voffset) * (1.0 + A * T + B * T^2 + C * T^3) * Oxsol(T,S) * \exp(E * P / K)$

Residual (ml/l) = instrument oxygen - bath oxygen

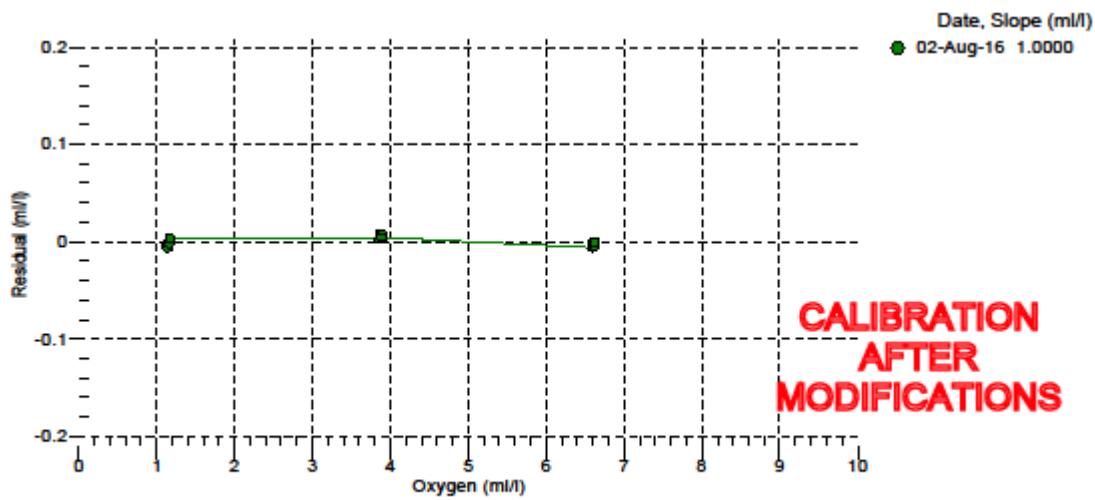

.... 64

Secondary Dissolved Oxygen 65

Sea-Bird Electronics, Inc.

13431 NE 20th Street, Bellevue, WA 98005-2010 USA

Phone: (+1) 425-643-9866 Fax (+1) 425-643-9954 Email: seabird@seabird.com

SENSOR SERIAL NUMBER: 0181
CALIBRATION DATE: 27-Apr-16

SBE 43 OXYGEN CALIBRATION DATA

| | | |
|---------------------|---------------------|---------------------------------------|
| COEFFICIENTS: | $A = -3.8157e-003$ | NOMINAL DYNAMIC COEFFICIENTS |
| $Soc = 0.4990$ | $B = 1.8573e-004$ | $D1 = 1.92634e-4$ $H1 = -3.300000e-2$ |
| $Voffset = -0.5068$ | $C = -2.4943e-006$ | $D2 = -4.64803e-2$ $H2 = 5.000000e+3$ |
| $Tau20 = 1.11$ | $E nominal = 0.036$ | $H3 = 1.45000e+3$ |


| BATH OXYGEN (ml/l) | BATH TEMPERATURE (*C) | BATH SALINITY (PSU) | INSTRUMENT OUTPUT (volts) | INSTRUMENT OXYGEN (ml/l) | RESIDUAL (ml/l) |
|-----------------------|--------------------------|------------------------|------------------------------|-----------------------------|--------------------|
| 1.13 | 6.00 | 0.00 | 0.771 | 1.13 | -0.00 |
| 1.13 | 12.00 | 0.00 | 0.816 | 1.13 | -0.00 |
| 1.15 | 2.00 | 0.00 | 0.745 | 1.14 | -0.00 |
| 1.15 | 26.00 | 0.00 | 0.924 | 1.15 | 0.00 |
| 1.15 | 20.00 | 0.00 | 0.882 | 1.15 | -0.00 |
| 1.16 | 30.00 | 0.00 | 0.962 | 1.16 | 0.00 |
| 3.88 | 30.00 | 0.00 | 2.030 | 3.89 | 0.01 |
| 3.89 | 6.00 | 0.00 | 1.418 | 3.89 | 0.00 |
| 3.90 | 12.00 | 0.00 | 1.571 | 3.90 | 0.00 |
| 3.90 | 20.00 | 0.00 | 1.775 | 3.91 | 0.00 |
| 3.91 | 2.00 | 0.00 | 1.323 | 3.91 | 0.00 |
| 3.91 | 26.00 | 0.00 | 1.935 | 3.92 | 0.01 |
| 6.65 | 26.00 | 0.00 | 2.926 | 6.64 | -0.01 |
| 6.65 | 30.00 | 0.00 | 3.110 | 6.65 | -0.00 |
| 6.67 | 12.00 | 0.00 | 2.327 | 6.67 | -0.00 |
| 6.69 | 2.00 | 0.00 | 1.901 | 6.69 | -0.00 |
| 6.69 | 6.00 | 0.00 | 2.074 | 6.69 | 0.00 |
| 6.70 | 20.00 | 0.00 | 2.681 | 6.70 | 0.00 |

V = instrument output (volts); T = temperature (*C); S = salinity (PSU); K = temperature (*K)

Oxsol(T,S) = oxygen saturation (ml/l); P = pressure (dbar)

Oxygen (ml/l) = Soc * (V + Voffset) * (1.0 + A * T + B * T² + C * T³) * Oxsol(T,S) * exp(E * P / K)

Residual (ml/l) = instrument oxygen - bath oxygen

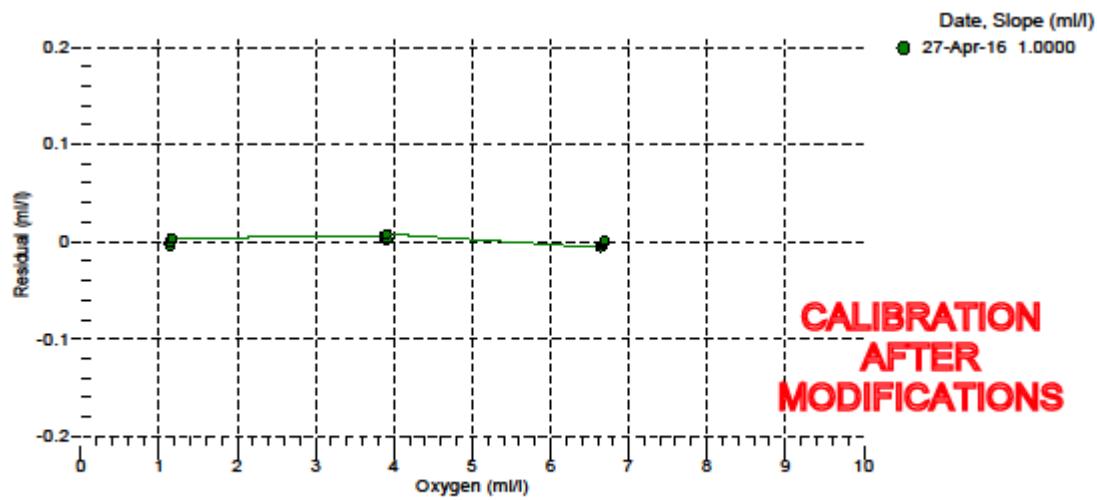

.... 65

Fluorometer 66

PO Box 518
620 Applegate St.
Philomath, OR 97370



(541) 929-5650
Fax (541) 929-5277
www.wetlabs.com

ECO Chlorophyll Fluorometer Characterization Sheet

Date: 6/18/2015

S/N: FLRTD-398

Chlorophyll concentration expressed in $\mu\text{g/l}$ can be derived using the equation:

$$\text{CHL } (\mu\text{g/l}) = \text{Scale Factor} * (\text{Output} - \text{Dark Counts})$$

| | Analog Range 1 | Analog Range 2 | Analog Range 4 (default) | Digital |
|-------------------|-------------------|-------------------|--------------------------------|-------------------------------------|
| Dark Counts | 0.099 | 0.055 | 0.032 V | 73 counts |
| Scale Factor (SF) | 6 | 13 | 26 $\mu\text{g/l}/\text{V}$ | 0.0079 $\mu\text{g/l}/\text{count}$ |
| Maximum Output | 4.96 | 4.96 | 4.96 V | 16328 counts |
| Resolution | 0.8 | 0.8 | 0.8 mV | 1.0 counts |

Ambient temperature during characterization 22.3 °C

Analog Range: 1 (most sensitive, 0–4,000 counts), 2 (midrange, 0–8,000 counts), 4 (entire range, 0–16,000 counts).

Dark Counts: Signal output of the meter in clean water with black tape over detector.

SF: Determined using the following equation: SF = x ÷ (output - dark counts), where x is the concentration of the solution used during instrument characterization. SF is used to derive instrument output concentration from the raw signal output of the fluorometer.

Maximum Output: Maximum signal output the fluorometer is capable of.

Resolution: Standard deviation of 1 minute of collected data.

The relationship between fluorescence and chlorophyll-a concentrations *In-situ* is highly variable. The scale factor listed on this document was determined using a mono-culture of phytoplankton (*Thalassiosira weissflogii*). The population was assumed to be reasonably healthy and the concentration was determined by using the absorption method. To accurately determine chlorophyll concentration using a fluorometer, you must perform secondary measurements on the populations of interest. This is typically done using extraction-based measurement techniques on discrete samples. For additional information on determining chlorophyll concentration see "Standard Methods for the Examination of Water and Wastewater" part 10200 H, published jointly by the American Public Health Association, American Water Works Association, and the Water Environment Federation.

FLRTD-398

Revision J

3/17/08

..... 66

PAR..... 67

Biospherical Instruments Inc

CALIBRATION CERTIFICATE

UNDERWATER PAR SENSOR WITH LOG AMPLIFIER

| | | | | | | | | | |
|--|--|--|--------------------------------|--------------------------------|-----------------------|---------------|-----------------------|---|----------|
| Calibration Date: | 02/17/15 | Job No.: | R12167 | | | | | | |
| Model Number: | QSP2300 | | | | | | | | |
| Serial Number: | 4722 | | | | | | | | |
| Operator: | TPC | | | | | | | | |
| Standard Lamp: | V-033(3712) | | | | | | | | |
| Operating Voltage Range: | 6 | to | 15 VDC (+) | | | | | | |
| Note: The QSP2300 uses a log amplifier to measure the detector signal current with $V = \log I / (Amps) / I_{Ref}$ | | | | | | | | | |
| To calculate irradiance, use this formula: Irradiance = Calibration factor * (10^Light Signal Voltage - 10^Dark Voltage) | | | | | | | | | |
| With the appropriate (solar corrected) Irradiance Calibration Factor: | | | | | | | | | |
| Dry Calibration Factor: | 2.50E+13 quanta/cm ² .sec."/amps" | 4.15E-05 μ Einstens/cm ² .sec."/amps" | | | | | | | |
| Wet Calibration Factor: | 4.41E+13 quanta/cm ² .sec."/amps" | 7.32E-06 μ Einstens/cm ² .sec."/amps" | | | | | | | |
| Sensor Test Data and Results^{a)} | | | | | | | | | |
| Sensor Supply Current (Dark): | 85.4 mA | | | | | | | | |
| Supply Voltage: | 6 Volts | | | | | | | | |
| Lamp Integrated PAR Irradiance: | 9.34E+15 quanta/cm ² sec | 0.01551 μ Einstens/cm ² sec | | | | | | | |
| SC3 Immersion Coefficient: | 0.5664 | Scalar Correction: | 1 PAR Solar Correction: 1.0000 | | | | | | |
| Nominal Filter OD | Calibrated Trans. | Measured Sensor Trans. | Measured Signal (Amps) | Estimated Signal (Amps) | C.a.c. Output (Volts) | Error (Volts) | Test Irrad. Error (%) | Test Irrad. (quanta/cm ² .sec) | |
| No Filter | 100.00% | 2.575 | 100.00% | 3.76E-08 | 3.76E-08 | 2.577 | 0.002 | 0.0 | 9.34E+15 |
| 0.3 | 36.10% | 2.138 | 36.27% | 1.36E-08 | 1.36E-08 | 2.137 | 0.000 | -0.5 | 3.39E+15 |
| 0.5 | 27.80% | 2.023 | 27.77% | 1.04E-08 | 1.04E-08 | 2.022 | -0.001 | -0.6 | 2.59E+15 |
| 1 | 9.27% | 1.564 | 9.37% | 3.52E-09 | 3.48E-09 | 1.561 | -0.003 | -1.1 | 8.76E+14 |
| 2 | 1.11% | 0.782 | 1.12% | 4.22E-10 | 4.17E-10 | 0.760 | -0.002 | -1.2 | 1.05E+14 |
| 3 | 0.05% | 0.270 | 0.07% | 2.81E-11 | 2.01E-11 | 0.251 | -0.019 | -28.7 | 6.99E+12 |
| Dark Before: | 0.199 Volts | | | | | | | | |
| Light - No Filter Hdr.: | 2.575 Volts | | | $I_{Ref} = 1.00E-10$ Amps | | | | | |
| Dark After - NFH: | 0.199 Volts | | | $I_{Dark} = 1.58E-10$ Amps | | RG780 0.2196 | | | |
| Average Dark | 0.199 Volts | | | $10^{V_{USM}} = 1.581248$ Amps | | | | | |
| Notes: 1. Annual calibration is recommended. 2. The collector should be cleaned frequently with alcohol. 4) This section is for internal use and for more advanced analysis | | | | | | | | | |

QSP200L-QSP2300 (4-2013-).xls

.... 67

Acquisition and Processing Information 68

ERRORS AND EVENTS 68

Introduction

The LMG data acquisition systems continuously log data from a suite of instrumentation throughout the cruise. This document describes:

- The structure and organization of the data on the distribution media
- The format and contents of the data strings
- Formulas for calculating values
- Information about the specific instruments in use during the cruise
- A log of acquisition problems and events during the cruise that may affect the data
- Scanned calibration sheets for the instruments in use during the cruise.

All the data has been archived using ‘tar’ and compressed using ‘gzip’, identified by the ‘.gz’ extension. Tools are available on all platforms for uncompressing and de-archiving these formats: On Macintosh use the built-in Archive Utility, or tar in the terminal. On Windows operating systems use WinZip or 7Zip.

IMPORTANT: Read the last section, “Acquisition Problems and Events,” for important information that may affect the processing of this data.

Archive Data Extraction

It is often useful to know exactly how an archive was produced when expanding its contents. Tar files were created using the following commands:

```
tar cvf archive-file files-to-be-archived
```

To create a list of the files in the archive:

```
tar tvf archive-file > contents.list
```

To extract the files from the archive:

```
tar xvf archive-file file(s)-to-extract
```

G-zipped files will have a “.gz” extension on the filename. These files can be decompressed after de-archiving, using:

```
gunzip filename.gz
```

Distribution Contents

ADCP data (/ADCP)

This directory contains a tar file of the ADCP system's "proc" directory, which contains a database of the averaged ping data, Matlab m-files used in processing the data, and daily graphs of the currents. For more information contact Teri Chereskin at tchereskin@ucsd.edu .

Data collection parameters (/CAL)

Refer to the InstCoef.txt file along with the specific instrument calibration sheets in this report for information on how the RVDAS data was collected and processed.

Imagery (/Imagery)

This directory contains things such as ice imagery, isobar charts, sat imagery, wave and wind images, and weather reports.

Maps (/Maps)

This directory maps and mapping data generated by the ship's MCIS and automated scripts, plus any maps provided for this purpose by the on-board science party.

Ocean data (/ocean)

XBT Data (/Ocean/XBT)

Contains two zip archives of XBT data generated for the Drake Transect by NOAA standard "AMVERSEAS" software.

XCTD Data (/Ocean/XCTD)

Expendable Conductivity, Temperature, and Depth (XCTD) digital probes were used to obtain water column temperature and Salinity profiles. The two files were created for each drop .RDF files contain the raw data, and the .EDF contain the exported ascii data.

CTD Data (/Ocean/CTD)

This directory contains the directory structure copied over from the CTD computer, and includes subdirectories for graphs, software configuration files, processing scripts, calibration files, raw data, and processed data.

Automatically processed data (/process)

Contains automatically processed datasets and QC graphs produced by the RVDAS system

QC Plots (/process/QC.tar)

Postscript files of data stored each day on RVDAS for quality control analysis during the cruise. There are 3 types of files, named metXXX.ps, navXXX.ps, and oceanXXX.ps, where XXX is represents the Julian day. Met files are a summary of the data from the meteorological instruments, Nav files are a summary of navigational data, and Ocean files are a summary of the underway seawater and bathymetry data.

Reports (/Report)

Copies of this report in MS Word and pdf formats, and scanned copies of logsheets provided by various science groups.

Instrument data (/rvdas)

Contains data collected by the suite of standard instruments on the LMG. This data is detailed later in the report

Utility programs (/Utility)

Contains utility programs to access the data on the distribution.

JGOFS Data Set

/Process/JGOF/

The JGOFS data set consists of a single file produced each day named jg<julian_day>.dat.gz where <julian_day> is the day the data was acquired. The “.gz” extension indicates that the individual files are compressed before archiving. The daily file consists of 22 separate columnar fields in text format, which are described below. The JGOFS data set is obtained primarily by applying calibrations to raw data and decimating to whole minute intervals. However, several fields are derived measurements from more than a single raw input. *Note: Null, unused, or unknown fields are filled with 9's in the JGOFS data.*

Additionally, 3 separate QC plots are generated daily by the ET using the JGOFS data set. These plots include TSG and Bathymetry data, meteorological data, and navigation data. The files are called ocean<julian_day>.ps, met<julian_day>.ps, and nav<julian_day>.ps respectively.

| Field | Data | Units |
|-------|--|-------------------------------------|
| 01 | GMT Date | dd/mm/yy |
| 02 | GMT Time | hh:mm:ss |
| 03 | Seapath Latitude (negative is South) | tt.tttt |
| 04 | Seapath Longitude (negative is West) | ggg.gggg |
| 05 | Speed Over Ground | knots |
| 06 | GPS HDOP | - |
| 07 | Gyro Heading | Degrees (azimuth) |
| 08 | Course Made Good | Degrees (azimuth) |
| 09 | Mast PAR | μ Einstein's/meter ² |
| 10 | Sea Surface Temperature | °C |
| 11 | Sea Surface Conductivity | siemens/meter |
| 12 | Sea Surface Salinity | PSU |
| 13 | Sea Depth (uncorrected, calc. sw soud vel. 1500 m/s) | meters |
| 14 | True Wind Speed (max speed windbird) | meters/sec |
| 15 | True Wind Direction (max speed windbird) | degrees (azimuth) |
| 16 | Ambient Air Temperature | °C |
| 17 | Relative Humidity | % |
| 18 | Barometric Pressure | mBars |
| 19 | Sea Surface Fluorometry | μ g/l |
| 20 | Transmissometry | % |
| 21 | PSP | W/m ² |
| 22 | PIR | W/m ² |

pCO₂-merged Data Set

/Process/PCO2/

```
00+346:23:58:20.672 2000346.9991 2398.4 1008.4 0.01 45.4 350.3 342.6 15.77 Equil -43.6826
173.1997 15.51 33.90 0.33 5.28 9.05 1007.57 40.0 14.87 182.44 -1
```

Field Data

| Field | Data | Format | Unit |
|-------|--|---------------------|----------------------|
| 1 | RVDAS time tag | yy+ddd:hh:mm:ss.sss | UTC |
| 2 | pCO ₂ time tag* | yyyyddd.ttt | UTC |
| 3 | Raw Voltage (IR) | xxxx.xx | mV |
| 4 | Cell Temperature | xx.xx | °C |
| 5 | pCO ₂ system internal Barometer | xxx.xx | mBar |
| 6 | Flowrate | xxx.xx | cm ³ /min |
| 7 | VCO ₂ Concentration | xxx.xx | µAtm |
| 8 | pCO ₂ Pressure | xx.xx | ppm |
| 9 | Equilibrator Temperature, RTD | xx.xx | °C |
| 10 | Equilibrator Temperature, SBE38 | xx.xx | °C |
| 11 | Valve Position | xx | numeric |
| 12 | Gas Flow Source (Equil = pCO ₂ measurement) | | text |
| 13 | Latitude | xx.x | degrees |
| 14 | Longitude | xxx.xxxxx | degrees |
| 15 | Sea Water Intake Temperature | xx.xxx | °C |
| 16 | Sea Surface Salinity | xx.xxx | PSU |
| 17 | Sea Surface Fluorometry | x.xxx | mg/m ³ |
| 18 | True Wind Speed | x.xx | m/s |
| 19 | True Wind Direction | x.xx | degrees |
| 20 | Barometric Pressure | xxx.xx | mBar |
| 21 | Hydro-Lab H ₂ O Flow Rate | xxx.x | Raw counts |
| 22 | Speed over Ground | x.xx | knots |
| 23 | Course Made Good | xx.xx | degrees |
| 24 | Oxygen | XXX.XX | µm/kg |
| 25 | TSG2 Internal Temperature | x.xx | °C |
| 26 | TSG2 Salinity | xx.xx | PSU |
| 27 | TSG1 Internal Temperature | x.xx | °C |

RVDAS

/RVDAS/

RVDAS (Research Vessel Data Acquisition System) was developed at Lamont-Doherty Earth Observatory of Columbia University and was used on the R/V Maurice Ewing for many years. It was modified extensively for use on the Nathaniel B. Palmer and her sister ship, the R/V Laurence M. Gould.

Daily data processing of the RVDAS data is performed to calibrate and convert values into useable units and as a quality-control on operation of the DAS. Raw and processed data sets from RVDAS are included in the data distribution. The tables below provide detailed information on the sensors and data. Be sure to read the “Significant Acquisition Events” section for important information about data acquisition during this cruise.

Sensors and Instruments

RVDAS data is divided into two general categories, *underway and navigation*. They can be found on the distribution media as subdirectories under the top level rvdas directory: /rvdas/uw, and /rvdas/nav. Processed oceanographic data is in the top level directory, /process. Each instrument or sensor produces a data file named with its channel ID. Each data file is g-zipped to save space on the distribution media. Not all data types are collected every day or on every cruise.

The naming convention for data files produced by the sensors and instruments is

LMG [CruiseID] [ChannelID].dDDD

Example: LMG16031mwx.d025

- The CruiseID is the numeric name of the cruise, in this case, 16031.
- The ChannelID is a 4-character code representing the system being logged. An example is “mwx1,” the designation for meteorology.
- DDD is the day of year the data was collected

Underway Sensors

Meteorological Data

| Measurement | String ID | Collection Status | Rate | Instrument |
|------------------------|----------------|-------------------|-------|-----------------------------------|
| Air Temperature | lmwx (met) | Continuous | 1/sec | RM Young 41372LC |
| Relative Humidity | lmwx (met) | Continuous | 1/sec | RM Young 41372LC |
| Wind Speed / Direction | lmwx (pus,sus) | Continuous | 1/sec | Gill Instruments 1390-PK-062 |
| Barometer | lmwx (met) | Continuous | 1/sec | Vaisala PTB210B |
| PAR | lmwx (met) | Continuous | 1/sec | Biospherical Instruments QSR-240 |
| PIR | lmwx (met) | Continuous | 1/sec | Eppley PIR |
| PSP | lmwx (met) | Continuous | 1/sec | Eppley PSP |
| GUV | lguv | Continuous | 2/sec | Biospherical Instruments GUV-2511 |
| Oxygen | lgo2 | Continuous | 1/min | UCAR Oxygen system |

Navigational Data

| Measurement | String ID | Collection Status | Rate | Instrument |
|-------------|-----------|-------------------|-------|--------------------------|
| Gyroscope | lgyr | Continuous | 5/sec | Meridian Bridgemate Gyro |
| Seapath GPS | lsep | Continuous | 1/sec | Seapath 330 |
| Garmin GPS | lgar | Continuous | 1/sec | Garmin 19 |
| AIS | lais | Continuous | var | Standard Horizon GX2150 |

Geophysical Data

| Measurement | String ID | Collection Status | Rate | Instrument |
|---------------|-----------|-------------------|--------|--------------------|
| Bathymetry | lknu | Variable | Varies | Knudsen Chirp 3260 |
| Dush-11 Winch | lwn1 | Variable | 20/sec | Markey DUSH-11 |
| Dush-5 Winch | lwn1 | Variable | 20/sec | Markey DUSH-5 |
| Dush-4 Winch | lwn1 | Variable | 20/sec | Markey DUSH-4 |

Oceanographic Data

| Measurement | String ID | Collection Status | Rate | Instrument |
|-------------------------|-----------|-------------------|---------|------------------------------|
| Salinity | utsg | Continuous | 3 sec | Seabird-45 |
| Salinity (secondary) | tsg2 | Continuous | 3 sec | Seabird-45 |
| Sea Surface Temperature | lrtm | Continuous | 1 sec | Seabird-38 |
| Fluorometry | ldfl | Continuous | 1 sec | WetLabs ECO |
| ADCP, Speed Log | ladc | Continuous | 1 sec | RD Instruments Workhorse 150 |
| Dissolved Oxygen | loxy | Continuous | 1 sec | Anderaa Optode |
| pCO ₂ | lpco2 | Continuous | 2.5 min | PCO2 System |

Data File Names and Structures

RVDAS data is divided into two broad categories, ***Underway*** and ***Navigation***. The groups are abbreviated “uw” and “nav”. Thus, these two tar files, Imgwu.tar and Imgnav.tar exist under the top-level rvdas directory. The instruments are broken down as shown. Each data file is g-zipped to save space on the distribution. Not all data types are collected every day or on every cruise.

RVDAS data files are named following the convention: LMG[FileID].dDDD.

- The FileID is a 4-character code representing the system being logged, for example: lmet (for meteorology)
- DDD is the Julian day of the data collection

| Underway Data | File ID | Navigation Data | File ID |
|-------------------------|---------|-----------------|---------|
| Meteorological | lmwx | Gyro Compass | lgry |
| Knudsen | lknu | Garmin GPS | lgar |
| microTSG | utsg | Seapath GPS | lsep |
| Sea Surface Temperature | lrtm | AIS | lais |
| Fluorometer | ldfl | | |
| ADCP | ldfl | | |
| Sound Velocity Probe | lsvp | | |
| GUV & PUV | lguv | | |
| PCO2 system | lpco | | |
| Dissolved Oxygen | loxy | | |
| Sea Water Wall | lsea | | |
| Winches | lwn1 | | |
| Net Depth Sensor | lnds | | |

Data is received by the RVDAS system via RS-232 serial connections. The data files that comprise the rvdas data set are described below. A time tag is added to each line of data received and the data is written to disk.

YY+DDD:HH:MM:SS.SSS [data stream from instrument]

Where, YY: two-digit year, DDD: Julian Day, HH: 2 digit hours, MM: 2 digit minutes SS.SSS: seconds. All times are UTC.

The delimiters used to separate fields in the raw data files are usually spaces and commas, but other delimiters are used (:, =, @) and occasionally there is no delimiter. Care should be taken when reprocessing the data that the field separations are clearly understood. Example data strings of the loggers follow.

lknu - Knudsen Chirp 3260 Sonar

14+002:19:07:04.648 3.5kHz, 4000.92, 1, 12.0kHz, 4001.12, 1, 1500, -57.343073, -63.750720

| Field | Data | Format | Unit |
|-------|---------------------------------|---------------------|---------|
| 1 | RVDAS time tag | yy+ddd:hh:mm:ss.sss | UTC |
| 2 | 3.5kHz = Low frequency in use | text | 3.5kHz |
| 3 | Low Frequency Depth | xxxx.xx | m |
| 4 | Valid Flag | x | 0 or 1 |
| 5 | 12.0kHz = High frequency in use | text | 12.0kHz |
| 6 | High Frequency Depth | xxxx.xx | m |
| 7 | Valid Flag | x | 0 or 1 |
| 8 | Latitude | xx.XXXXXX | degrees |
| 9 | Longitude | xx.XXXXXX | degrees |

lwn1 - Winches

16+093:16:55:49.561 -01RD,2016-04-02T12:38:50.854,DUSH11,-0000233,00000000,000000.0,3275

| Field | Data | Format | Unit |
|-------|-----------------------------------|---------------------|--------------|
| 1 | RVDAS time tag | yy+ddd:hh:mm:ss.sss | UTC |
| 2 | Record Identifier, RD=Remote Data | | alphanumeric |
| 3 | LCI-90i Date and Time | yyyy-mm-ddThh:mm:ss | |
| 4 | Winch Identifier | | text |
| 5 | Winch Name | | alphabetical |
| 6 | Tension | xxxxxxxx | lbs |
| 7 | Speed | xxxxx.x | m/min |
| 8 | Payout | xxxxx.x | m |
| 9 | Checksum | x.xxxx | numeric |

lmwx - Campbell Meteorological DAS

08+034:13:52:14.454 MET,12.22322,44.25706,-75,-25,-363.6365,2.332982,-0.08215196,278.6845,
279.2192,854.6198

| Field | Data | Format | Unit |
|-------|---|---------------------|------|
| 1 | RVDAS time tag | yy+ddd:hh:mm:ss.sss | UTC |
| 2 | MET Flag | | |
| 3 | Power Supply Voltage | vv.v | V |
| 4 | Enclosure Relative Humidity (not implemented) | xx.x | % |
| 5 | Air Temperature, Celsius | xx.x | °C |
| 6 | Air Relative Humidity | xx.x | % |
| 7 | PAR (Photosynthetically Available Radiation) | xxx.xxxx | mV |
| 8 | PSP (Shortwave Radiation) | x.xxxxxx | mV |
| 9 | PIR Thermopile (Longwave Radiation) | x.xxxxxx | mV |
| 10 | PIR Case Temperature | xxx.xxxx | °K |
| 11 | PIR Dome Temperature | xxx.xxxx | °K |
| 12 | Barometer | xxx.xxxx | mBar |

08+034:13:52:14.216 PUS,A,356,002.15,M,+332.28,+000.97,60,08

08+034:13:52:14.216 SUS,A,356,002.15,M,+332.28,+000.97,60,08

| Field | Data | Format | Unit |
|-------|-------------------------------------|---------------------|--------------|
| 1 | RVDAS time tag | yy+ddd:hh:mm:ss.sss | UTC |
| 2 | Identifier (PUS = port, SUS = stbd) | xxx | Text |
| 3 | A | x | A |
| 4 | Port Wind Relative Direction | xxx | degrees |
| 5 | Port Wind Relative Speed | xxx.xx | m/s |
| 6 | M = Meters (for previous) | x | M |
| 7 | Sound Speed | xxx.xx | m/s |
| 8 | Sonic Temperature | xxx.xx | °C |
| 9 | Unit Status | xx | numeric |
| 10 | Checksum | xx | alphanumeric |

lguv - Biospherical GUV

08+037:14:17:59.211 020608 141758 -.000099 1.307E0 7.24E0 1.316E1 2.609E1 3.285E1 3.505E1
 8.075E-2 38.993 17.985

| Field | Data | Units |
|-------|-------------------|------------------------|
| 1 | RVDAS time tag | yy+ddd:hh:mm:ss.sss |
| 2 | GUV Computer date | mmddyy |
| 3 | GUV Computer Time | hhmmss |
| 4 | Ed0Gnd | Volts |
| 5 | Ed0305 | µW/cm ² nm |
| 6 | Ed0313 | µW/cm ² nm |
| 7 | Ed0320 | µW/cm ² nm |
| 8 | Ed0340 | µW/cm ² nm |
| 9 | Ed0380 | µW/cm ² nm |
| 10 | Ed0395 | µW/cm ² nm |
| 11 | Ed0PAR | µE/cm ² sec |
| 12 | Ed0Temp | °C |
| 13 | Ed0Vin | Volts |

Isea - wet wall flows, transmissometer

12+004:12:01:04.438 WetLab_1,14.1,XMISS,3.098,V,0.000,0.000,0.000,-928.535,-
220.566,0.000,0.000,T,NAN,NAN,NAN,P,0,0,F,47.91811,0,6.815308,0,0,0,0,I,1,1,1,1

| Field | Data | Unit |
|-------|--|--------|
| 1 | RVDAS time tag | UTC |
| 2 | WetLab_1 | Text |
| 3 | Internal Temperature | °C |
| 4 | XMISS | Text |
| 5 | Transmissometer Reading | volts |
| 6 | V | Text |
| 7 | High precision voltage #1 | V |
| 8 | High precision voltage #2 | V |
| 9 | High precision voltage #3 | V |
| 10 | Standard precision voltage #1 (historically used for YoYo Cam xmiss) | V |
| 11 | Standard precision voltage #2 (historically used for YoYo Cam altimeter) | V |
| 12 | Standard precision voltage #3 | V |
| 13 | Standard precision voltage #4 | V |
| 14 | T | Text |
| 15 | Temperature Probe 1 | °C |
| 16 | Temperature Probe 2 | °C |
| 17 | Temperature Probe 3 | °C |
| 18 | Temperature Probe 4 | °C |
| 19 | P | Text |
| 20 | Pulse Counter 1 | counts |
| 21 | Pulse Counter 2 | counts |
| 22 | F | Text |
| 23 | Flow Counter #1 | counts |
| 24 | Flow Counter #2 | counts |
| 25 | Flow Counter #3 | counts |
| 26 | Flow Counter #4 | counts |
| 27 | Flow Counter #5 | counts |
| 28 | Flow Counter #6 | counts |
| 29 | Flow Counter #7 | counts |
| 30 | Flow Counter #8 | counts |
| 31 | I | Text |
| 32 | Digital Input #1 | 1 or 0 |
| 33 | Digital Input #2 | 1 or 0 |
| 34 | Digital Input #3 | 1 or 0 |
| 35 | Digital Input #4 | 1 or 0 |

utsg - microTSG, Thermosalinograph

For further information on this data, check www.seabird.com for SBE 45 MicroTSG Thermosalinograph

08+037:13:45:57.596 2.6470, 3.03853, 33.8129, 1459.351

| Field | Data | Format | Unit |
|-------|----------------------------|---------------------|------|
| 1 | RVDAS time tag | yy+ddd:hh:mm:ss.sss | UTC |
| 2 | Internal water temperature | xx.xxxx | C |
| 3 | Conductivity | xx.xxxx | s/m |
| 4 | Salinity | xx.xxxx | PSU |
| 5 | Sound Velocity | xxxx.xxx | m/s |

lrtm - digital Remote Temperature

For further information on this data, check on www.seabird.com on SBE38 Digital Thermometer

08+037:13:47:17.841 2.2527

| Field | Data | Format | Unit |
|-------|------------------------------|---------------------|------|
| 1 | RVDAS time tag | yy+ddd:hh:mm:ss.sss | UTC |
| 2 | Temperature, Seawater Intake | xx.xxxx | C |

ldfl - Fluorometer, Wetlab ECO

08+037:13:55:08.434 99/99/99 99:99:99 0.00 2585 73 543

| Field | Data | Format | Unit |
|-------|-----------------------------|---------------------|--------|
| 1 | RVDAS time tag | yy+ddd:hh:mm:ss.sss | UTC |
| 2 | Fluorometer Date | mm/dd/yy | text |
| 3 | Fluorometer Time | hh:mm:ss | text |
| 4 | Chlorophyl Signal | x.xx | µg/l |
| 5 | Reference | xxxx | λq |
| 6 | Counts – Chlorophyll Signal | xx | counts |
| 7 | Thermistor Counts | xxxx | counts |

Igo2 - Oxygen System

For further information on this data, please contact Britt Stephens at stephens@ucar.edu

```
12+301:22:35:30.558 81300.8 16.0 32.0 000.0 005.0 1.2589631 1.2379622 744.549 111.853 131.642
-2.089 -2.448 723.594 002.50 086.43 099.74 002.77 000.97 050.65 0.000 001.19 065.59 039.48
1966.097 01.345 37.0171 37.8433 000.0 000.0 20.66 20.41 -92.0 28.66 37.44 42.33 37.80 47.95
0.0 01.88 0.0001711 0.0001712 0.0000747 0.0000725 02.657 02.678 -1 0.0000895 -043.94
```

| Field | Data |
|-------|---|
| 01 | RVDAS Time Tag |
| 02 | jsecoday - Seconds since midnight |
| 03 | jselflag - 8 bit decimal value indicated selected gases |
| 04 | jprgflag - 8 bit decimal value indicated purged gases |
| 05 | jmfccflag - 8 bit decimal value indicated mass-flow controller states |
| 06 | jgenflag - 8 bit decimal value indicated other parameters |
| 07 | jfcv1 - voltage on Fuel Cell #1 |
| 08 | jfcv2 - voltage on Fuel Cell #2 |
| 09 | jpcfcell - pressure in torr at fuel cells |
| 10 | jlico2a - CO2 in ppm in Li7000 Cell A |
| 11 | jlico2b - CO2 in ppm in Li7000 Cell B [CO2 MEASUREMENT] |
| 12 | jlih2oa - H2O in ppt in Li7000 Cell A |
| 13 | jlih2ob - H2O in ppt in Li7000 Cell B |
| 14 | jlipb - pressure in torr at Li7000 Cell B |
| 15 | flmfcset - mass-flow controller set voltage |
| 16 | jfl1 - flow in sccm on Inlet Line #1 |
| 17 | jfl2 - flow in sccm on Inlet Line #2 |
| 18 | jflt - flow in sccm on Long-Term reference cylinder |
| 19 | jflcal - flow in sccm on selected Calibration cylinder |
| 20 | jflwta - flow in sccm on selected Working Tank Cylinder |
| 21 | jvsoset - purge line voltage-sensitive orifice set voltage |
| 22 | jflpurge - flow in sccm on purge line |
| 23 | jflwtb - flow in sccm on Working Tank line through sensors |
| 24 | jflsp - flow in sccm on Span line through sensors |
| 25 | jpfridge - pressure in torr inside fridge trap |
| 26 | jtfbridge - temperature in C inside fridge trap |
| 27 | jtmpt - fuel-cell control temperature (thermistor) in C for MPT10000 |
| 28 | jtfcell - fuel-cell thermistor temperature in C |
| 29 | jtach1 - rmp of fan inside Line #1 Inlet |
| 30 | jtach2 - rmp of fan inside Line #2 Inlet |
| 31 | jtcyl1 - temperature in C from cylinder box RTD #1 |
| 32 | jtcyl2 - temperature in C from cylinder box RTD #2 |
| 33 | jtchill - temperature in C from chiller RTD |
| 34 | jtabm - temperature in C RTD near Analyzer Box electronics |
| 35 | jtomega - Analyzer Box control temperature (RTD) for Omega CNi2332 |
| 36 | jtu4ch - temperature in C inside USB4CH 24-bit A/D box |
| 37 | jtfcrtd - fuel-cell RTD temperature in C |

| | |
|----|---|
| 38 | jtirga - temperature in C inside Li7000 |
| 39 | jliflags - Li7000 status flag |
| 40 | jlirhsrc - Li7000 source/detector relative humidity |
| 41 | jsdfcv1 - standard deviation of 1-Hz Fuel Cell #1 voltage |
| 42 | jsdfcv2 - standard deviation of 1-Hz Fuel Cell #2 voltage |
| 43 | jslfcv1 - slope of 1-Hz Fuel Cell #1 voltage |
| 44 | jslfcv2 - slope of 1-Hz Fuel Cell #2 voltage |
| 45 | jsdco2a - standard deviation of 1-Hz Li7000 Cell A CO2 in ppm |
| 46 | jsdco2b - standard deviation of 1-Hz Li7000 Cell B CO2 in ppm |
| 47 | posneg - flag indicating position of fuel-cell changeover valve |
| 48 | jogdeltadiff - amplitude of 3-jog O2 difference-signal [O2 MEASUREMENT] |

loxy - Oxygen (Part of PCO2 system, separate from Oxygen System)

For further information on this data, contact Tim Newberger at tim.newberger@noaa.gov

```
04+117:23:57:23.504 MEASUREMENT      3830     380  Oxygen:      309.95      Saturation:
83.48  Temperature:    -1.35      DPhase:      33.41      BPhase:      32.22      RPhase:
          0.00      BAmp:      262.09      BPot:      163.00      RAmp:      0.00      RawTem.:
694.92
```

| Field | Data | Unit |
|-------|---|---------------|
| 1 | RVDAS time tag | UTC |
| 2 - 4 | Measurement ID, Model Number, Serial Number | text |
| 5 | Oxygen (literal text heading) | text |
| 6 | Oxygen reading | Numeric (raw) |
| 7 | Saturation (literal text heading) | text |
| 8 | Saturation reading | Numeric (raw) |
| 9 | Temperature (literal text heading) | text |
| 10 | Water Temperature | °C |
| 11 | Dphase (literal text heading) | text |
| 12 | D-phase | Numeric (raw) |
| 13 | BPhase (literal text heading) | text |
| 14 | B-phase | Numeric (raw) |
| 15 | RPhase (literal text heading) | V |
| 16 | R-phase | Numeric (raw) |
| 17 | Bamp (literal text heading) | text |
| 18 | B-amplitude | Numeric (raw) |
| 19 | Bpot (literal text heading) | text |
| 20 | Bpot | Numeric (raw) |
| 21 | Ramp (literal text heading) | text |
| 22 | R-amplitude | Numeric (raw) |
| 23 | RawTem (literal text heading) | Text |
| 24 | Raw Temperature | Numeric (raw) |

lpc0 - PCO2 system

For further information on this data, contact Tim Newberger at tim.newberger@noaa.gov

02+319:23:59:13.748 2002319.99851 7154.27 26.49 1033.6 325.79 6.74 329.3 53.76
0 Equil

| Field | Data | Unit |
|-------|--------------------------------------|-------------|
| 1 | RVDAS time tag | UTC |
| 2 | Julian date file string | Julian date |
| 3 | IR voltage reading | mV |
| 4 | Cell temperature | °C |
| 5 | Barometer | millibar |
| 6 | Gas flow | ml/min |
| 7 | VCO2 dry value | PPM |
| 8 | PCO2 wet/Delta value | PPM |
| 9 | Equilibrator temperature from RTD | °C |
| 10 | Equilibrator temperature from SBE-38 | °C |
| 11 | Solenoid position ID | number |
| 12 | Measured gas | text |

lsvp - Sound Velocity Probe in ADCP Transducer Well

NOTE: This value does not represent or reflect the sound speed in the ocean, and is for internal use by the ADCP.

00+348:01:59:52.128 177204

| Field | Data | Format | Unit |
|-------|-----------------|---------------------|---------|
| 1 | RVDAS time tag | yy+ddd:hh:mm:ss.sss | UTC |
| 2 | Raw data counts | xxxxxx | Integer |

ladc - ADCP Speed Log

00+019:23:59:59.099 \$PUHAW,UVH,-1.48,-0.51,250.6

00+019:23:59:59.099 \$VDVBW,10.30,0.32,A,,,*2C

| Field | Data | Unit |
|-------|---|----------------|
| 1 | RVDAS time tag | UTC |
| 2 | \$PUHAW (used when speedlog derived from the NB150) | text |
| 3 | UVH (E-W, N-S, Heading) | text |
| 4 | Ship speed over water relative to reference ¹ layer velocity ² , East vector | knots |
| 5 | Ship speed over water relative to reference ¹ layer velocity ² , North vector | knots |
| 6 | Ship heading | Degrees (true) |

| Field | Data | Unit |
|-------|--|----------------|
| 1 | RVDAS time tag | UTC |
| 2 | \$VDVBW (used when speedlog derived from the OS38) | text |
| 3 | Longitudinal water speed (negative means astern) | knots |
| 4 | Transverse water speed (negative means to port) | knots |
| 5 | Status | A = Data Valid |
| 6 | Longitudinal ground speed ³ | knots |
| 7 | Transverse ground speed ³ | knots |
| 8 | Status ³ | A = Data Valid |
| 9 | Checksum | ASCII Hex |

¹The reference layer is an average velocity measured in a number of depth “bins”. On the LMG, the bins are typically eight meters deep and bins 3-10 define the reference layer. Hence, the reference layer is the water column from 16-80 meters beneath the ship.

²The speed output is water velocity relative to the ship’s hull and is therefore opposite of the actual movement of the ship. For example, if the ship’s heading is due north, the North/South reference layer velocity is likely to be negative (southerly).

³The ADCP system only supplies speed over water, thus these fields are null.

lgyr - Gyrocompass

02+315:23:59:58.616 \$HEHDT,287.7,T*25

| Field | Data | Format | Unit |
|-------|-------------------------|---------------------|--------------|
| 1 | RVDAS time tag | yy+ddd:hh:mm:ss.sss | UTC |
| 2 | \$HEHDT | | |
| 3 | Heading | x.xx | degrees |
| 4 | T = True (for previous) | x | T |
| 5 | Checksum | xx | alphanumeric |

lsep - Seapath 330 GPS**INZDA: Time and Date Data**

10+351:23:59:58.142 \$INZDA,235958.08,17,12,2010,,*78

| Field | Data | Format | Unit |
|-------|----------------|---------------------|--------------|
| 1 | RVDAS time tag | yy+ddd:hh:mm:ss.sss | UTC |
| 2 | \$INZDA | | |
| 3 | Time | hhmmss.ss | UTC |
| 4 | Day | dd | UTC |
| 5 | Month | mm | UTC |
| 6 | Year | yyyy | UTC |
| 7 | (empty field) | x | Blank or 0 |
| 8 | Checksum | xx | alphanumeric |

INGGA: Global Positioning Fix Data

10+351:23:59:58.142 \$INGGA,235958.07,6118.168460,S,06008.089527,W,1,12,0.7,22.57,M,17.79,M,,*46

| Field | Data | Format | Unit |
|-------|---|---------------------|-------------|
| 1 | RVDAS time tag | yy+ddd:hh:mm:ss.sss | UTC |
| 2 | \$INGGA | | |
| 3 | Time | hhmmss.ss | UTC |
| 4 | Latitude in degrees with decimal minutes | ddmm.mmmmmm | degrees |
| 5 | North or South (for previous) | x | N or S |
| 6 | Longitude in degrees with decimal minutes | ddmm.mmmmmm | ddmm.mmmmmm |
| 7 | East or West (for previous) | x | E or W |
| 8 | GPS quality indicator | X | 0 – 6 |
| 9 | Number of satellites in use (00-99) | xx | 00-99 |
| 10 | Horizontal dilution of precision (HDOP) | x.x | |
| 11 | Antenna height | x.xx | meters |
| 12 | M = meters (for previous) | X | M |
| 13 | Geoidal separation | x.xx | meters |
| 14 | M = meters (for previous) | X | M |
| 15 | Age of DGPS corrections (null with no DGPS) | x.x | seconds |
| 16 | If used, ID of DGPS reference station | XXXX | 0000 - 1023 |

INRMC: Recommended Minimum Specific GNSS Data

10+351:23:59:58.200 \$INRMC,235958.07,A,6118.168460,S,06008.089527,W,12.8,331.22,171210,11.3,E,A*1C

| Field | Data | Format | Unit |
|-------|---|---------------------|--------------|
| 1 | RVDAS time tag | yy+ddd:hh:mm:ss.sss | UTC |
| 2 | \$INRMC | | |
| 3 | Time | hhmmss.sss | UTC |
| 4 | Status A=valid data, N=receiver warning | x | A or N |
| 5 | Latitude | ddmm.mmmmmm | degrees |
| 6 | North or South (for previous) | x | N or S |
| 7 | Longitude | ddmm.mmmmmm | degrees |
| 8 | East or West (for previous) | x | E or W |
| 9 | Speed over Ground, True | x.x | knots |
| 10 | Course over Ground True | x.xx | degrees |
| 11 | Date | ddmmyy | UTC |
| 12 | Magnetic Variation | x.x | degrees |
| 13 | East or West (for previous) | x | E or W |
| 14 | Mode | x | alphanumeric |
| 15 | Checksum | xx | UTC |

INVtg: Speed Over Ground, Course Over Ground

14+025:23:59:59.100 \$INVtg,32.69,T,,M,10.6,N,19.6,K,A*1A

| Field | Data | Format | Unit |
|-------|---|---------------------|--------------|
| 1 | RVDAS time tag | yy+ddd:hh:mm:ss.sss | UTC |
| 2 | \$GPVTG | | |
| 3 | Heading | x.xx | degrees |
| 4 | T = True (for previous) | x | T |
| 5 | Heading | x.xx | degrees |
| 6 | M = Magnetic (for previous) | x | M |
| 7 | Speed over Ground (knots) | x.x | knots |
| 8 | N = knots (for previous) | x | N |
| 9 | Speed over Ground (kilometers per hour) | x.x | km/h |
| 10 | K = km per hour (for previous) | x | K |
| 11 | Mode* | X | A,D,E, or N |
| 12 | Checksum | xx | alphanumeric |

PSXN,20: Data Quality

10+351:23:59:58.200 \$PSXN,20,1,2,0,0*38

| Field | Data | Format | Unit |
|-------|--|---------------------|--------------|
| 1 | RVDAS time tag | yy+ddd:hh:mm:ss.sss | UTC |
| 2 | \$PSXN | | |
| 3 | 20 | | |
| 4 | Horizontal position and velocity quality | x | 0,1,2 |
| 5 | Height and vertical velocity quality | x | 0,1,2 |
| 6 | Heading quality | x | 0,1,2 |
| 7 | Roll and pitch quality | x | 0,1,2 |
| 8 | Checksum | xx | alphanumeric |

Quality flags: 0 = normal, 1 = reduced performance, 2 = invalid data

PSXN,23: Roll, Pitch, Heading and Heave

10+351:23:59:58.213 \$PSXN,23,0.02,-0.76,330.56,*0B

| Field | Data | Format | Unit |
|-------|--------------------------------|---------------------|--------------|
| 1 | RVDAS time tag | yy+ddd:hh:mm:ss.sss | UTC |
| 2 | \$PSXN | | |
| 3 | 23 | | |
| 4 | Roll, port side up is positive | x.xx | degrees |
| 5 | Pitch, bow up is positive | x.xx | degrees |
| 6 | Heading, True | x.xx | degrees |
| 7 | Heave, positive is down | x.xx | m |
| 8 | Checksum | xx | alphanumeric |

Igar - Garmin GPS

RMC: Recommended Minimum for Navigation

15+051:21:02:04.741 \$GPRMC,210204.38,A,7712.979182,S,16741.063669,W,9.4,270.82,200215,105.6,E,A*06

| Field | Data | Format | Unit |
|-------|-------------------------------|---------------------|--------------|
| 1 | RVDAS time tag | yy+ddd:hh:mm:ss.sss | UTC |
| 2 | \$GPRMC | | |
| 3 | Time | hhmmss.sss | UTC |
| 4 | Status* | x | A or N |
| 5 | Latitude | ddmm.mmmmmm | degrees |
| 6 | North or South (for previous) | x | N or S |
| 7 | Longitude | ddmm.mmmmmm | degrees |
| 8 | East or West (for previous) | x | E or W |
| 9 | Speed over Ground, True | x.x | knots |
| 10 | Course over Ground True | x.xx | degrees |
| 11 | Date | ddmmyy | UTC |
| 12 | Magnetic Variation | x.x | degrees |
| 13 | East or West (for previous) | x | E or W |
| 14 | Mode* | x | alphanumeric |
| 15 | Checksum | xx | UTC |

GGA: Global Positioning Fix Data

08+034:12:26:06.131 \$GPGGA,122607,6446.4733,S,06403.4455,W,1,11,0.9,-193.4,M,9.7,M,,*5A

| Field | Data | Format | Unit |
|-------|---|---------------------|-------------|
| 1 | RVDAS time tag | yy+ddd:hh:mm:ss.sss | UTC |
| 2 | \$GPGGA | | |
| 3 | Time | hhmmss.ss | UTC |
| 4 | Latitude in degrees with decimal minutes | ddmm.mmmmmm | degrees |
| 5 | North or South (for previous) | x | N or S |
| 6 | Longitude in degrees with decimal minutes | ddmm.mmmmmm | ddmm.mmmmmm |
| 7 | East or West (for previous) | x | E or W |
| 8 | GPS quality indicator | x | 0 – 6 |
| 9 | Number of satellites in use (00-99) | xx | 00-99 |
| 10 | Horizontal dilution of precision (HDOP) | x.x | |
| 11 | Antenna height | x.xx | meters |
| 12 | M = meters (for previous) | X | M |
| 13 | Geoidal separation | x.xx | meters |
| 14 | M = meters (for previous) | X | M |
| 15 | Age of DGPS corrections (null with no DGPS) | x.x | seconds |
| 16 | If used, ID of DGPS reference station | XXXX | 0000 - 1023 |

VTG: Track Made Good and Speed over Ground
 15+051:16:47:06.625 \$GPVTG,357.84,T,251.99,M,9.5,N,17.7,K,A*15

| Field | Data | Format | Unit |
|-------|---|---------------------|--------------|
| 1 | RVDAS time tag | yy+ddd:hh:mm:ss.sss | UTC |
| 2 | \$GPVTG | | |
| 3 | Heading | x.xx | degrees |
| 4 | T = True (for previous) | x | T |
| 5 | Heading | x.xx | degrees |
| 6 | M = Magnetic (for previous) | x | M |
| 7 | Speed over Ground (knots) | x.x | knots |
| 8 | N = knots (for previous) | x | N |
| 9 | Speed over Ground (kilometers per hour) | x.x | km/h |
| 10 | K = km per hour (for previous) | x | K |
| 11 | Mode* | X | A,D,E, or N |
| 12 | Checksum | xx | alphanumeric |

Modes

A = GPS used, D = DGPS used, E = Dead reckoning used, N = Invalid position / velocity

GNS: Global Positioning Fix Data

16+148:00:00:01.835 \$GPGNS,000001,6451.3766,S,06352.1432,W,AA,21,0.5,33.0,M,12.7,M,*50

| Field | Data | Format | Unit |
|-------|---|---------------------|--------------|
| 1 | RVDAS time tag | yy+ddd:hh:mm:ss.sss | UTC |
| 2 | \$GPGNS | | |
| 3 | Time | hhmmss.ss | UTC |
| 4 | Latitude in degrees with decimal minutes | ddmm.mmmmmm | degrees |
| 5 | North or South (for previous) | x | N or S |
| 6 | Longitude in degrees with decimal minutes | ddmm.mmmmmm | ddmm.mmmmmm |
| 7 | East or West (for previous) | x | E or W |
| 8 | Mode indicator* | x[x] | N, A, D, P |
| 9 | Number of satellites in use (00-99) | xx | 00-99 |
| 10 | Horizontal dilution of precision (HDOP) | x.x | |
| 11 | Antenna height | x.xx | meters |
| 12 | M = meters (for previous) | X | M |
| 13 | Geoidal separation | x.xx | meters |
| 14 | M = meters (for previous) | X | M |
| 15 | Age of DGPS corrections (null with no DGPS) | x.x | seconds |
| 16 | If used, ID of DGPS reference station | xxxx | 0000 - 1023 |
| 17 | Checksum | xx | alphanumeric |

* **Mode Indicator:** One character indicator per constellation tracked. First character for GPS, second (optional) for GLONASS

A = Autonomous, N = No fix, D = Differential, P = Precise

lais - AIS receiver

AIVDM: AIS Data

14+070:00:02:38.575 !AIVDM,1,1,,B,15O5G4000oKPfggK2F2RQj7>0@FU,0*04

| Field | Data | Format |
|-------|--|---------------------|
| 1 | RVDAS time tag | yy+ddd:hh:mm:ss.sss |
| 2 | !AIVDM | text |
| 3 | Total number of sentences needed to transfer message | (1-9) |
| 4 | Message sentence number | (1-9) |
| 5 | Sequential identifier to link multiple messages | (0-9 or null) |
| 6 | AIS channel | A or B |
| 7 | Encapsulated Binary Coded Data ¹ | ASCII text |
| 8 | Number of fill bits | (0-5) |
| 9 | *Checksum | hexadecimal |

¹Data is encoded as described in ITU-R M.1371

LMG Sensors

Shipboard Sensors

| Sensor | Description | Serial # | Cal. Date | Status |
|----------------------|----------------------------------|--------------|--------------|-----------|
| Port Anemometer | Gill Ultrasonic Wind Observer II | 1246001-WC45 | N/A | Collected |
| Starboard Anemometer | Gill Ultrasonic Wind Observer II | 1246002-WC45 | N/A | Collected |
| Barometer (primary) | Vaisala PTB210B | K284002 | 10-July-2014 | Collected |
| Humidity/Wet Temp | RM Young 41372LC | 6720 | 27-Sep-2017 | Collected |
| PAR for Mast | Biosph. Inst. QSR-240P | 6393 | 31-Mar-2015 | Collected |
| PIR | Eppley PIR | 32031F3 | 10-Mar-2016 | Collected |
| PSP | Eppley PSP | 31701F3 | 18-Mar-2016 | Collected |
| GUV (Mast) | Biosph. Inst. GUV-2511 | 25110805126 | 26-Mar-2015 | Collected |
| Transmissometer | WET Labs C-Star 25 cm deep | CST-407DR | 21-Aug-2015 | Collected |
| MicroTSG (Primary) | Sea-Bird 45 | 227 | 14-July-2016 | Collected |
| MicroTSG (Secondary) | Sea-Bird 45 | 390 | 30-Oct-2014 | Collected |
| Digital Remote Temp | Sea-Bird 38 | 351 | 28-Dec-2013 | Collected |
| Fluorometer | WET Labs ECO-FL | FLRTD-1735 | 22-Jun-2015 | Collected |

CTD Sensors

| Sensor | Description | Serial # | Cal. Date | Status |
|------------------------|------------------|-----------|-------------|-----------|
| CTD Fish | Seabird SBE9Plus | 0232 | 11-Apr-2016 | Collected |
| Primary Temperature | Seabird SBE3 | 4573 | 3-Feb-2015 | Collected |
| Secondary Temperature | Seabird SBE3 | 5025 | 22-Apr-2015 | Collected |
| Primary Conductivity | Seabird SBE4 | 2065 | 22-Jul-2015 | Collected |
| Secondary Conductivity | Seabird SBE4 | 2247 | 22-Apr-2015 | Collected |
| Fluorometer | Wet Labs ECO | FLRTD-398 | 17-Jun-2015 | Collected |
| Primary Oxygen | Seabird 43 | 0179 | 02-Aug-2015 | Collected |

| | | | | |
|------------------|-------------------------------|-------|-------------|-----------|
| Secondary Oxygen | Seabird 43 | 0181 | 27-Apr-2016 | Collected |
| PAR | Biospherical Instruments Inc. | 4722 | 17-Feb-2015 | Collected |
| Altimeter | Teledyne Benthos PSA-916 | 54648 | n/a | Collected |

Underway Calibration Sheets

Anemometer- Port

WindObserver II™
Product Test Report

Product Tested: WindObserver II
Part Number: 1390-70-B-322
Serial Number: 1246001 - WC45
Test Date: 16/11/2012
Location: Gill Instruments Ltd

GILL ensures that quality is inherent in all aspects of the activities and ensures that compliance with BS EN ISO9001: 2008 is maintained.

This report certifies that the above instrument has been tested in accordance with Gill internal procedures

Results

| Test | Limits | Passed |
|-----------------------------------|-----------|--------|
| Still Air Test (Zero Wind Speed) | < 0.02m/s | Pass |
| Wind Tunnel Test (12 m/s nominal) | Pass/Fail | Pass |

Generic calibration is traceable to the University of Southampton wind tunnel and instrumentation is maintained in accordance with UKAS.

All tests have been successfully completed

On behalf of Gill Instruments Ltd



Tony Raine
Quality Control

2002-0395 Issue 1

GILL INSTRUMENTS

Gill Instruments Ltd
Salisbury Port
67 Gosport Street
Lyndhurst
Hampshire
SO41 9EG, UK

T: +44 (0) 1962 613 503
E: anem@gill.co.uk

www.gill.co.uk



Copyright © Gill Instruments 2011.
Gill Instruments Ltd
Reg. No. 3154-52 Registered Office: The George Business Centre, Glastonbury Road, New Milton, BH25 6QJ

Anemometer-Starboard

WindObserver II™ Product Test Report

Product Tested: WindObserver II

Part Number: 1390-70-B-322

Serial Number: 1246002 - WC45

Test Date: 15/11/2012

Location: Gill Instruments Ltd



GILL ensures that quality is inherent in all aspects of the activities and ensures that compliance with BS EN ISO9001: 2008 is maintained.

This report certifies that the above instrument has been tested in accordance with Gill internal procedures

Results

| Test | Limits | Passed |
|-----------------------------------|-----------|--------|
| Still Air Test (Zero Wind Speed) | < 0.02m/s | Pass |
| Wind Tunnel Test (12 m/s nominal) | Pass/Fail | Pass |

Generic calibration is traceable to the University of Southampton wind tunnel and instrumentation is maintained in accordance with UKAS.

All tests have been successfully completed

On behalf of Gill Instruments Ltd

A handwritten signature in black ink, appearing to read "Tony Raine".

Tony Raine
Quality Control

2002-0395 Issue 1



Gill Instruments Ltd
37 Castle Hill
Southampton
Hampshire
SO4 7TD, UK

T: +44 (0) 1390 613 620
F: +44 (0) 1390 613 676
E: info@gill.co.uk

www.gill.co.uk



Copyright © Gill Instruments Ltd

2002-0395 Issue 1 - Gill Instruments Ltd, Castle Hill, Southampton SO4 7TD, UK. Tel: +44 (0) 1390 613 620

Barometer**VAISALA**1 (1)
Certificate report no. H44-14280026
**CALIBRATION CERTIFICATE**

Instrument PTB210B Digital Barometer
Serial number K2840001
Manufacturer Vaisala Oyj, Finland
Calibration date 10th July 2014

The above instrument was calibrated by comparing the readings of the instrument to the factory working standard of Vaisala.

The pressure readings of the factory working standard have been calibrated at an ISO/IEC 17025 accredited calibration laboratory (FINAS), Vaisala Measurement Standards Laboratory (MSL), by using MSL working standards traceable to NIST.

Calibration results

| Reference hPa | Observed hPa | Correction* hPa | Acceptance limit hPa |
|---------------|--------------|-----------------|----------------------|
| 510.0 | 510.0 | 0.0 | ± 0.2 |
| 610.0 | 610.0 | 0.0 | ± 0.2 |
| 700.0 | 700.0 | 0.0 | ± 0.2 |
| 810.0 | 810.0 | 0.0 | ± 0.2 |
| 910.0 | 910.0 | 0.0 | ± 0.2 |
| 950.0 | 950.0 | 0.0 | ± 0.2 |
| 1000.0 | 1000.0 | 0.0 | ± 0.2 |
| 1098.0 | 1098.0 | 0.0 | ± 0.2 |

*To obtain the true pressure, add the correction to the barometer reading.

Interpolated corrections may be used at intermediate readings of the scale of the barometer.

Equipment used in calibration


| | | | |
|------|---------------|------------------|--------------------|
| Type | Serial number | Calibration date | Certificate number |
| PPC4 | 476 | 2014-05-27 | K008-X01113 |

Uncertainty (95 % confidence level, k=2)

Pressure ± 0.15 hPa

Ambient Conditions

| | |
|-------------|------------------|
| Humidity | 34 %RH ± 5 %RH |
| Temperature | 23 °C ± 1 °C |
| Pressure | 1019 hPa ± 1 hPa |


Technician

Air Temperature / Relative Humidity



R.M. Young Company
2801 Aero Park Drive
Traverse City, Michigan 49686 USA

CALIBRATION REPORT Temperature

Customer: *Lockheed Martin Corp*

Test Number: 6310-01T
Test Date: 1 April 2016

Customer PO: 4102366553
Sales Order: 5361

| | |
|---|------------------------|
| Test Sensor: | |
| Model: 41372LC | Serial Number: TS06720 |
| Description: Temperature/Relative Humidity Sensor | |

Report of calibration comparison of test temperature sensor with National Institute of Standards and Technology traceable standard thermometers at three temperatures in the R.M. Young Company controlled temperature calibration bath facilities. Calibration accuracy $\pm 0.1^\circ\text{C}$.

| Bath Temperature (degrees C) | Current Output (milliamps) | Indicated (1) (degrees C) |
|---------------------------------|-------------------------------|------------------------------|
| -49.90 | 4.017 | -49.89 |
| -0.01 | 11.997 | -0.02 |
| 50.09 | 20.014 | 50.09 |

(1) Calculated from current output

All reference equipment used in this calibration procedure have been tested by comparison to traceable standards certified by the National Institute of Standards and Technology.

| Reference Instrument | Serial # | NIST Test Reference |
|--|----------|---------------------|
| Brooklyn Thermometer Model 43-FC | 3006-118 | W204690 |
| Brooklyn Thermometer Model 22332-D5-FC | 25071 | W204691 |
| Brooklyn Thermometer Model 2X400-D7-FC | 77532 | W204692 |
| Keithley Multimeter Model 191 | 15232 | 8604897 |

Tested By: R. R. Miller

M E T E O R O L O G I C A L I N S T R U M E N T S
Tel 231-946-3980 Fax 231-946-4772 Email met.sales@youngusa.com Website youngusa.com
ISO 9001:2008 CERTIFIED



R.M. Young Company
2801 Aero Park Drive
Traverse City, Michigan 49686 USA

CALIBRATION REPORT
Relative Humidity

Customer: *Lockheed Martin*

Test Number: 6310-01R
Test Date: 1 April 2016

Customer PO: 4102366553
Sales Order: 5361

| | |
|---|------------------------|
| Test Sensor: | |
| Model: 41372LC | Serial Number: TS06720 |
| Description: Temperature/Relative Humidity Sensor | |

Report of calibration comparison of test relative humidity sensor with National Institute of Standards and Technology traceable standard relative humidity sensor at five humidity levels in the R.M. Young Company controlled humidity chamber facility. Calibration accuracy $\pm 2.0\%$.

| Reference Humidity (%) | Current Output (milliamps) | Indicated (1) Humidity (%) |
|------------------------------|----------------------------------|----------------------------------|
| 10.0 | 6.1 | 12.8 |
| 30.1 | 9.1 | 31.9 |
| 50.1 | 12.5 | 53.2 |
| 70.0 | 15.6 | 72.3 |
| 90.0 | 18.3 | 89.7 |

(1) Calculated from voltage output

All reference equipment used in this calibration procedure have been tested by comparison to traceable standards certified by the National Institute of Standards and Technology.

| Reference Instrument | Serial # | NIST Test Reference |
|------------------------------------|----------|---------------------|
| Vaisala Humidity Sensor Model 35AC | N475040 | TN 266152 |
| Fluke Multimeter Model 8060A | 4865407 | 8604897 |

Tested By: *R. P. Rundall*

PAR for mast**Biospherical Instruments Inc.****CALIBRATION CERTIFICATE**

Calibration Date 3/31/2015
 Model Number QSR240
 Serial Number 6393
 Operator TPC
 Standard Lamp V-039(3/3/15)
 Probe Excitation Voltage Range: 6 to 18 VDC(+)
 Output Polarity: Positive

Probe Conditions at Calibration (in air):

Calibration Voltage: 6 VDC(-)
 Probe Current: 1.3 mA

Probe Output Voltage:

| | | |
|--------------------|-------------|----|
| Probe Illuminated | <u>97.9</u> | mV |
| Probe Dark | <u>0.4</u> | mV |
| Probe Net Response | <u>97.5</u> | mV |
| RG780 | <u>0.4</u> | mV |

Corrected Lamp Output:

Output In Air (same condition as calibration):

9.391E+13 quanta/cm²/sec
155.94603 uE/m²/sec

Calibration Scale Factor:

(To calculate Irradiance, divide the net voltage reading in Volts by this value.)

Dry: 1.0379E-17 Vi(quanta/cm²/sec)
6.2504E-04 Vi(uE/m²/sec)

Notes:

1. Annual calibration is recommended.
2. Calibration is performed using a Standard of Spectral Irradiance traceable to the National Institute of Standards and Technology (NIST).
3. The collector should be cleaned frequently with alcohol.
4. Calibration was performed with customer cable, when available.



THE EPPELEY LABORATORY, INC.

12 Sheffield Avenue, PO Box 419, Newport, Rhode Island USA 02840
Phone: 401.847.1020 Fax: 401.847.1031 Email: info@eppleylab.com

STANDARDIZATION OF EPPELEY PRECISION INFRARED RADIOMETER Model PIR

Serial Number: 32031F3

Resistance: 709Ω at 23°C

Temperature Compensation Range: -20° to $+40^\circ\text{C}$

This pyrgeometer has been compared against Eppley's Blackbody Calibration System under radiation intensities of approximately 200 watts meter $^{-2}$ and an average ambient temperature of 23°C as measured by Standard Omega Temperature Probe, RTD#1.

As a result of a series of comparisons, it has been found to have a sensitivity of:

$$3.87 \times 10^{-6} \text{ volts/watts meter}^{-2}$$

The calculation of this constant is based on the fact that the relationship between radiation intensity and emf is rectilinear to intensities of 700 watts meter $^{-2}$. This radiometer is linear to within $\pm 1.0\%$ up to this intensity.

The calibration of this instrument is traceable to the International Practical Temperature Scale (IPTS) through a precision low-temperature blackbody.

Eppley recommends a minimum calibration cycle of five (5) years but encourages annual calibrations for highest measurement accuracy. Unless otherwise stated in the remarks section below or on the Sales Order, the results are "AS FOUND / AS LEFT".

Shipped to: NSF/Lockheed Martin
Port Hueneme, CA

Date of Test: March 10, 2016

In Charge of Test: *Dilza L. Hovitz*

S.O. Number: 64668
Date: March 10, 2016

Reviewed by: *Thomas D. Kuh*

Remarks:

End of Report



THE EPPELEY LABORATORY, INC.

12 Sheffield Avenue, PO Box 419, Newport, Rhode Island USA 02840
Phone: 401.847.1020 Fax: 401.847.1031 Email: info@eppleylab.com

Calibration Certificate

Instrument: Precision Spectral Pyranometer, Model PSP, Serial Number 31701F3

Procedure: This pyranometer was compared in Eppley's Integrating Hemisphere according to procedures described in *ISO 9847 Section 5.3.1* and Technical Procedure, TP01 of The Eppley Laboratory, Inc.'s Quality Assurance Manual on Calibrations.

Transfer Standard: Eppley Standard Precision Pyranometer, Model SPP, Serial Number 37501F3

Results: **Sensitivity:** $S = 7.58 \mu\text{V} / \text{Wm}^{-2}$

Uncertainty: $U_{95} = \pm 0.91\%$ (95% confidence level, $k=2$)

Resistance: 674Ω at 23°C

Date of Test: March 18, 2016

Traceability: This calibration is traceable to the World Radiation Reference (WRR) through comparisons with Eppley's AHF standard self-calibrating cavity pyrheliometers which participated in the Eleventh International Pyrheliometric Comparisons (IPC XI) at Davos, Switzerland in September-October 2010. Unless otherwise stated in the remarks section below or on the Sales Order, the results of this calibration are "AS FOUND / AS LEFT".

Due Date: Eppley recommends a minimum calibration cycle of five (5) years but encourages annual calibrations for highest measurement accuracy.

Customer: NSF/Lockheed Martin
Port Hueneme, CA

Signatures:

Dilra P. Heintz
In Charge of Test:

Thomas J. Kueh
Reviewed by:

Eppley SO: 64669

Date of Certificate: March 18, 2016

Remarks: Sensitivity before Repainting Element = $8.11 \mu\text{V} / \text{Wm}^{-2}$

End of Report

GUV



Biospherical Instruments Inc.

System Calibration Certificate

THE INSTRUMENTS REFERENCED BELOW WERE FACTORY TESTED AND CALIBRATED BY

BIOSPHERICAL INSTRUMENTS INC.
5340 Riley Street
San Diego, California 92110 USA

Instruments: GUV-2511 No 25110805126

Optical Calibrations:

NIST Traceability. For wavelengths longer than 313 nm, the specific instruments cited here were calibrated using a 1000W FEL #V-033 (3/3/15) following procedures and standards traceable to NIST Standard of Spectral Irradiance F616. Traceability paths and all procedures for all calibrated lamps and associated apparatus (shunts, power supplies, DMMs, etc) are maintained following calibration methodologies per National Bureau of Standards (US) (NBS) Special Publication 250-20 Spectral Irradiance Calibrations (1987) and NBS Publication 594-13 Optical Radiation Measurements: The 1973 Scale of Spectral Irradiance (1977).

Solar Calibrations. Lamp calibrations are problematic for solar UV measurements (wavelengths below 320 nm) because the solar spectrum is radically different from the lamp spectrum and changes greatly as a function of wavelength. Solar calibrations are achieved through direct comparison with measurements of a high resolution scanning spectroradiometer in San Diego (SUV-100), which is part of the National Science Foundation's UV Monitoring Network. The SUV-100 instrument has a bandwidth of 1 nm. Calibrated filter radiometer data therefore report spectral irradiance at the channel's nominal wavelengths with a bandwidth of 1 nm. Solar calibrations are typically accurate to within $\pm 10\%$ for solar zenith angles smaller than 75° . At larger solar zenith angles, UV channels have a greater uncertainty due to the rapid change of the solar UV spectrum.

Note that this certificate contains a subset of the information delivered in the calibration database **25110805126v7.mdb**. This database is required for operation of this system using Biospherical Instruments Inc.'s Logger® software.



| GUV-2511 Calibration Certificate | | | | | | | | | | |
|--|---------|--------------------|---|--|---|--|------------------------|---|------------------------|----------------------|
| System Serial Number Calibration database DASSN Microprocessor Tag Number | | | | | Date of Calibration Date of Certificate Standard of Spectral Irradiance Operator | | | 3/26/2015 3/26/2015 V-033(3/3/15) TC | | |
| Monochromatic | | | | | | | | | | |
| Channels | Address | Wavelength [nm] | Responsivity [Amps per μW/(cm²·nm)] | ScaleSmall [Volts per μW/(cm²·nm)] | ScaleMedium [Volts per μW/(cm²·nm)] | ScaleLarge [Volts per μW/(cm²·nm)] | OffsetSmall [volts] | OffsetMedium [volts] | OffsetLarge [volts] | Measurement Units |
| Ed0305 | 2 | 305 | 4.5490E-11 | 4.8797E-06 | 1.3675E-03 | 4.1638E-01 | -1.5873E-05 | -1.7560E-05 | 1.1270E-03 | μW/(cm²·nm) |
| Ed0313 | 8 | 313 | 2.4245E-10 | 2.4723E-05 | 7.2276E-03 | 2.5437E+00 | -8.2071E-05 | -8.1061E-05 | 1.0222E-03 | μW/(cm²·nm) |
| Ed0320 | 8 | 320 | 2.6374E-10 | 2.6841E-05 | 7.8887E-03 | 2.7307E+00 | -2.2212E-04 | -2.2188E-04 | 4.7992E-04 | μW/(cm²·nm) |
| Ed0340 | 10 | 340 | 1.9098E-10 | 2.0351E-05 | 5.9658E-03 | 2.1085E+00 | -8.2615E-05 | -8.1632E-05 | 1.1020E-03 | μW/(cm²·nm) |
| Ed0380 | 12 | 380 | 7.2720E-11 | 7.4101E-06 | 2.1623E-03 | 7.5907E-01 | -3.4233E-04 | -3.4152E-04 | 3.2530E-04 | μW/(cm²·nm) |
| Ed0395 | 13 | 395 | 2.9103E-10 | 2.9760E-05 | 8.7388E-03 | 3.0398E+00 | 1.0107E-04 | 1.0516E-04 | 1.4394E-03 | μW/(cm²·nm) |
| Broadband | | | | | | | | | | |
| Channels | Address | Wavelength [nm] | Responsivity [Amps per μE/(cm²·s)] | ScaleSmall [Volts per μE/(cm²·s)] | ScaleMedium [Volts per μE/(cm²·s)] | ScaleLarge [Volts per μE/(cm²·s)] | OffsetSmall [volts] | OffsetMedium [volts] | OffsetLarge [volts] | Measurement Units |
| Ed0PAR | 18 | 400-700 | 1.7133E-05 | 1.7452E+00 | 5.1139E+02 | 1.7900E+05 | 1.8944E-05 | 2.3095E-05 | 1.3509E-03 | μE/(cm²·sec) |
| Auxiliary | | | | | | | | | | |
| Channels | Address | Wavelength | Responsivity | ScaleS | ScaleM | ScaleL | OffsetS | OffsetM | OffsetL | Measurement Units |
| Ed0Temp | 22 | 0 | 1 | 0.01 | 0.01 | 0.01 | 0 | 0 | 0 | °C |
| Ed0VIn | 27 | 0 | 1 | -0.25 | -0.25 | -0.25 | 0 | 0 | 0 | V |

© Biospherical Instruments Inc., 5340 Riley Street, San Diego, California 92110 USA. Contact support@biospherical.com for more information.

Transmissometer

PO Box 518
620 Applegate St.
Philomath, OR 97370



(541) 929-5650
Fax (541) 929-5277
www.wetlabs.com

C-Star Calibration

| Date | 8.21.15 | S/N# | CST-407DR | Pathlength | 25cm |
|--|---------|----------------------|-----------------------|----------------|------|
| V_d | | Analog output | Digital output | | |
| V_{air} | | 0.004 V | 0 counts | | |
| V_{ref} | | 4.821 V | 15832 counts | | |
| | | 4.699 V | 15433 counts | | |
| Temperature of calibration water | | | | 24.3 °C | |
| Ambient temperature during calibration | | | | 22.8 °C | |

Relationship of transmittance (Tr) to beam attenuation coefficient (c), and pathlength (x, in meters): $Tr = e^{-cx}$

To determine beam transmittance: $Tr = (V_{sig} - V_{dark}) / (V_{ref} - V_{dark})$

To determine beam attenuation coefficient: $c = -1/x * \ln (Tr)$

V_d Meter output with the beam blocked. This is the offset.

V_{air} Meter output in air with a clear beam path.

V_{ref} Meter output with clean water in the path.

Temperature of calibration water: temperature of clean water used to obtain V_{ref}.

Ambient temperature: meter temperature in air during the calibration.

V_{sig} Measured signal output of meter.

Thermosalinograph (Temperature) - Primary**Sea-Bird Electronics, Inc.**

13431 NE 20th Street, Bellevue, WA 98005-2010 USA

Phone: (+1) 425-643-9866 Fax (+1) 425-643-9954 Email: seabird@seabird.com

SENSOR SERIAL NUMBER: 0227
CALIBRATION DATE: 14-Jul-16SBE 45 TEMPERATURE CALIBRATION DATA
ITS-90 TEMPERATURE SCALE

COEFFICIENTS:


a₀ = 9.075552e-006
 a₁ = 2.775935e-004
 a₂ = -2.569659e-006
 a₃ = 1.571654e-007

| BATH TEMP (° C) | INSTRUMENT OUTPUT (counts) | INST TEMP (° C) | RESIDUAL (° C) |
|--------------------|-------------------------------|--------------------|-------------------|
| 1.0000 | 664655.5 | 1.0001 | 0.0001 |
| 4.5000 | 568082.5 | 4.4999 | -0.0001 |
| 15.0000 | 361660.6 | 15.0001 | 0.0001 |
| 18.5000 | 313053.4 | 18.5001 | 0.0001 |
| 24.0000 | 251010.6 | 23.9999 | -0.0001 |
| 29.0000 | 206591.2 | 28.9999 | -0.0001 |
| 32.5000 | 180857.5 | 32.5001 | 0.0001 |

n = Instrument Output (counts)

$$\text{Temperature ITS-90 (°C)} = 1/\{a_0 + a_1[\ln(n)] + a_2[\ln^2(n)] + a_3[\ln^3(n)]\} - 273.15$$

Residual (°C) = instrument temperature - bath temperature

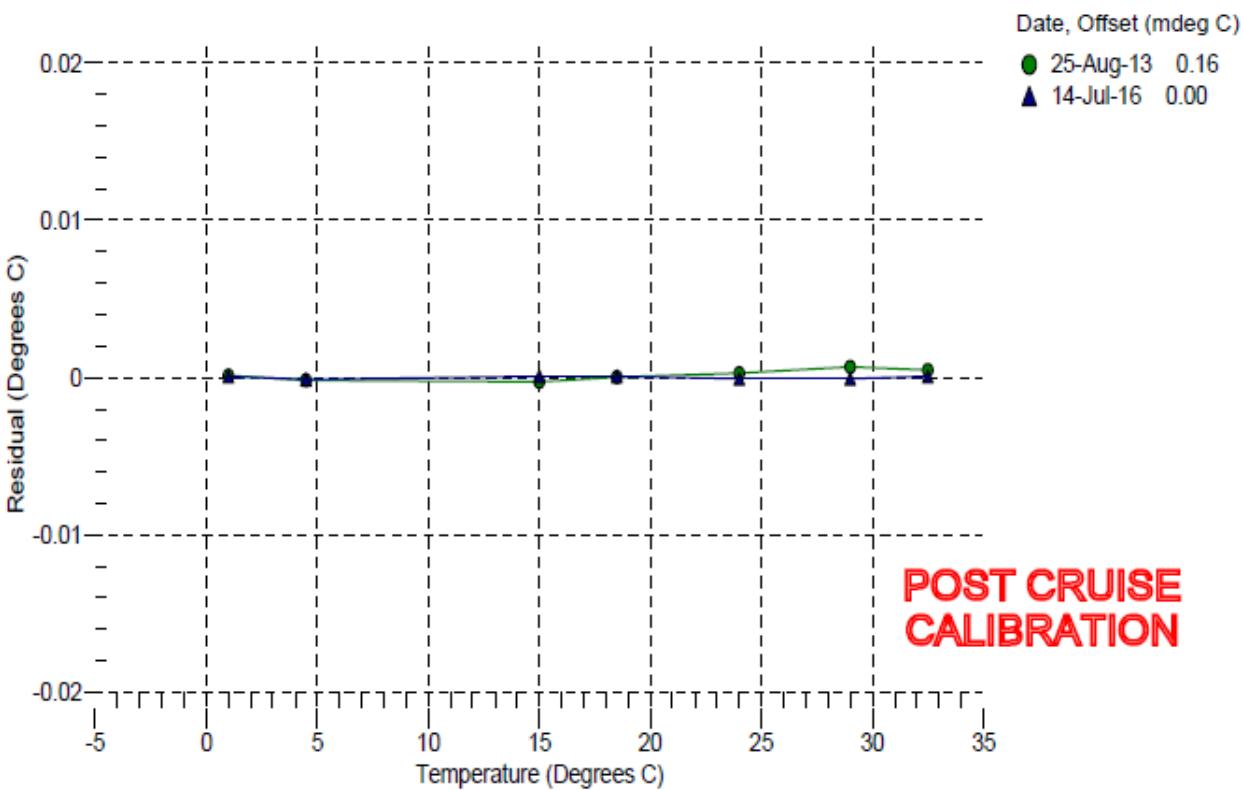

Thermosalinograph (Conductivity) – Primary**Sea-Bird Electronics, Inc.**

13431 NE 20th Street, Bellevue, WA 98005-2010 USA

Phone: (+1) 425-643-9866 Fax (+1) 425-643-9954 Email: seabird@seabird.com

SENSOR SERIAL NUMBER: 0227
CALIBRATION DATE: 14-Jul-16SBE 45 CONDUCTIVITY CALIBRATION DATA
PSS 1978: C(35,15,0) = 4.2914 Siemens/meter

COEFFICIENTS:

| | |
|--------------------|----------------------|
| g = -1.019501e+000 | CPcor = -9.5700e-008 |
| h = 1.579848e-001 | CTcor = 3.2500e-006 |
| i = -4.519137e-004 | WBOTC = 1.0472e-006 |
| j = 6.150548e-005 | |


| BATH TEMP (° C) | BATH SAL (PSU) | BATH COND (S/m) | INSTRUMENT OUTPUT (Hz) | INSTRUMENT COND (S/m) | RESIDUAL (S/m) |
|--------------------|-------------------|--------------------|---------------------------|--------------------------|-------------------|
| 22.0000 | 0.0000 | 0.00000 | 2546.34 | 0.00000 | 0.00000 |
| 1.0000 | 34.8845 | 2.98124 | 5043.68 | 2.98124 | -0.00000 |
| 4.5000 | 34.8634 | 3.28873 | 5233.36 | 3.28873 | 0.00000 |
| 15.0000 | 34.8195 | 4.27196 | 5797.58 | 4.27197 | 0.00001 |
| 18.5000 | 34.8096 | 4.61758 | 5982.97 | 4.61757 | -0.00000 |
| 24.0000 | 34.7993 | 5.17638 | 6270.81 | 5.17637 | -0.00001 |
| 29.0000 | 34.7942 | 5.69911 | 6528.23 | 5.69911 | 0.00000 |
| 32.5000 | 34.7920 | 6.07223 | 6705.75 | 6.07231 | 0.00008 |

$$f = \text{Instrument Output(Hz)} * \sqrt{1.0 + WBOTC * t} / 1000.0$$

t = temperature (°C); p = pressure (decibars); δ = CTcor; ε = CPcor;

$$\text{Conductivity (S/m)} = (g + h * f^2 + i * f^3 + j * f^4) / 10 (1 + \delta * t + \epsilon * p)$$

Residual (Siemens/meter) = instrument conductivity - bath conductivity

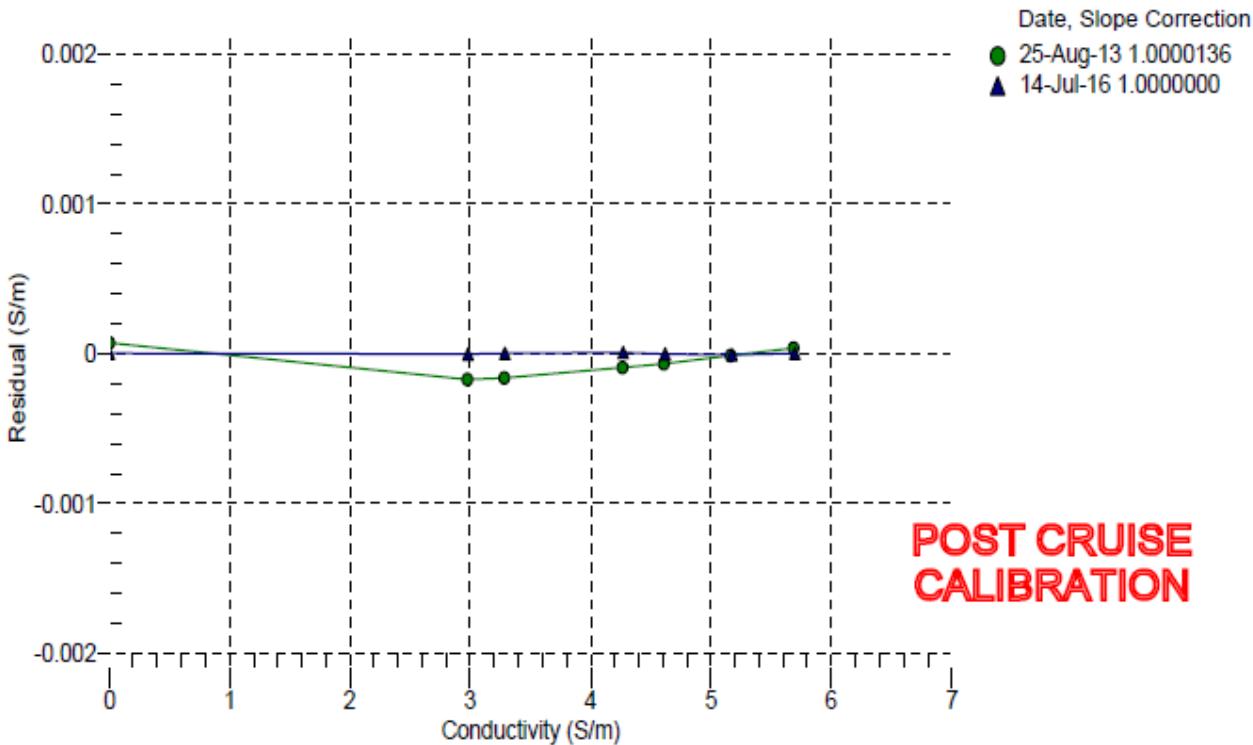

Thermosalinograph (Temperature) - Secondary**Sea-Bird Electronics, Inc.**

13431 NE 20th Street, Bellevue, WA 98005-2010 USA

Phone: (+1) 425-643-9866 Fax (+1) 425-643-9954 Email: seabird@seabird.com

SENSOR SERIAL NUMBER: 0390
CALIBRATION DATE: 30-Oct-14SBE 45 TEMPERATURE CALIBRATION DATA
ITS-90 TEMPERATURE SCALE

COEFFICIENTS:


a0 = 8.496577e-006
 a1 = 2.825921e-004
 a2 = -3.093430e-006
 a3 = 1.690910e-007

| BATH TEMP (ITS-90) | INSTRUMENT OUTPUT | INST TEMP (ITS-90) | RESIDUAL (ITS-90) |
|-----------------------|----------------------|-----------------------|----------------------|
| 1.0000 | 662306.1 | 1.0000 | 0.0000 |
| 4.5000 | 565262.5 | 4.5000 | -0.0000 |
| 15.0000 | 358389.6 | 15.0000 | 0.0000 |
| 18.5000 | 309815.7 | 18.5000 | -0.0000 |
| 24.0000 | 247915.6 | 23.9999 | -0.0001 |
| 29.0000 | 203683.3 | 29.0001 | 0.0001 |
| 32.5000 | 178100.4 | 32.5000 | -0.0000 |

$$\text{Temperature ITS-90} = 1/\{a_0 + a_1[\ln(n)] + a_2[\ln^2(n)] + a_3[\ln^3(n)]\} - 273.15 \text{ } (\text{°C})$$

Residual = instrument temperature - bath temperature

n = instrument output

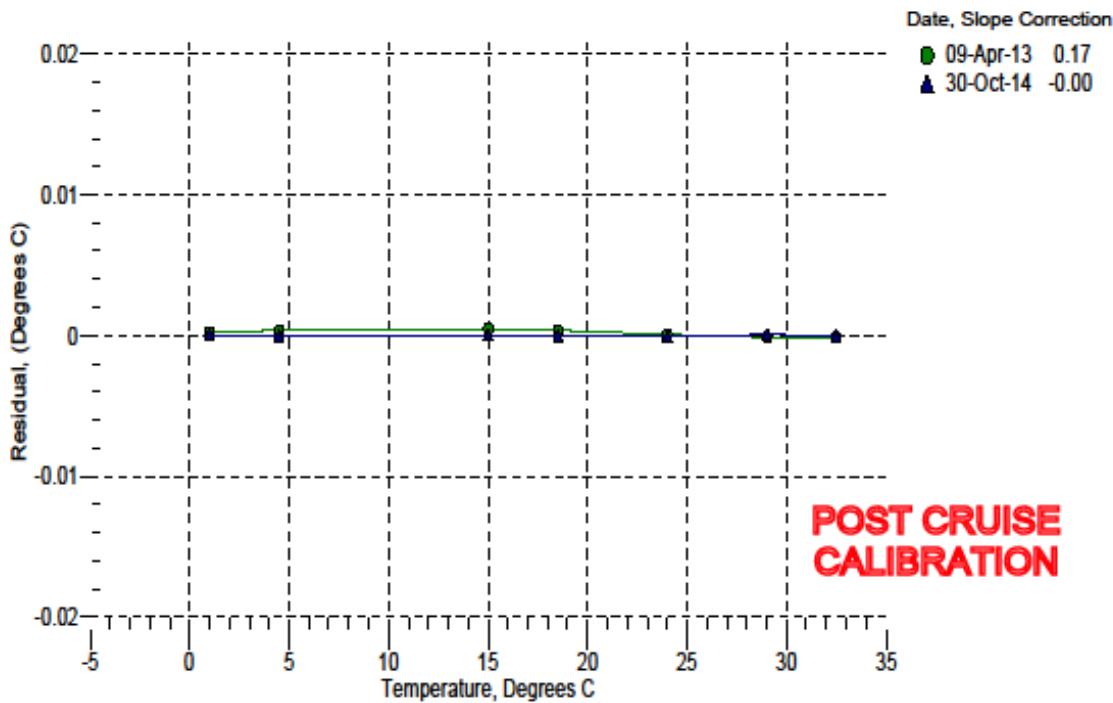

Thermosalinograph (Conductivity) – Secondary

Sea-Bird Electronics, Inc.
13431 NE 20th Street, Bellevue, WA 98005-2010 USA
Phone: (+1) 425-643-9866 Fax (+1) 425-643-9954 Email: seabird@seabird.com

SENSOR SERIAL NUMBER: 0390
CALIBRATION DATE: 30-Oct-14

SBE 45 CONDUCTIVITY CALIBRATION DATA
PSS 1978: C(35,15,0) = 4.2914 Siemens/meter

COEFFICIENTS:

| | |
|--------------------|----------------------|
| g = -9.863328e-001 | CPcor = -9.5700e-008 |
| h = 1.453844e-001 | CTcor = 3.2500e-006 |
| i = -4.104173e-004 | WBOTC = 2.8724e-007 |
| j = 5.237151e-005 | |


| BATH TEMP (ITS-90) | BATH SAL (PSU) | BATH COND (Siemens/m) | INST FREQ (Hz) | INST COND (Siemens/m) | RESIDUAL (Siemens/m) |
|-----------------------|-------------------|--------------------------|-------------------|--------------------------|-------------------------|
| 22.0000 | 0.0000 | 0.00000 | 2611.09 | 0.00000 | 0.00000 |
| 1.0000 | 34.6932 | 2.96644 | 5227.11 | 2.96644 | -0.00000 |
| 4.5000 | 34.6730 | 3.27253 | 5425.21 | 3.27254 | 0.00001 |
| 15.0000 | 34.6287 | 4.25103 | 6014.01 | 4.25103 | -0.00000 |
| 18.5000 | 34.6182 | 4.59492 | 6207.39 | 4.59491 | -0.00000 |
| 24.0000 | 34.6058 | 5.15076 | 6507.48 | 5.15076 | -0.00000 |
| 29.0000 | 34.5974 | 5.67049 | 6775.69 | 5.67050 | 0.00001 |
| 32.5000 | 34.5926 | 6.04138 | 6960.54 | 6.04137 | -0.00001 |

$$f = \text{INST FREQ} * \sqrt{1.0 + \text{WBOTC} * t} / 1000.0$$

$$\text{Conductivity} = (g + h * f^2 + i * f^4 + j * f^6) / (1 + \delta * t + e * p) \text{ Siemens / meter}$$

t = temperature [°C]; p = pressure[decibars]; δ = CTcor; e = CPcor;

Residual = instrument conductivity - bath conductivity

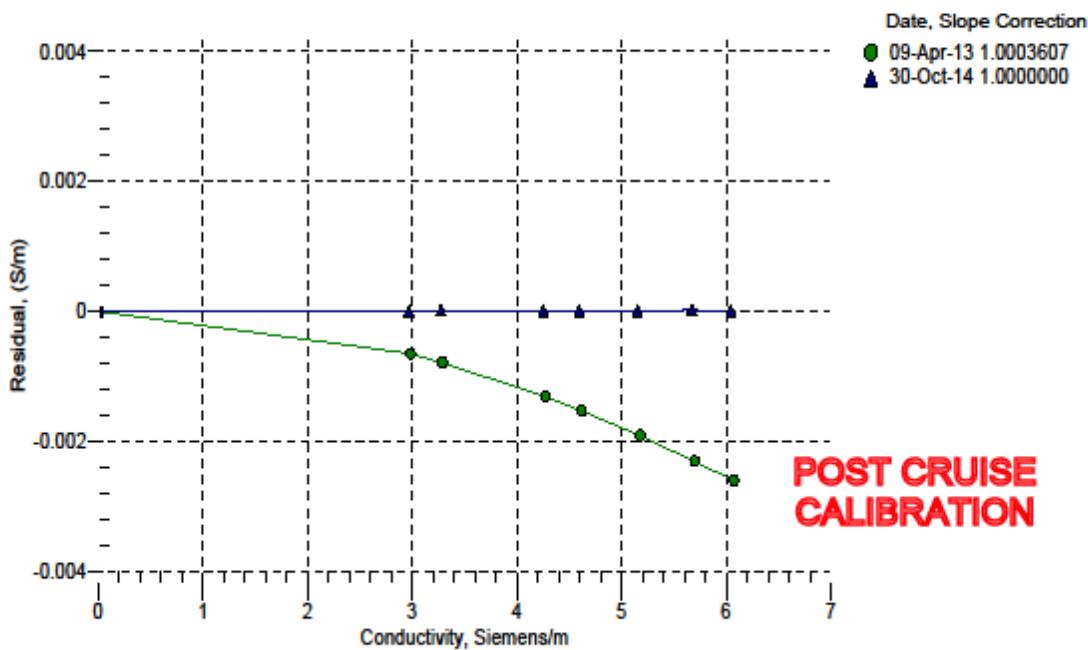

*Digital Remote Temperature***Sea-Bird Electronics, Inc.**

13431 NE 20th Street, Bellevue, WA 98005-2010 USA

Phone: (+1) 425-643-9866 Fax (+1) 425-643-9954 Email: seabird@seabird.com

SENSOR SERIAL NUMBER: 0351
CALIBRATION DATE: 28-Dec-13SBE 38 TEMPERATURE CALIBRATION DATA
ITS-90 TEMPERATURE SCALE

ITS-90 COEFFICIENTS

a0 = 6.847307e-005
 a1 = 2.737587e-004
 a2 = -2.376425e-006
 a3 = 1.515438e-007


| BATH TEMP (ITS-90) | INSTRUMENT OUTPUT | INST TEMP (ITS-90) | RESIDUAL (ITS-90) |
|-----------------------|----------------------|-----------------------|----------------------|
| -1.50000 | 674751.5 | -1.49996 | 0.00004 |
| 1.00000 | 601342.4 | 0.99997 | -0.00003 |
| 4.50020 | 513289.0 | 4.50015 | -0.00005 |
| 8.00000 | 439602.0 | 7.99997 | -0.00003 |
| 11.50000 | 377712.0 | 11.50004 | 0.00004 |
| 14.99990 | 325560.5 | 15.00003 | 0.00013 |
| 18.50020 | 281469.0 | 18.50008 | -0.00012 |
| 22.00000 | 244073.8 | 22.00011 | 0.00011 |
| 25.50000 | 212261.3 | 25.49992 | -0.00008 |
| 29.00010 | 185112.4 | 29.00003 | -0.00007 |
| 32.50010 | 161877.4 | 32.50017 | 0.00007 |

$$\text{Temperature ITS-90} = 1/(a_0 + a_1[\ln(n)] + a_2[\ln^2(n)] + a_3[\ln^3(n)]) - 273.15 \text{ } (\text{°C})$$

Residual = instrument temperature - bath temperature

Date, Delta T (mdeg C)

28-Dec-13 0.00

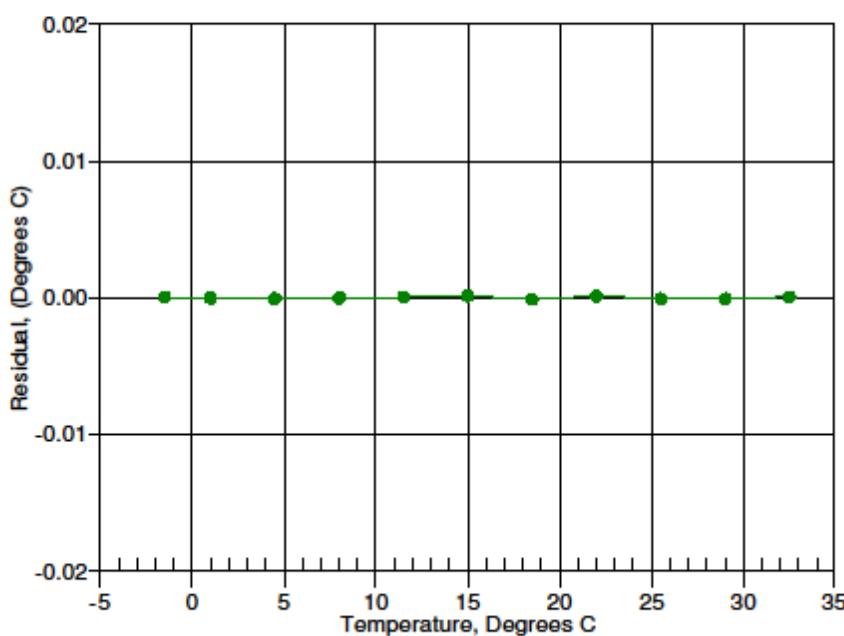

Fluorometer

PO Box 518
620 Applegate St.
Philomath, OR 97370



(541) 929-5660
Fax (541) 929-5277
www.wetlabs.com

ECO Chlorophyll Fluorometer Characterization Sheet

Date: 6/22/2015

S/N: FLRTD-1735

Chlorophyll concentration expressed in $\mu\text{g/l}$ can be derived using the equation:

$$\text{CHL } (\mu\text{g/l}) = \text{Scale Factor} * (\text{Output} - \text{Dark Counts})$$

| | Analog Range 1 | Analog Range 2 | Analog Range 4 (default) | Digital |
|-------------------|-------------------|-------------------|--------------------------------|-------------------------------------|
| Dark Counts | 0.054 | 0.025 | 0.010 V | 48 counts |
| Scale Factor (SF) | 6 | 13 | 25 $\mu\text{g/l}/\text{V}$ | 0.0076 $\mu\text{g/l}/\text{count}$ |
| Maximum Output | 4.99 | 4.99 | 4.99 V | 16380 counts |
| Resolution | 0.8 | 0.8 | 0.8 mV | 1.0 counts |

Ambient temperature during characterization 21.0 °C

Analog Range: 1 (most sensitive, 0–4,000 counts), 2 (midrange, 0–8,000 counts), 4 (entire range, 0–16,000 counts).

Dark Counts: Signal output of the meter in clean water with black tape over detector.

SF: Determined using the following equation: SF = x ÷ (output - dark counts), where x is the concentration of the solution used during instrument characterization. SF is used to derive instrument output concentration from the raw signal output of the fluorometer.

Maximum Output: Maximum signal output the fluorometer is capable of.

Resolution: Standard deviation of 1 minute of collected data.

The relationship between fluorescence and chlorophyll-a concentrations *in-situ* is highly variable. The scale factor listed on this document was determined using a mono-culture of phytoplankton (*Thalassiosira weissflogii*). The population was assumed to be reasonably healthy and the concentration was determined by using the absorption method. To accurately determine chlorophyll concentration using a fluorometer, you must perform secondary measurements on the populations of interest. This is typically done using extraction-based measurement techniques on discrete samples. For additional information on determining chlorophyll concentration see "Standard Methods for the Examination of Water and Wastewater" part 10200 H, published jointly by the American Public Health Association, American Water Works Association, and the Water Environment Federation.

CTD Calibration Sheets

Fish

Sea-Bird Electronics, Inc.


13431 NE 20th Street, Bellevue, WA 98005-2010 USA

Phone: (+1) 425-643-9866 Fax (+1) 425-643-9954 Email: seabird@seabird.com

SENSOR SERIAL NUMBER: 0232
CALIBRATION DATE: 11-Apr-16SBE 9plus PRESSURE CALIBRATION DATA
10000 psia S/N 43528DIGIQUARTZ COEFFICIENTS:
C1 = -5.103000e+004
C2 = 8.606365e-002
C3 = 1.481220e-002
D1 = 3.642300e-002
D2 = 0.000000e+000
T1 = 3.004925e+001
T2 = -3.406308e-004
T3 = 4.125600e-006
T4 = 1.811600e-009
T5 = 0.000000e+000AD590M, AD590B, SLOPE AND OFFSET:
AD590M = 1.13600e-002
AD590B = -8.42350e+000
Slope = 0.99990
Offset = 2.6333 (dbars)

| PRESSURE (PSIA) | INSTRUMENT OUTPUT (Hz) | INSTRUMENT TEMPERATURE (°C) | INSTRUMENT PRESSURE (PSIA) | CORRECTED PRESSURE (PSIA) | RESIDUAL (PSIA) |
|--------------------|---------------------------|--------------------------------|-------------------------------|------------------------------|--------------------|
| 14.657 | 33288.40 | 21.9 | 11.171 | 14.991 | 0.334 |
| 2001.105 | 33929.10 | 22.1 | 1997.269 | 2000.890 | -0.215 |
| 3988.017 | 34556.50 | 22.1 | 3984.459 | 3987.880 | -0.137 |
| 5975.077 | 35171.10 | 22.2 | 5971.977 | 5975.199 | 0.122 |
| 7962.122 | 35773.40 | 22.2 | 7959.252 | 7962.275 | 0.153 |
| 9949.340 | 36364.10 | 22.2 | 9946.540 | 9949.364 | 0.024 |
| 7962.139 | 35773.40 | 22.2 | 7959.211 | 7962.233 | 0.094 |
| 5974.944 | 35171.00 | 22.3 | 5971.565 | 5974.787 | -0.157 |
| 3987.953 | 34556.50 | 22.3 | 3984.329 | 3987.750 | -0.203 |
| 2001.129 | 33929.20 | 22.4 | 1997.410 | 2001.031 | -0.098 |
| 14.662 | 33288.40 | 22.4 | 10.930 | 14.750 | 0.088 |

Residual (PSIA) = corrected instrument pressure - reference pressure

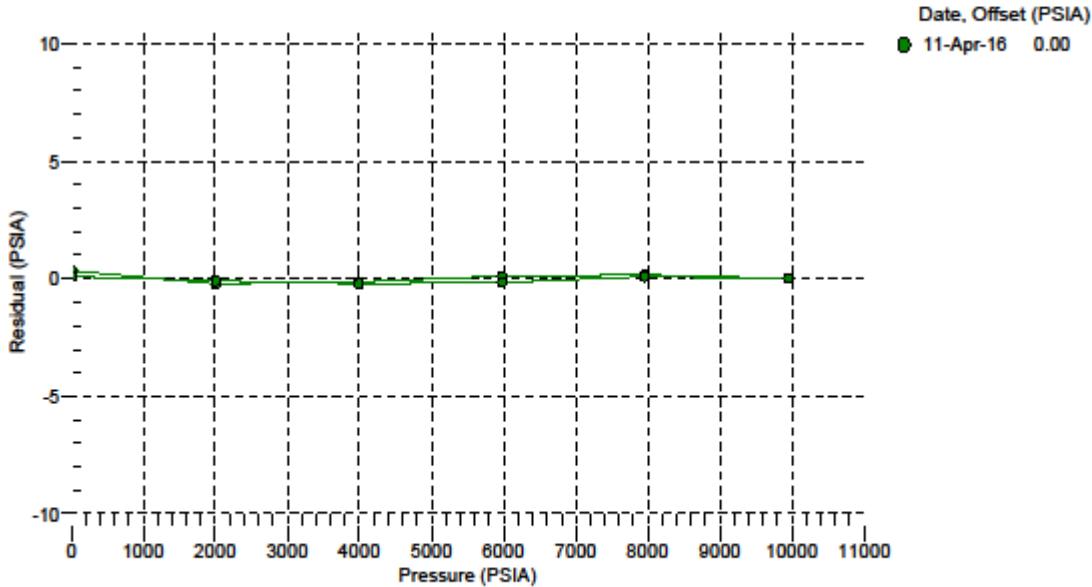

Primary Temperature

Sea-Bird Electronics, Inc.

13431 NE 20th Street, Bellevue, WA 98005-2010 USA

Phone: (+1) 425-643-9866 Fax (+1) 425-643-9954 Email: seabird@seabird.com

SENSOR SERIAL NUMBER: 4573
CALIBRATION DATE: 04-Feb-15

SBE 3 TEMPERATURE CALIBRATION DATA
ITS-90 TEMPERATURE SCALE


ITS-90 COEFFICIENTS:

g = 4.33732836e-003
h = 6.37616781e-004
i = 2.23244862e-005
j = 2.11364089e-006
f₀ = 1000.0

| BATH TEMP (ITS-90) | INSTRUMENT FREQ (Hz) | INST TEMP (ITS-90) | RESIDUAL (ITS-90) |
|-----------------------|-------------------------|-----------------------|----------------------|
| -1.5001 | 2899.996 | -1.5000 | 0.00007 |
| 1.0000 | 3067.907 | 0.9999 | -0.00006 |
| 4.5000 | 3314.668 | 4.4999 | -0.00005 |
| 8.0000 | 3575.412 | 8.0000 | -0.00005 |
| 11.4999 | 3850.524 | 11.5000 | 0.00009 |
| 14.9999 | 4140.368 | 15.0000 | 0.00007 |
| 18.5000 | 4445.313 | 18.5000 | -0.00001 |
| 21.9999 | 4765.695 | 21.9999 | 0.00001 |
| 25.5000 | 5101.868 | 25.4999 | -0.00008 |
| 29.0000 | 5454.150 | 28.9999 | -0.00006 |
| 32.5000 | 5822.861 | 32.5001 | 0.00007 |

$$\text{Temperature ITS-90} = 1/\{ g + h[\ln(f_0/f)] + i[\ln^2(f_0/f)] + j[\ln^3(f_0/f)] \} - 273.15 (\text{°C})$$

Residual = instrument temperature - bath temperature

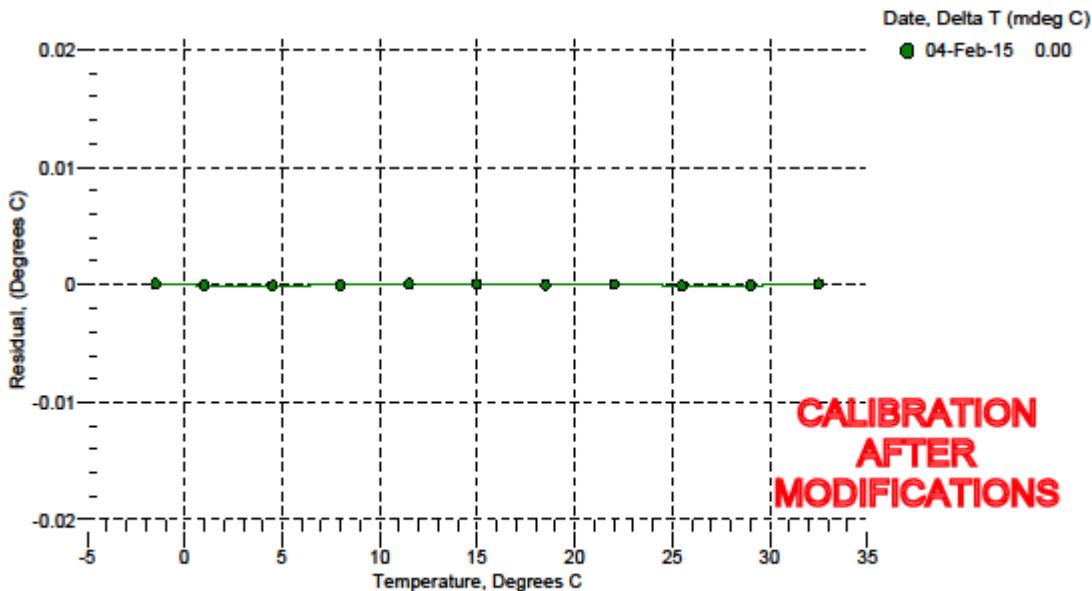

Secondary Temperature

Sea-Bird Electronics, Inc.
13431 NE 20th Street, Bellevue, WA 98005-2010 USA
Phone: (+1) 425-643-9866 Fax (+1) 425-643-9954 Email: seabird@seabird.com

SENSOR SERIAL NUMBER: 5025
CALIBRATION DATE: 22-Apr-15

SBE 3 TEMPERATURE CALIBRATION DATA
ITS-90 TEMPERATURE SCALE


ITS-90 COEFFICIENTS:

g = 4.37632319e-003
h = 6.37757385e-004
i = 2.17047856e-005
j = 1.92752040e-006
f₀ = 1000.0

| BATH TEMP (ITS-90) | INSTRUMENT FREQ (Hz) | INST TEMP (ITS-90) | RESIDUAL (ITS-90) |
|-----------------------|-------------------------|-----------------------|----------------------|
| -1.5001 | 3092.452 | -1.5001 | 0.00003 |
| 0.9999 | 3271.855 | 0.9999 | 0.00001 |
| 4.5000 | 3535.520 | 4.4999 | -0.00007 |
| 8.0000 | 3814.143 | 7.9999 | -0.00007 |
| 11.4999 | 4108.142 | 11.5000 | 0.00009 |
| 14.9999 | 4417.906 | 15.0000 | 0.00007 |
| 18.4999 | 4743.830 | 18.5000 | 0.00006 |
| 22.0000 | 5086.291 | 21.9999 | -0.00006 |
| 25.5000 | 5445.655 | 25.4999 | -0.00007 |
| 29.0000 | 5822.277 | 29.0000 | -0.00003 |
| 32.4999 | 6216.485 | 32.5000 | 0.00006 |

$$\text{Temperature ITS-90} = 1/\{ g + h[\ln(f_0/f)] + i[\ln^2(f_0/f)] + j[\ln^3(f_0/f)] \} - 273.15 (\text{°C})$$

Residual = instrument temperature - bath temperature

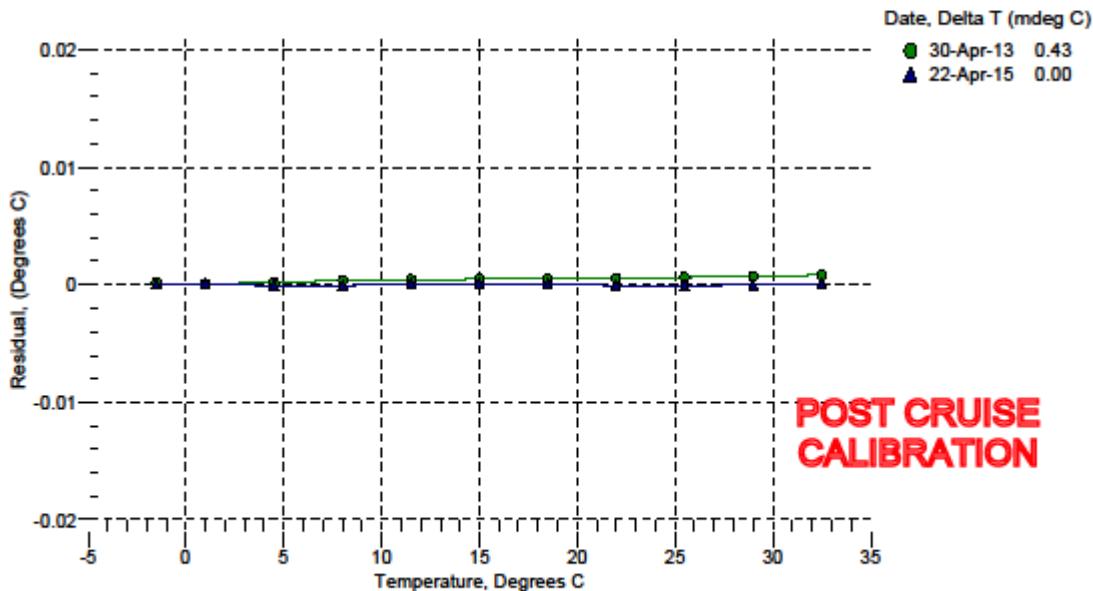

Primary Conductivity

Sea-Bird Electronics, Inc.
 13431 NE 20th Street, Bellevue, WA 98005-2010 USA
 Phone: (+1) 425-643-9866 Fax (+1) 425-643-9954 Email: seabird@seabird.com

SENSOR SERIAL NUMBER: 2065
 CALIBRATION DATE: 23-Jun-15

SBE 4 CONDUCTIVITY CALIBRATION DATA
 PSS 1978: C(35,15,0) = 4.2914 Siemens/meter

COEFFICIENTS:

| | |
|----------------------|--------------------------------|
| g = -9.81886753e+000 | CPcor = -9.5700e-008 (nominal) |
| h = 1.35970463e+000 | CTcor = 3.2500e-006 (nominal) |
| i = -3.26130990e-003 | |
| j = 3.08227604e-004 | |


| BATH TEMP (ITS-90) | BATH SAL (PSU) | BATH COND (Siemens/m) | INST FREQ (kHz) | INST COND (Siemens/m) | RESIDUAL (Siemens/m) |
|-----------------------|-------------------|--------------------------|--------------------|--------------------------|-------------------------|
| 0.0000 | 0.0000 | 0.00000 | 2.69375 | 0.00000 | 0.00000 |
| -1.0000 | 34.5979 | 2.78862 | 5.28272 | 2.78859 | -0.00002 |
| 1.0000 | 34.5983 | 2.95910 | 5.40087 | 2.95913 | 0.00003 |
| 15.0000 | 34.5992 | 4.24779 | 6.22105 | 4.24780 | 0.00001 |
| 18.5000 | 34.5991 | 4.59265 | 6.42260 | 4.59263 | -0.00002 |
| 29.0000 | 34.5966 | 5.67037 | 7.01479 | 5.67038 | 0.00001 |
| 32.5000 | 34.5890 | 6.04082 | 7.20692 | 6.04082 | -0.00000 |

$$f = \text{INST FREQ} / 1000.0$$

$$\text{Conductivity} = (g + h * f^2 + i * f^3 + j * f^4) / (1 + \delta * t + e * p) \text{ Siemens / meter}$$

t = temperatur e[°C]; p = pressure[decibars]; δ = CTcor; e = CPcor;

Residual = instrument conductivity - bath conductivity

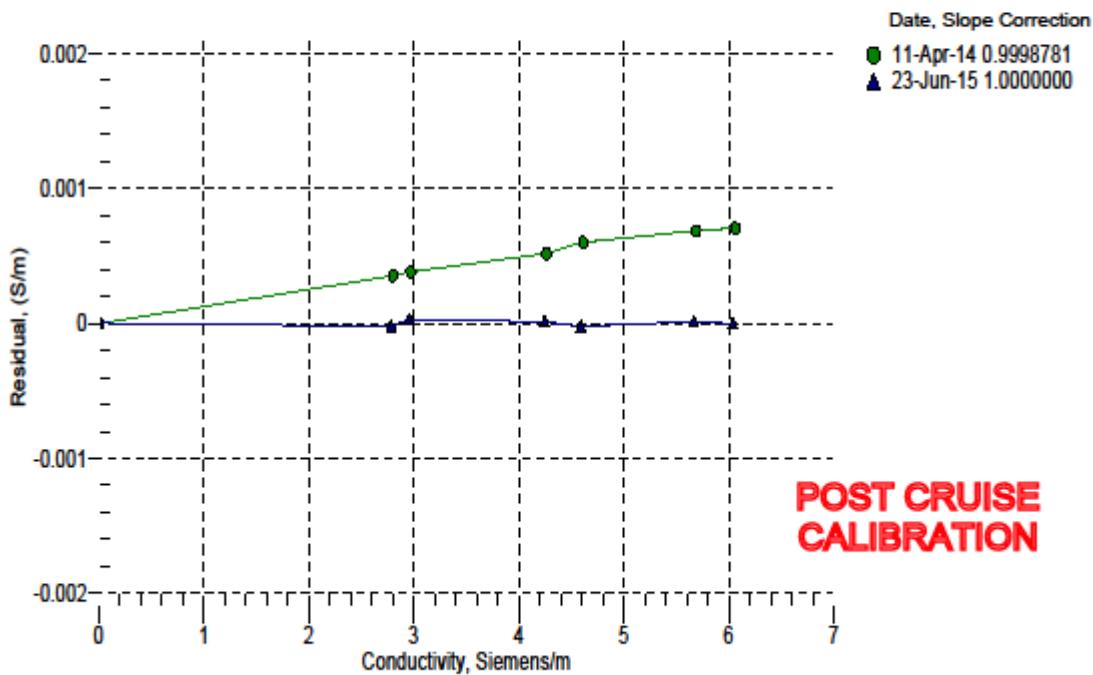

Secondary Conductivity

Sea-Bird Electronics, Inc.
 13431 NE 20th Street, Bellevue, WA 98005-2010 USA
 Phone: (+1) 425-643-9866 Fax (+1) 425-643-9954 Email: seabird@seabird.com

SENSOR SERIAL NUMBER: 2247
 CALIBRATION DATE: 23-Apr-15

SBE 4 CONDUCTIVITY CALIBRATION DATA
 PSS 1978: C(35,15,0) = 4.2914 Siemens/meter

COEFFICIENTS:

| | |
|----------------------|--------------------------------|
| g = -1.03559824e+001 | CPcor = -9.5700e-008 (nominal) |
| h = 1.37305452e+000 | CTcor = 3.2500e-006 (nominal) |
| i = -1.90407591e-003 | |
| j = 2.02896049e-004 | |


| BATH TEMP (ITS-90) | BATH SAL (PSU) | BATH COND (Siemens/m) | INST FREQ (kHz) | INST COND (Siemens/m) | RESIDUAL (Siemens/m) |
|-----------------------|-------------------|--------------------------|--------------------|--------------------------|-------------------------|
| 0.0000 | 0.0000 | 0.00000 | 2.75003 | 0.00000 | 0.00000 |
| -1.0000 | 34.4896 | 2.78070 | 5.28047 | 2.78069 | -0.00001 |
| 1.0000 | 34.4900 | 2.95072 | 5.39678 | 2.95073 | 0.00001 |
| 15.0000 | 34.4906 | 4.23586 | 6.20533 | 4.23589 | 0.00002 |
| 18.5000 | 34.4910 | 4.57985 | 6.40430 | 4.57983 | -0.00002 |
| 29.0000 | 34.4883 | 5.65461 | 6.98925 | 5.65460 | -0.00001 |
| 32.5001 | 34.4797 | 6.02391 | 7.17913 | 6.02392 | 0.00001 |

$$f = \text{INST FREQ} / 1000.0$$

$$\text{Conductivity} = (g + h * f^2 + i * f^3 + j * f^4) / (1 + \delta * t + e * p) \text{ Siemens / meter}$$

t = temperatur e[°C]; p = pressure[decibars]; δ = CTcor; e = CPcor;

Residual = instrument conductivity - bath conductivity

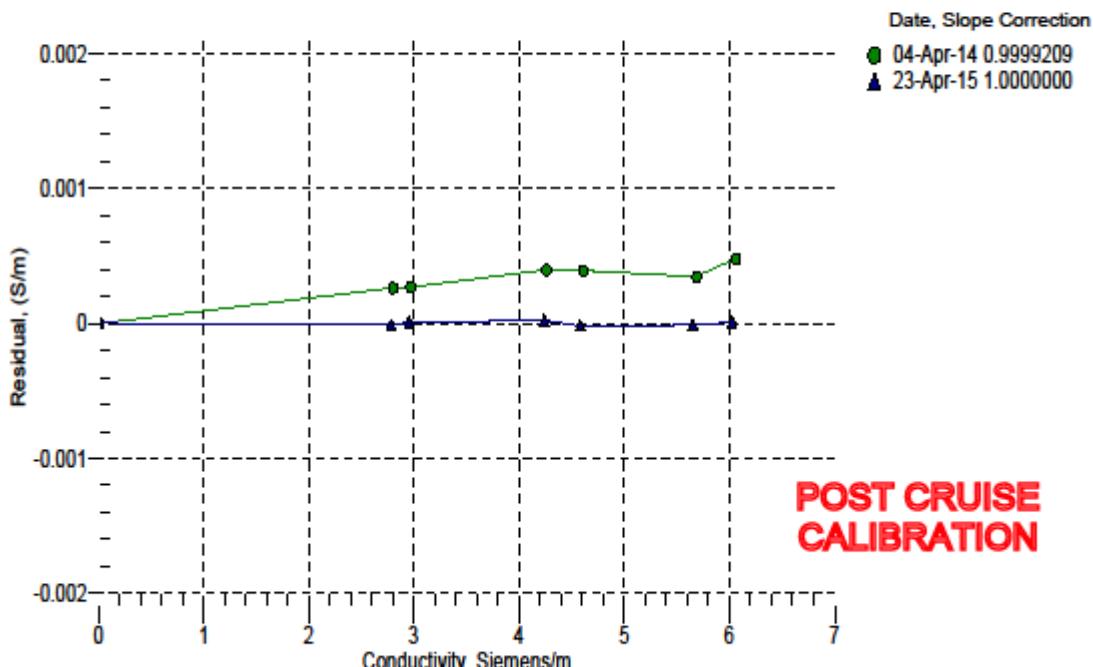

Primary

Dissolved Oxygen

Sea-Bird Electronics, Inc.

13431 NE 20th Street, Bellevue, WA 98005-2010 USA

Phone: (+1) 425-643-9866 Fax (+1) 425-643-9954 Email: seabird@seabird.com

SENSOR SERIAL NUMBER: 0179
CALIBRATION DATE: 02-Aug-16

SBE 43 OXYGEN CALIBRATION DATA

| | | |
|-------------------|-------------------|-----------------------------------|
| COEFFICIENTS: | A = -1.1894e-002 | NOMINAL DYNAMIC COEFFICIENTS |
| Soc = 0.4534 | B = 4.8159e-004 | D1 = 1.92634e-4 H1 = -3.300000e-2 |
| Voffset = -0.4929 | C = -4.7233e-006 | D2 = -4.64803e-2 H2 = 5.00000e+3 |
| Tau20 = 1.10 | E nominal = 0.036 | H3 = 1.45000e+3 |


| BATH OXYGEN (ml/l) | BATH TEMPERATURE (°C) | BATH SALINITY (PSU) | INSTRUMENT OUTPUT (volts) | INSTRUMENT OXYGEN (ml/l) | RESIDUAL (ml/l) |
|--------------------|-----------------------|---------------------|---------------------------|--------------------------|-----------------|
| 1.12 | 6.00 | 0.00 | 0.791 | 1.11 | -0.00 |
| 1.13 | 12.00 | 0.00 | 0.851 | 1.12 | -0.00 |
| 1.14 | 2.00 | 0.00 | 0.757 | 1.13 | -0.01 |
| 1.16 | 26.00 | 0.00 | 0.974 | 1.16 | -0.00 |
| 1.16 | 20.00 | 0.00 | 0.930 | 1.16 | -0.00 |
| 1.17 | 30.00 | 0.00 | 1.007 | 1.17 | 0.00 |
| 3.86 | 12.00 | 0.00 | 1.724 | 3.87 | 0.00 |
| 3.87 | 2.00 | 0.00 | 1.397 | 3.88 | 0.01 |
| 3.88 | 20.00 | 0.00 | 1.962 | 3.88 | 0.00 |
| 3.88 | 30.00 | 0.00 | 2.203 | 3.89 | 0.01 |
| 3.89 | 26.00 | 0.00 | 2.114 | 3.89 | 0.01 |
| 3.89 | 6.00 | 0.00 | 1.536 | 3.89 | 0.00 |
| 6.60 | 30.00 | 0.00 | 3.389 | 6.59 | -0.01 |
| 6.60 | 6.00 | 0.00 | 2.261 | 6.60 | -0.00 |
| 6.61 | 2.00 | 0.00 | 2.032 | 6.61 | -0.00 |
| 6.61 | 12.00 | 0.00 | 2.599 | 6.61 | 0.00 |
| 6.62 | 20.00 | 0.00 | 2.993 | 6.61 | -0.00 |
| 6.62 | 26.00 | 0.00 | 3.248 | 6.62 | -0.00 |

V = instrument output (volts); T = temperature (°C); S = salinity (PSU); K = temperature (°K)

Oxsol(T,S) = oxygen saturation (ml/l); P = pressure (dbar)

Oxygen (ml/l) = Soc * (V + Voffset) * (1.0 + A * T + B * T² + C * T³) * Oxsol(T,S) * exp(E * P / K)

Residual (ml/l) = instrument oxygen - bath oxygen

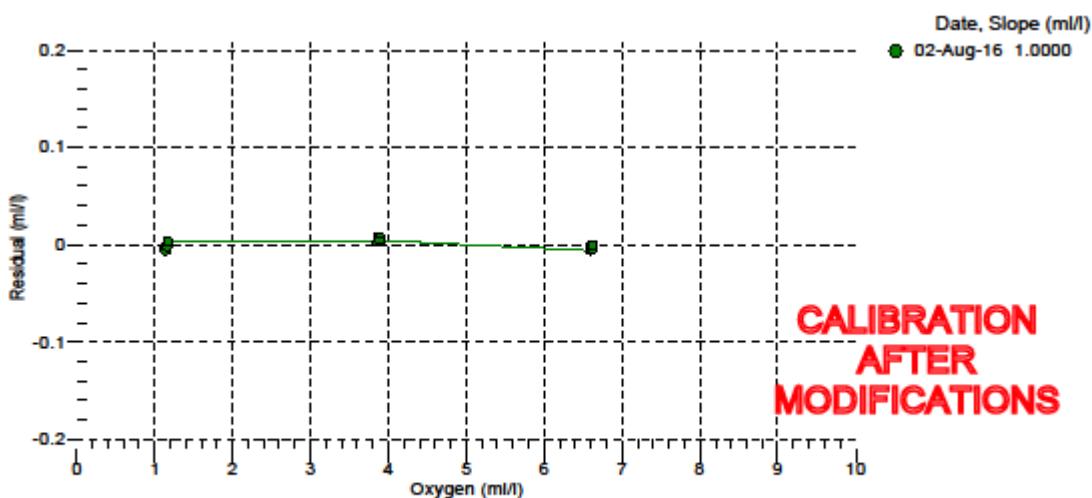

Secondary Dissolved Oxygen

Sea-Bird Electronics, Inc.

13431 NE 20th Street, Bellevue, WA 98005-2010 USA

Phone: (+1) 425-643-9866 Fax (+1) 425-643-9954 Email: seabird@seabird.com

SENSOR SERIAL NUMBER: 0181
CALIBRATION DATE: 27-Apr-16

SBE 43 OXYGEN CALIBRATION DATA

| | | |
|---------------------|---------------------|---------------------------------------|
| COEFFICIENTS: | $A = -3.8157e-003$ | NOMINAL DYNAMIC COEFFICIENTS |
| $Soc = 0.4990$ | $B = 1.6573e-004$ | $D1 = 1.92634e-4$ $H1 = -3.300000e-2$ |
| $Voffset = -0.5068$ | $C = -2.4943e-006$ | $D2 = -4.64803e-2$ $H2 = 5.00000e+3$ |
| $Tau20 = 1.11$ | $E nominal = 0.036$ | $H3 = 1.45000e+3$ |


| BATH OXYGEN (ml/l) | BATH TEMPERATURE (°C) | BATH SALINITY (PSU) | INSTRUMENT OUTPUT (volts) | INSTRUMENT OXYGEN (ml/l) | RESIDUAL (ml/l) |
|--------------------|-----------------------|---------------------|---------------------------|--------------------------|-----------------|
| 1.13 | 6.00 | 0.00 | 0.771 | 1.13 | -0.00 |
| 1.13 | 12.00 | 0.00 | 0.816 | 1.13 | -0.00 |
| 1.15 | 2.00 | 0.00 | 0.745 | 1.14 | -0.00 |
| 1.15 | 26.00 | 0.00 | 0.924 | 1.15 | 0.00 |
| 1.15 | 20.00 | 0.00 | 0.882 | 1.15 | -0.00 |
| 1.16 | 30.00 | 0.00 | 0.962 | 1.16 | 0.00 |
| 3.88 | 30.00 | 0.00 | 2.030 | 3.89 | 0.01 |
| 3.89 | 6.00 | 0.00 | 1.418 | 3.89 | 0.00 |
| 3.90 | 12.00 | 0.00 | 1.571 | 3.90 | 0.00 |
| 3.90 | 20.00 | 0.00 | 1.775 | 3.91 | 0.00 |
| 3.91 | 2.00 | 0.00 | 1.323 | 3.91 | 0.00 |
| 3.91 | 26.00 | 0.00 | 1.935 | 3.92 | 0.01 |
| 6.65 | 26.00 | 0.00 | 2.926 | 6.64 | -0.01 |
| 6.65 | 30.00 | 0.00 | 3.110 | 6.65 | -0.00 |
| 6.67 | 12.00 | 0.00 | 2.327 | 6.67 | -0.00 |
| 6.69 | 2.00 | 0.00 | 1.901 | 6.69 | -0.00 |
| 6.69 | 6.00 | 0.00 | 2.074 | 6.69 | 0.00 |
| 6.70 | 20.00 | 0.00 | 2.681 | 6.70 | 0.00 |

V = instrument output (volts); T = temperature (°C); S = salinity (PSU); K = temperature (°K)

$Oxsol(T,S)$ = oxygen saturation (ml/l); P = pressure (dbar)

$Oxygen (ml/l) = Soc * (V + Voffset) * (1.0 + A * T + B * T^2 + C * T^3) * Oxsol(T,S) * \exp(E * P / K)$

Residual (ml/l) = instrument oxygen - bath oxygen

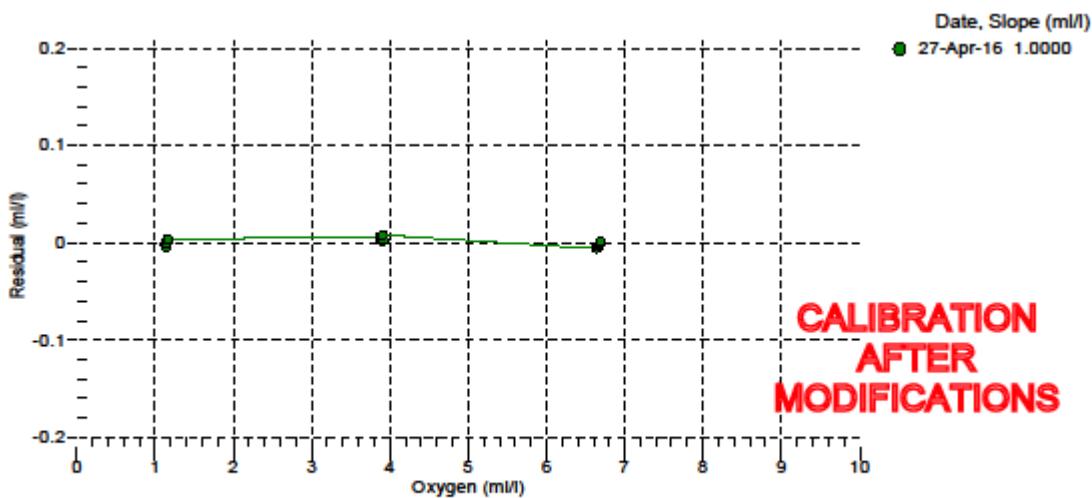

Fluorometer

PO Box 518
620 Applegate St.
Philomath, OR 97370



(541) 929-5650
Fax (541) 929-5277
www.wetlabs.com

ECO Chlorophyll Fluorometer Characterization Sheet

Date: 6/18/2015

S/N: FLRTD-398

Chlorophyll concentration expressed in $\mu\text{g/l}$ can be derived using the equation:

$$\text{CHL } (\mu\text{g/l}) = \text{Scale Factor} * (\text{Output} - \text{Dark Counts})$$

| | Analog Range 1 | Analog Range 2 | Analog Range 4 (default) | Digital |
|-------------------|-------------------|-------------------|--------------------------------|--|
| Dark Counts | 0.099 | 0.055 | 0.032 V | 73 counts |
| Scale Factor (SF) | 6 | 13 | 26 $\mu\text{g}/\text{W}$ | 0.0079 $\mu\text{g}/\text{l}/\text{count}$ |
| Maximum Output | 4.96 | 4.96 | 4.96 V | 16328 counts |
| Resolution | 0.8 | 0.8 | 0.8 mV | 1.0 counts |

Ambient temperature during characterization

22.3 °C

Analog Range: 1 (most sensitive, 0–4,000 counts), 2 (midrange, 0–8,000 counts), 4 (entire range, 0–16,000 counts).

Dark Counts: Signal output of the meter in clean water with black tape over detector.

SF: Determined using the following equation: $SF = x \div (\text{output} - \text{dark counts})$, where x is the concentration of the solution used during instrument characterization. SF is used to derive instrument output concentration from the raw signal output of the fluorometer.

Maximum Output: Maximum signal output the fluorometer is capable of.

Resolution: Standard deviation of 1 minute of collected data.

The relationship between fluorescence and chlorophyll-a concentrations *in-situ* is highly variable. The scale factor listed on this document was determined using a mono-culture of phytoplankton (*Thalassiosira weissflogii*). The population was assumed to be reasonably healthy and the concentration was determined by using the absorption method. To accurately determine chlorophyll concentration using a fluorometer, you must perform secondary measurements on the populations of interest. This is typically done using extraction-based measurement techniques on discrete samples. For additional information on determining chlorophyll concentration see "Standard Methods for the Examination of Water and Wastewater" part 10200 H, published jointly by the American Public Health Association, American Water Works Association, and the Water Environment Federation.

PAR

Biospherical Instruments Inc

CALIBRATION CERTIFICATE

UNDERWATER PAR SENSOR WITH LOG AMPLIFIER

| | | | | | | | | | |
|---|---|---|--------------------------------|-------------------------------------|--------------------|---------------|-----------|--|----------|
| Calibration Date: | 02/17/15 | Job No.: | R12167 | | | | | | |
| Model Number: | QSP2300 | | | | | | | | |
| Serial Number: | 4722 | | | | | | | | |
| Operator: | TPC | | | | | | | | |
| Standard Lamp: | V-033(3/7/12) | | | | | | | | |
| Operating Voltage Range: | 6 | to | 15 VDC (+) | | | | | | |
| Note: The QSP2300 uses a log amplifier to measure the detector signal current with $V = \log I / (Amps) / I_{Ref}$ To calculate irradiance, use this formula: | | | | | | | | | |
| $Irradiance = Calibration factor * (10^8 Light Signal Voltage - 10^8 Dark Voltage)$ | | | | | | | | | |
| With the appropriate (solar corrected) Irradiance Calibration Factor: | | | | | | | | | |
| Dry Calibration Factor: | 2.50E+13 quanta/cm ² ·sec/"amps" | 4.15E-05 μ Einstins/cm ² ·sec/"amps" | | | | | | | |
| Wet Calibration Factor: | 4.41E+13 quanta/cm ² ·sec/"amps" | 7.32E-05 μ Einstcins/cm ² sec/"amps" | | | | | | | |
| Sensor Test Data and Results^{a)} | | | | | | | | | |
| Sensor Supply Current (Dark): | 85.4 mA | | | | | | | | |
| Supply Voltage: | 6 Volts | | | | | | | | |
| Lamp Integrated PAR Irradiance: | 9.34E+15 quanta/cm ² sec | 0.01551 μ Einstins/cm ² sec | | | | | | | |
| SC3 Immersion Coefficient: | 0.5664 | Scalar Correction: | 1 PAR Solar Correction: 1.0000 | | | | | | |
| Nominal Filter OD | Calibrated Trans. | Sensor Voltage | Measured Trans. | Estimated Signal (Amps) | Cal. Output (Amps) | Error (Volts) | Error (%) | Test Irrad. (quanta/cm ² sec) | |
| No Filter | 100.00% | 2.575 | 100.00% | 3.76E-08 | 3.76E-08 | 2.577 | 0.002 | 0.0 | 9.34E+15 |
| 0.3 | 36.10% | 2.138 | 36.27% | 1.36E-08 | 1.36E-08 | 2.137 | 0.000 | -0.5 | 3.39E+15 |
| 0.5 | 27.60% | 2.023 | 27.77% | 1.04E-08 | 1.04E-08 | 2.022 | -0.001 | -0.6 | 2.59E+15 |
| 1 | 9.27% | 1.584 | 9.37% | 3.52E-09 | 3.48E-09 | 1.581 | -0.003 | -1.1 | 8.76E+14 |
| 2 | 1.11% | 0.762 | 1.12% | 4.22E-10 | 4.17E-10 | 0.760 | -0.002 | -1.2 | 1.05E+14 |
| 3 | 0.05% | 0.270 | 0.07% | 2.81E-11 | 2.01E-11 | 0.251 | -0.019 | -28.7 | 6.99E+12 |
| Dark Before: | 0.159 Volts | | | | | | | | |
| Light - No Filter Hldr.: | 2.575 Volts | | | I _{out} = 1.00E-10 Amps | | | | | |
| Dark After - NFH: | 0.199 Volts | | | I _{dark} = 1.58E-10 Amps | | | | | |
| Average Dark | 0.199 Volts | | | 10 ⁸ ucm = 1.581248 Amps | | | | | |
| Notes: 1. Annual calibration is recommended. 2. The collector should be cleaned frequently with alcohol. 4) This section is for internal use and for more advanced analysis. | | | | | | | | | |

QSP200L-QSP2300 (4-2013-.xls

Acquisition and Processing Information

Errors and Events

| Day Of Year | Time (GMT) | Event | Location |
|-------------|------------|---|--------------------------|
| 339 | 04:10 | Started data collection | @68W |
| 339 | 21:34 | ADCP Bottom Tracking Off | Leaving Patagonian Shelf |
| 341 | 17:15 | ADCP Bottom Tracking On | Arriving Antarctic Shelf |
| 342 | 12:51 | Suspend logging of sonars and seawater parameters | @ Palmer Station |
| 345 | 22:39 | Resumed logging of sonars and seawater parameters | Depart Palmer Station |
| 346 | 03:00 | Launched waveglider | 64°48'S by 65°04.5'W |
| 347 | 09:55 | Knudsen Off for mooring ranging | |
| 347 | 11:52 | Knudsen On after ranging | |
| 347 | 12:20 | Found Nitrogen flow at zero. Adjusted regulator | |
| 348 | 11:01 | DAS to Palmer Station mode. ADCP, PCO2, Knudsen OFF | @ Palmer Station |
| 348 | 12:51 | DAS to Underway Mode. ADCP, PCO2, Knudsen ON | Depart Palmer Station |
| 349 | 17:38 | DAS to Palmer Station Mode. ADCP, PCO2, Knudsen OFF | @ Palmer Station |
| 349 | 19:01 | DAS to Underway Mode. ADCP, PCO2, Knudsen ON | Depart Palmer Station |
| 351 | 00:48 | ADCP Bottom Tracking OFF | Depart Antarctic Shelf |
| 351 | 12:58 | Drifter launched at 60S | |
| 352 | 13:34 | Weekly Oxygen system maintenance | |
| 354 | 04:47 | ADCP Bottom Tracking ON | Arrive Patagonian Shelf |
| 354 | 21:38 | End Data Collection | @68W |
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |