

# Data Report NBP1210

**Ken Halanych**

**January 1, 2013 – February 11, 2013**



**RVIB Nathaniel B. Palmer**

**United States Antarctic Program**

**Antarctic Support Contractor**

**Prepared by Kathleen Gavahan, Joe Tarnow**

## Table of Contents

<b>INTRODUCTION</b>	<b>4</b>
<b>DISTRIBUTION CONTENTS AT A GLANCE</b>	<b>5</b>
EXTRACTING DATA .....	6
<b>DISTRIBUTION CONTENTS</b>	<b>7</b>
CRUISE INFORMATION.....	7
<i>Cruise Track</i>	7
<i>Satellite Images</i>	7
NBP DATA PRODUCTS .....	7
<i>JGOFS</i>	8
<i>MGD77</i>	9
SCIENCE OF OPPORTUNITY .....	10
<i>ADCP</i>	10
<i>pCO<sub>2</sub></i>	10
CRUISE SCIENCE.....	11
<i>XBT</i>	11
RVDAS.....	11
<i>Sensors and Instruments</i>	11
Underway Sensors	12
Meteorology and Radiometry	12
Geophysics	12
Oceanography	12
Navigational Instruments	13
<i>Data</i>	13
Underway Data /rvdas/uw	14
Sound Velocity Probe (svp1)	14
Meteorology (mwx1)	14
MET string	14
PUS string	15
SUS string	15
Knudsen (knud)	15
Fluorometer (flr1)	15
pCO <sub>2</sub> (pco2)	16
Micro-TSG (tsg1)	16
Micro-TSG #2 (tsg2)	16
Gravimeter (grv1)	17
Engineering (eng1)	18
Hydro-DAS (hdas)	19
GUV Data (pguv)	19
Remote Temperature (rtmp)	19
Oxygen Data (oxygen)	20
Navigational Data /rvdas/nav	21
Seapath GPS (seap)	21
Trimble (P-Code) GPS (PCOD)	23
Gyro Compass (gyr1)	24
ADCP Course (adcp)	24
Processed Data /process/	25
pCO <sub>2</sub> -merged	25
Calculations	26
PAR .....	26
PSP .....	26
PIR.....	27
<b>ACQUISITION PROBLEMS AND EVENTS</b>	<b>28</b>
<b>APPENDIX: SENSORS AND CALIBRATIONS</b>	<b>29</b>
NBP1210 SHIPBOARD SENSORS .....	29
<i>Gravity Tie</i>	30

<i>Bridge Anemometer</i>	31
<i>Mast Barometer</i>	32
<i>Mast Humidity Sensor</i>	33
<i>Mast Temperature Sensor</i>	34
<i>Mast PIR</i>	35
<i>Mast PSP</i>	36
<i>Mast PAR</i>	37
<i>Mast GUV</i>	38
<i>CTD Fish and Pressure Sensor</i>	39
<i>CTD Conductivity (Primary)</i>	40
<i>CTD Conductivity (Secondary)</i>	41
<i>CTD Temperature (Primary)</i>	42
<i>CTD Temperature (Secondary)</i>	43
<i>Fluorometer</i>	44
<i>Transmissometer</i>	45
<i>Dissolved Oxygen Sensor</i>	46
<i>Dissolved Oxygen Sensor</i>	47
<i>Underwater PAR</i>	48
<i>Oxygen Sensor</i>	49

## Introduction

The NBP data acquisition systems continuously log data from the instruments used during the cruise. This document describes:

- The structure and organization of the data on the distribution media
- The format and contents of the data strings
- Formulas for calculating values
- Information about the specific instruments in use during the cruise
- A log of acquisition problems and events during the cruise that may affect the data
- Scanned calibration sheets for the instruments in use during the cruise.

The data is distributed on a DVD-R written in UDF format. It is readable by most modern computer platforms.

All the data has been compressed using Unix “gzip,” identified by the “.gz” extension. It has been copied to the distribution media in the Unix tar archive format, “.tar” extension. Tools are available on all platforms for uncompressing and de-archiving these formats: On Macintosh, use Stuffit Expander with DropStuff. On Windows operating systems use WinZip.

MultiBeam and raw ADCP data are distributed separately.

*IMPORTANT: Read the last section, “Acquisition Problems and Events,” for important information that may affect the processing of this data.*

## Distribution Contents at a Glance

### Volume 1 of 1: NBP1210

File	Description
/	Root level directory
NBP1210.trk	Text file of cruise track (lat,lon)
NBP1210.mgd	Full Cruise MGD77 data file
NBP1210.gmt	GMT binary file of MGD77 data
INSTCOEF.TXT	Instrument Coefficient File
1210DATA.doc	Data Report NBP1210 (MS Word)
1210DATA.pdf	Data Report NBP1210 (PDF format)
/plots	Cruise track plots
NBP1210-track.ps	Cruise track plot (PostScript format)
NBP1210-track.jpg	Cruise track plot (JPEG format)
NBP1210-track.pdf	Cruise track plot (PDF format)
/process	Processed data
1210JGOF.tar	JGOFS format data files
1210QC.tar	Daily RVDAS QC postscript plots
1210PCO2.tar	Merged pCO2 data files
1210MGD.tar	MGD Data
1210PROC.tar	Other processed data
/rvdas/nav	Navigation data
1210adcp.tar	ADCP Data Sets
1210gyr1.tar	Gyro raw data
1210PCOD.tar	Trimble P-code raw data
1210seap.tar	Seapath data
/rvdas/uw	Underway data
1210bwnc.tar	Baltic Winch data
1210ctdd.tar	CTD Depth data
1210cwnc.tar	Waterfall Winch data
1210eng1.tar	Engineering data
1210grv1.tar	Gravimeter raw data
1210hdas.tar	HydroDAS raw data
1210knud.tar	Knudsen raw data
1210mbdp.tar	Multibeam depth data
1210mwx1.tar	Meteorology raw data
1210oxygen.tar	Oxygen sensor
1210pco2.tar	pCO2 raw data
1210pguv.tar	GUV raw data
1210rtmp.tar	Remote temperature data
1210svp1.tar	Sound velocity probe (in ADCP well)
1210tsg1.tar	Micro TSG data
1210tsg2.tar	2 <sup>nd</sup> Micro TSG data
1210twnc.tar	Winch data
/Imagery	Satellite Imagery
1210Imagery.tar	
/ocean	Ocean data
1210ctd.tar	CTD Data
1210xbt.tar	XBT Data

## Extracting Data

The Unix tar command has many options. It is often useful to know exactly how an archive was produced when expanding its contents. All archives were created using the command,

```
tar -cvf archive_filename files_to_archive
```

To create a list of the files in the archive, use the Unix command,

```
tar -tvf archive_filename > contents.list
```

where `contents.list` is the name of the file to create

To extract the files from the archive:

```
tar -xvf archive_filename file(s)_to_extract
```

G-zipped files will have a “.gz” extension on the filename. These files can be decompressed after de-archiving, using the Unix command,

```
gunzip filename.gz
```

## Distribution Contents

### Cruise Information

NBP1210 departed Punta Arenas, Chile on January 1, 2013

Data logging was started at 1100 GMT on January 3, 2013

Data logging was stopped at 1030 GMT on January 6, 2013

(Return to Punta Arenas, Chile)

Data logging was started at 1426 GMT on January 10, 2013

Data logging was stopped at 0824 GMT on February 8, 2013

### Cruise Track

The distribution DVD includes a GMT cruise track file (NBP1210.trk). It contains the longitude and latitude of the ship's position at one-minute intervals extracted from the NBP1210.gmt file.

JPEG and PDF cruise track files have been produced and placed in the /plots directory.

### Satellite Images

Satellite Images received for this cruise can be found in the file called /Imagery/1210Imagery.tar. Each type of image is contained in a .tar.gz file within that file.

### NBP Data Products

The IT staff on the NBP creates two processed data products for every cruise: JGOFS and MGD77.

The data processing scripts used to produce JGOFS and MGD77 data sets create a lot of intermediate files. These files are included on the data distribution media in a file called /process/1210proc.tar. These files are not intended to be end-products. They are included to make re-processing easier in the event of an error, but no extensive detail of the formats is included in this document. If you have any questions, please contact [itvessel@usap.gov](mailto:itvessel@usap.gov).

**JGOFS**

The JGOFS data set can be found on the distribution media in the file /process/1210jgof.tar. The archive contains one file produced for each day named jgDDD.dat.gz, where DDD is the year-day the data was acquired. The “.gz” extension indicates that the individual files are compressed before archiving. Each daily file consists of 22 columnar fields in text format as described in the table below. The JGOFS data set is created from calibrated data decimated at one-minute intervals. Several fields are derived measurements from more than a single raw input. For example, Course Made Good (CMG) and Speed Over Ground (SOG) are calculated from gyro and GPS inputs. Daily plots during the cruise are produced from the JGOFS data set. Note: Null, unused, or unknown fields are indicated as “NAN” 9999 in the JGOFS data.

Field	Data	Units
01	GMT date	dd/mm/yy
02	GMT time	hh:mm:ss
03	SEAPATH latitude (negative is South)	tt.tttt
04	SEAPATH longitude (negative is West)	ggg.gggg
05	Speed over ground	Knots
06	GPS HDOP	-
07	Gyro Heading	Degrees (azimuth)
08	Course made good	Degrees (azimuth)
09	Mast PAR	$\mu\text{Einsteins/meter}^2 \text{ sec}$
10	Sea surface temperature (remote)	$^{\circ}\text{C}$
11	Sea surface conductivity (TSG1)	siemens/meter
12	Sea surface salinity (TSG1)	PSU
13	Sea depth (uncorrected, calc. sw sound vel. 1500 m/s)	meters
14	True wind speed (max speed windbird)	meters/sec
15	True wind direction (max speed windbird)	degrees (azimuth)
16	Ambient air temperature	$^{\circ}\text{C}$
17	Relative humidity	%
18	Barometric pressure	mBars
19	Sea surface fluorometry	$\mu\text{g/l (mg/m}^3\text{)}$
20	Transmissometer	%
21	PSP	$\text{W/m}^2$
22	PIR	$\text{W/m}^2$



## MGD77

The MGD77 data set is contained in a single file for the entire cruise. It can be found in the top level of the distribution data structure as NBP1210.mgd. The file NBP1210.gmt is created from the MGD77 dataset using the “mgd77togmt” utility. NBP1210.gmt can be used with the GMT plotting package.

The data used to produce the NBP1210.mgd file can be found on the distribution media in the file /process/1210proc.tar. The data files in the archive contain a day's data and follow the naming convention Dddd.fnl.gz, where ddd is the year-day. These files follow a space-delimited columnar format that may be more accessible for some purposes. They contain data at one-second intervals rather than one minute and are individually “gzipped” to save space. Below is a detailed description of the MGD77 data set format. The other files in the archive contain interim processing files and are included to simplify possible reprocessing of the data using the RVDAS NBP processing scripts.

All decimal points are implied. Leading zeros and blanks are equivalent. Unknown or unused fields are filled with 9's. All “corrections”, such as time zone, diurnal magnetics, and EOTVOS, are understood to be added.

Col	Len	Type	Contents	Description, Possible Values, Notes
1	1	Int	Data record type	Set to “5” for data record
2-9	8	Char	Survey identifier	
10-12	3	int	Time zone correction	Corrects time (in characters 13-27) to GMT when added; 0 = GMT
13-16	4	int	Year	4 digit year
17-18	2	int	Month	2 digit month
19-20	2	int	Day	2 digit day
21-22	2	int	Hour	2 digit hour
23-27	5	real	Minutes x 1000	
28-35	8	real	Latitude x 100000	+ = North - = South. (–9000000 to 9000000)
36-44	9	real	Longitude x 100000	+ = East - = West. (–18000000 to 18000000)
45	1	int	Position type code	1=Observed fix 3=Interpolated 9=Unspecified
46-51	6	real	Bathymetry, 2- way travel time	In 10,000th of seconds. Corrected for transducer depth and other such corrections
52-57	6	real	Bathymetry, corrected depth	In tenths of meters.
58-59	2	int	Bathymetric correction code	This code details the procedure used for determining the sound velocity correction to depth
60	1	int	Bathymetric type code	1 = Observed 3 = Interpolated (Header Seq. 12) 9 = Unspecified
61-66	6	real	Magnetics total field, 1 <sup>ST</sup> sensor	In tenths of nanoteslas (gammas)
67-72	6	real	Magnetics total field, 2 <sup>ND</sup> sensor	In tenths of nanoteslas (gammas), for trailing sensor
73-78	6	real	Magnetics residual field	In tenths of nanoteslas (gammas). The reference field used is in Header Seq. 13
79	1	int	Sensor for residual field	1 = 1 <sup>st</sup> or leading sensor 2 = 2 <sup>nd</sup> or trailing sensor 9 = Unspecified

Col	Len	Type	Contents	Description, Possible Values, Notes
80-84	5	real	Magnetics diurnal correction	In tenths of nanoteslas (gammas). (In nanoteslas) if 9-filled (i.e., set to "+9999"), total and residual fields are assumed to be uncorrected; if used, total and residuals are assumed to have been already corrected.
85-90	6	F6.0	Depth or altitude of magnetics sensor	(In meters) + = Below sea level 3 = Above sea level
91-97	7	real	Observed gravity	In 10 <sup>th</sup> of mgals. Corrected for Eotvos, drift, tares
98-103	6	real	EOTVOS correction	In 10 <sup>th</sup> of mgals. $E = 7.5 V \cos \phi \sin \alpha + 0.0042 V^*V$
104-108	5	real	Free-air anomaly	In 10 <sup>th</sup> of mgals G = observed G = theoretical
109-113	5	char	Seismic line number	Cross-reference for seismic data
114-119	6	char	Seismic shot-point number	
120	1	int	Quality code for navigation	5= Suspected, by the originating institution 6= Suspected, by the data center 9= No identifiable problem found

## Science of Opportunity

### ADCP

The shipboard ADCP system measures currents in a depth range from about 30 to 300 m -- in good weather. In bad weather or in ice, the range is reduced, and sometimes no valid measurements are made. ADCP data collection is the OPP-funded project of Eric Firing (University of Hawaii) and Teri Chereskin (Scripps Institution of Oceanography). Data is collected on both the LMG and the NBP for the benefit of scientists on individual cruises, and for the long-term goal of building a profile of current structure in the Southern Ocean.

A data feed is sent from the ADCP system to RVDAS whenever a reference layer is acquired. This feed contains east and north vectors for ship's speed, relative to the reference layer, and ship's heading. Collected files (one per day) are archived in 1210adcp.tar in the directory /rvdas/nav.

### pCO<sub>2</sub>

The NBP carries a pCO<sub>2</sub> measurement system from Lamont-Doherty Earth Observatory (LDEO). pCO<sub>2</sub> data is recorded by RVDAS and transmitted to LDEO at the end of each cruise. You will find pCO<sub>2</sub> data in a file named 1210pco2.tar in the /process directory, which contains the pCO<sub>2</sub> instrument's data merged with GPS, meteorological and other oceanographic measurements. For more information contact Colm Sweeney (csweeney@ldeo.columbia.edu).

## Cruise Science

### ***XBT***

During the cruise, eXpendable BathyThermographs were used to obtain water column temperature profiles, providing corrections to the sound velocity profile for the multibeam system. The data files from these launches are included as 1210xbt.tar in the /ocean directory.

### **RVDAS**

The Research Vessel Data Acquisition System (RVDAS) was developed at Lamont-Doherty Earth Observatory of Columbia University and has been in use on its research ship for many years. It has been extensively adapted for use on the USAP research vessels.

Daily data processing of the RVDAS data is performed to calibrate and convert values into useable units and as a quality-control on operation of the DAS. Raw and processed data sets from RVDAS are included in the data distribution. The tables below provide detailed information on the sensors and data. Be sure to read the “Significant Acquisition Events” section for important information about data acquisition during this cruise.

### ***Sensors and Instruments***

RVDAS data is divided into two general categories, *underway and navigation*. They can be found on the distribution media as subdirectories under the top level rvdas directory: /rvdas/uw, and /rvdas/nav. Processed oceanographic data is in the top level directory, /process. Each instrument or sensor produces a data file named with its channel ID. Each data file is g-zipped to save space on the distribution media. Not all data types are collected every day or on every cruise.

The naming convention for data files produced by the sensors and instruments is

NBP[CruiseID][ChannelID].dDDD

Example:     NBP1210.mwx1.d025

- The CruiseID is the numeric name of the cruise, in this case, NBP1210.
- The ChannelID is a 4-character code representing the system being logged. An example is “mwx1,” the designation for meteorology.
- DDD is the day of year the data was collected

## Underway Sensors

### Meteorology and Radiometry

Measurement	Channel ID	Collect. Status	Rate	Instrument
Air Temperature	mwx1	continuous	1 sec	R.M. Young 41372LC
Relative Humidity	mwx1	continuous	1 sec	R.M. Young 41372LC
Wind Speed/Direction	mwx1	continuous	1 sec	Gill 1390-PK-007
Barometer	mwx1	continuous	1 sec	R.M. Young 61208
PIR (LW radiation)	mwx1	continuous	1 sec	Eppley PIR
PSP (SW radiation)	mwx1	continuous	1 sec	Eppley PSP
PAR	mwx1	continuous	1 sec	BSI QSR-240
GUV	pguv	continuous	2 sec	BSI PUV-2511
PUV	pguv	not collected		BSI PUG-2500

### Geophysics

Measurement	Channel ID	Collect. Status	Rate	Instrument
Gravimeter	grv1	continuous	10 sec*	LaCoste & Romberg
Magnetometer	mag1	not collected	15 sec	EG&G G-866
Bathymetry	knud	continuous	Varies	Knudsen 320B/R

\*Data is output every second but it only changes every 10 seconds.

### Oceanography

Measurement	Channel ID	Collect. Status	Rate	Instrument
Conductivity	mtsg	Continuous	6 sec	SeaBird SBE-45
Salinity	mtsg	Continuous	6 sec	Calc. from pri. temp
Sea Surface Temp	mtsg	Continuous	6 sec	SeaBird 3-01/S
Fluorometry	hdas	Continuous	2 sec	WET Lab AFL
Transmissometry	hdas	Continuous	2 sec	WET Lab C-Star
pCO <sub>2</sub>	pco2	Continuous	70 sec	(LDEO)
ADCP	adcp	Continuous	varies	RD Instruments
Oxygen	oxyg	Continuous	10 sec	Oxygen Optode 3835

## **Navigational Instruments**

Measurement	Channel ID	Collect. Status	Rate	Instrument
Trimble GPS	PCOD	Continuous	1 sec	Trimble 20636-00SM
Gyro	gyr1	Continuous	0.2 sec	Yokogawa Gyro
SeaPath	seap	Continuous	1 sec	SeaPath 200

## ***Data***

Data is received from the RVDAS system via RS-232 serial connections. A time tag is added at the beginning of each line of data in the form,

```
yy+dd:hh:mm:ss.sss [data stream from instrument]
```

where

yy       = two-digit year  
ddd      = day of year  
hh       = 2 digit hour of the day  
mm       = 2 digit minute  
ss.sss   = seconds

All times are reported in UTC.

The delimiters that separate fields in the raw data files are often spaces and commas but can be other characters such as : = @. Occasionally no delimiter is present. Care should be taken when reprocessing the data that the field's separations are clearly understood.

In the sections below a sample data string is shown, followed by a table that lists the data contained in the string.

## **Underway Data** /rvdas/uw

Each section below describes a type of data file (file name extension in parentheses) followed by a typical line of data in the file. In the table(s) for each section is a description of the fields within each line of data. Note: most data files listed below will be included with each cruise's data distribution; however some types of files may be omitted if the instrument was not operating during the cruise. The available data files can be found in the /rvdas/uw directory on the distribution disc.

### **Sound Velocity Probe (svp1)**

08+330:00:00:49.011 1519.35

Field	Data	Units
1	RVDAS Time tag	
2	Sound velocity in ADCP sonar well	m/s

### **Meteorology (mwx1)**

There are 3 different data strings in the mwx1 data file:

MET

08+330:23:59:57.725 MET,12.1,-54,6.64,88.7,111.3374,0.02414567,-  
0.4827508,282.9581,281.8823,1005.119

PUS

08+330:23:59:58.546 PUS,A,020,008.53,M,+337.12,+009.00,00,0F

SUS

08+330:23:59:58.779 SUS,A,017,008.76,M,+335.53,+006.35,00,02

### **MET string**

Field	Data	Units
1	RVDAS time tag	
2	MET (string flag)	
3	Power Supply Voltage	V
4	Enclosure Relative Humidity	%
5	Air temperature	°C
6	Air Relative Humidity	%
7	PAR (photosynthetically available radiation)*	mV
8	PSP (short wave radiation)*	mV
9	PIR Thermopile (long wave radiation)*	mV
10	PIR Case Temperature	°Kelvin
11	PIR Dome Temperature	°Kelvin
12	Barometer	mBar

\*See page 21 for calculations.

## PUS string

Field	Data	Units
1	RVDAS time tag	
2	PUS (string flag)	
3	A (unit identification)	
4	Port Wind direction relative	deg
5	Port Wind speed relative	m/s
6	Units	
7	Sound Speed	m/s
8	Sonic Temperature	°C
9	Unit Status (00 or 60 are good, any other value indicates fault)	
10	Check Sum	

## SUS string

Field	Data	Units
1	RVDAS time tag	
2	SUS (string flag)	
3	A (unit identification)	
4	Starboard Wind direction relative	deg
5	Starboard Wind speed relative	m/s
6	Units	
7	Sound Speed	m/s
8	Sonic Temperature	°C
9	Unit Status (00 or 60 are good, any other value indicates fault)	
10	Check Sum	

## Knudsen (knud)

99+099:00:18:19.775 HF,305.2,LF,304.3

Field	Data	Units
1	RVDAS time tag	
2	HF = High frequency flag (12 kHz)	
3	High frequency depth	meters
4	LF = Low frequency flag (3.5 kHz)	
5	Low frequency depth	meters

## Fluorometer (flr1)

This Fluorometer is not in use. The current Fluorometer goes to the hdas string.

00+019:23:59:58.061 0 0818 :: 1/19/00 17:23:17 = 0.983 (RAW) 1.2 (C)

Field	Data	Units
1	RVDAS time tag	
2	Marker 0 to 8	
3	4-digit index	
4	Date	mm/dd/yy
5	Time	hh:mm:ss
6	Signal	
7	Signal units of measurement	
8	Cell temperature (if temperature compensation package is installed)	
9	Temperature units (if temperature compensation package is installed)	

**pCO<sub>2</sub> (pco2)**

00+021:23:59:43.190 2000021.99920 2382.4 984.2 30.73 50.8 345.9 334.1 -1.70  
 -68.046 -144.446 Equil

Field	Data	Units
1	RVDAS time tag	
2	pCO <sub>2</sub> time tag (decimal is fractional time of day)	yyyyddd.ttt
3	Raw voltage (IR)	mV
4	Cell temperature	°C
5	Barometer	MBar
6	Concentration	ppm
7	Equilibrated temperature	°C
8	pCO <sub>2</sub> pressure	microAtm
9	Flow rate	ml / min
10	Source ID #	1 or 2 digits
11	Valve position	1 or 2 digits
12	Flow source (Equil = pCO <sub>2</sub> measurement)	text

**Micro-TSG (tsg1)**

08+330:23:59:40.894 5.9322, 3.34685, 34.0550, 1473.281

Field	Data	Units
1	RVDAS time tag	
2	Internal Temperature	°C
3	Conductivity	s/m
4	Salinity	PSU
5	Sound velocity	m/s

**Micro-TSG #2 (tsg2)**

08+330:23:59:40.894 5.9322, 3.34685, 34.0550, 1473.281

Field	Data	Units
1	RVDAS time tag	
2	Internal Temperature	°C
3	Conductivity	s/m
4	Salinity	PSU
5	Sound velocity	m/s



## Gravimeter (grv1)

There are now two sets of fields output by the gravity meter. The data record is output once per second, and identified by "\$DAT" in the id field. A summary of sensor environmental data is output every ten seconds, identified by "%ENV" in the id field.

### Data record (\$DAT):

05+194:00:00:27.995 \$DAT,2005/ 7/13, 0: 7: 7.36,194, 9050.37, 9050.06, 5410.86, -0.00, -0.01, -0.02, 0.00, 0.00, 0.70, 0.19, -0.12, -0.25, 0.00, -69.45711315, -54.32181487, 0.000, 285.200,

Field	Data	Conversion	Units
1	RVDAS time tag		
2	Text string (id field)	\$DAT for data record	
3	Date	YYYY/MM/DD	
4	Time	HH:MM:SS.SS	
5	Day of Year	DDD	
6	Gravity count	mgal = count x 1.0046 + offset	count
7	Spring Tension		CU
8	Beam Position	Volts x 750,000	
9	VCC		
10	AL		
11	AX		
12	VE		
13	AX2		
14	XACC2		
15	LACC2		
16	CROSS ACCEL		GAL
17	LONG ACCEL		GAL
18	EOTVOS CORR		MGAL
19	LONGITUDE		Degrees
20	LATITUDE		Degrees
21	HEADING		Degrees
22	VELOCITY		Knots

**Environmental record (\$ENV)**

05+183:19:13:10.945 %ENV,2005/ 7/ 2,19:19:52.16,183,S-036/V1.5, 3.34,  
 47.19, 20.34,1.111840E-1,-0.57700,-0.10591, 0.40180, 2.55260, 0.43000, 1,  
 300

Field	Data	Conversion	Units
1	RVDAS time tag		
2	Text string (id field)	\$ENV for environmental record	
3	Date	YYYY/MM/DD	
4	Time	HH:MM:SS.SS	
5	Day of Year	DDD	
6	Meter ID		
7	Meter Pressure		inch-Hg
8	Meter temp		°C
9	Ambient temp		°C
10	K-Factor		
11	VCC Coeff		
12	AL Coeff		
13	AX Coeff		
14	VE Coeff		
15	AX2 Coeff		
16	Serial Filter Length		Seconds
17	QC Filter Length		Seconds

**Engineering (eng1)**

08+330:23:59:50.899 12.25684 23.89813 0.4029922 0.2541656 233.4218 -  
 751.9 -8145.28 -1.386184 23.37653 23.37653 NAN

Field	Data	Units
1	RVDAS time tag	
2	Power Supply Voltage	V
3	Internal Case Temperature	°C
4	Pump #1 flow rate	L/min
5	Pump #2 flow rate	L/min
6	Pump #3 flow rate	L/min
7	Seismic air pressure	Lbs/sq-in
8	PIR case resistance (not currently hooked up, data is irrelevant)	Kohm
9	PIR case ratiometric output (not currently hooked up, data is irrelevant)	mV
10	Freezer #1 temperature	°C
11	Freezer #2 temperature	°C
12	Freezer #3 temperature	°C

\*See page 24 for PIR calculations.

**Hydro-DAS (hdas)**

08+330:23:59:41.877 12.15836 14.22853 368.9655 4060.69 -1 65.5 65.5 80  
57

Field	Data	Units
1	RVDAS time tag	
2	Supply voltage	V
3	Panel temperature	°C
4	Fluorometer	mV
5	Transmissometer	mV
6	Sea Water Valve (-1 = stern thruster valve, 0 = moon pool valve)	
7	Flow meter 1 frequency	Hz
8	Flow meter 2 frequency	Hz
9	Flow meter 3 frequency	Hz
10	Flow meter 4 frequency	Hz

**GUV Data (pguv)**

08+330:23:59:40.328 112508 235940 .000197 1.856E-1 1.116E0 4.987E-2 -  
1.959E-4 1.637E0 4.153E-3 1.76E0 42.296 17.844

Field	Data	Units
1	RVDAS time tag	
2	Date	mmddyy
3	Time (UTC)	hhmmss
4	Ed0Gnd	V
5	Ed0320	uW (cm <sup>2</sup> nm)
6	Ed0340	uW (cm <sup>2</sup> nm)
7	Ed0313	uW (cm <sup>2</sup> nm)
8	Ed0305	uW (cm <sup>2</sup> nm)
9	Ed0380	uW (cm <sup>2</sup> nm)
10	Ed0PAR	uE (cm <sup>2</sup> nm)
11	Ed0395	uW (cm <sup>2</sup> nm)
12	Ed0Temp	°C
13	Ed0Vin	V

**Remote Temperature (rtmp)**

07+272:00:00:15.960 -1.7870

Field	Data	Units
1	RVDAS time tag	
2	Temperature at seawater intake	°C

## Oxygen Data (oxyg)

Internal reference salinity is set to 34 ppt. For further information on this data, contact Sharon Stammerjohn, [ssammer@ucsc.edu](mailto:ssammer@ucsc.edu).

11+011:00:21:48.109 MEASUREMENT 3835 1424 Oxygen: 334.01  
 Saturation: 90.71 Temperature: -0.78 DPhase: 37.65  
 BPhase: 35.95 RPhase: 0.00 BAmp: 212.13 BPot:  
 30.00 RAmp: 0.00 RawTem.: 788.05

Field	Data	Units
1	RVDAS time tag	
2-4	Measurement ID, Model Number, Serial Number	alphanumeric
5	Oxygen heading	text
6	Oxygen Reading	μM
7	Saturation heading	text
8	Saturation Reading	%
9	Temperature heading	text
10	Water Temperature	°C
11	Dphase heading	text
12	Dphase	Raw numeric
13	Rphase heading	Text
14	Rphase	Raw numeric
15	Bamp heading	Text
16	Bamp	Raw numeric
17	Bpot heading	Text
18	Bpot	Raw numeric
19	Ramp heading	Text
20	Ramp	Raw numeric
21	RawTem heading	Text
22	RawTemp	V

## **Navigational Data** /rvdas/nav

### **Seapath GPS (seap)**

The Seapath GPS outputs the following data strings, four in NMEA format and two in proprietary PSXN format:

- GPZDA
- GPGGA
- GPVTG
- GPHDT
- PSXN, 20
- PSXN, 22
- PSXN, 23

#### **GPZDA**

02+253:00:00:00.772 \$GPZDA,235947.70,09,09,2002,,\*7F

Field	Data	Units
1	RVDAS time tag	
2	\$GPZDA	
3	time	hhmmss.ss
4	Day	dd
5	Month	mm
6	Year	yyyy
7	(empty field)	
8	Checksum	

#### **GPGGA**

02+253:00:00:00.938

GPGGA,235947.70,6629.239059,S,06827.668899,W,1,07,1.0,11.81,M,,M,,\*6F

Field	Data	Units
1	RVDAS time tag	
2	\$GPGGA	
3	time	hhmmss.ss
4	Latitude	ddmm.mmmmmm
5	N or S for north or south latitude	
6	Longitude	ddmm.mmmmmm
7	E or W for east or west longitude	
8	GPS quality indicator, 0=invalid, 1=GPS SPS, 2=DGPS, 3=PPS, 4=RTK, 5=float RTK, 6=dead reckoning	
9	number of satellites in use (00-99)	
10	HDOP	x.x
9	height above ellipsoid in meters	m.mm
11	M	
12	(empty field)	
13	M	
14	age of DGPS corrections in seconds	s.s
15	DGPS reference station ID (0000-1023)	
16	Checksum	

## GPVTG

02+253:00:00:00.940 \$INVTG,19.96,T,,M,4.9,N,,K,A\*39

Field	Data	Units
1	RVDAS time tag	
2	\$GPVTG	
3	course over ground, degrees true	d.dd
4	T	
5	,	
6	M	
7	speed over ground in knots	k.k
8	N	
9	,	
10	K	
11	Mode	
12	Checksum	

## GPHDT

02+253:00:00:00.941 \$GPHDT,20.62,T\*23

Field	Data	Units
1	RVDAS time tag	
2	\$GPHDT	
3	Heading, degrees true	d.dd
4	T	
5	Checksum	

## PSXN,20

02+253:00:00:00.942 \$PSXN,20,0.43,0.43\*39

Field	Data	Units
1	RVDAS time tag	
2	\$PSXN	
3	20	
4	Horizontal position & velocity quality: 0=normal, 1=reduced performance, 2=invalid data	
5	Height & vertical velocity quality: 0=normal, 1=reduced performance, 2=invalid data	
6	Heading quality: 0=normal, 1=reduced performance, 2=invalid data	
7	Roll & pitch quality: 0=normal, 1=reduced performance, 2=invalid data	
8	Checksum	

## PSXN,22

02+253:00:00:00.942 \$PSXN,22,0.43,0.43\*39

Field	Data	Units
1	RVDAS time tag	
2	\$PSXN	
3	22	
4	gyro calibration value since system start-up in degrees	d.dd
5	short term gyro offset in degrees	d.dd
6	Checksum	

**PSXN,23**

02+253:00:00:02.933 \$PSXN,23,0.47,0.57,20.62,0.03\*0C

Field	Data	Units
1	RVDAS time tag	
2	\$PSXN	
3	23	
4	roll in degrees, positive with port side up	d.dd
5	pitch in degrees, positive with bow up	d.dd
6	Heading, degrees true	d.dd
7	heave in meters, positive down	m.mm
8	Checksum	

**Trimble (P-Code) GPS (PCOD)**

The Trimble GPS, which formerly output Precise Position (*P-Code*) strings, but now only outputs Standard Position (*Civilian*) strings, outputs three NMEA standard data strings:

- Position fix (GGA)
- Latitude / longitude (GLL),
- Track and ground speed (VTG)

**GGA: GPS Position Fix – Geoid/Ellipsoid**

01+319:00:04:11.193 \$GPGGA,000410.312,6227.8068,S,06043.6738,W,1,06,1.0,031.9,M,-017.4,M,,\*49

Field	Data	Units
1	RVDAS Time tag	
2	\$GPGGA	
3	UTC time at position	hhmmss.sss
4	Latitude	ddmm.mmm
5	North (N) or South (S)	
6	Longitude	ddmm.mmm
7	East (E) or West (W)	
8	GPS quality: 0 = Fix not available or invalid 1 = GPS, SPS mode, fix valid 2 = DGPS (differential GPS), SPS mode, fix valid 3 = P-CODE PPS mode, fix valid	
9	Number of GPS satellites used	
10	HDOP (horizontal dilution of precision)	
11	Antenna height	meters
12	M for meters	
13	Geoidal height	meters
14	M for meters	
15	Age of differential GPS data (no data in the sample string)	
16	Differential reference station ID (no data in the sample string)	
17	Checksum (no delimiter before this field)	

**GLL: GPS Latitude/Longitude**

01+319:00:04:11.272 \$GPGLL,6227.8068,S,06043.6738,W,000410.312,A\*32

Field	Data	Units
1	RVDAS Time tag	
2	\$GPGLL	
3	Latitude	degrees
4	North or South	
5	Longitude	degrees
6	East or West	
7	UTC of position	hhmmss.sss
8	Status of data (A = valid)	
9	Checksum	

**VTG: GPS Track and Ground Speed**

01+319:00:04:11.273 \$GPVTG,138.8,T,126.0,M,000.0,N,000.0,K\*49

Field	Data	Units
1	RVDAS time tag	
2	\$GPVTG	
3	Heading	degrees
4	Degrees true (T)	
5	Heading	degrees
6	Degrees magnetic (M)	
7	Ship speed	knots
8	N = knots	
9	Speed	km/hr
10	K = km per hour	
11	Checksum	

**Gyro Compass (gyr1)**

00+019:23:59:59.952 \$HEHDT 25034,-020\*73

Field	Data	Units
1	RVDAS time tag	
2	\$HEHDT	
3	Heading, Degrees True	degrees
5	Checksum	

**ADCP Course (adcp)**

00+019:23:59:59.099 \$PUHAW,UVH,-1.48,-0.51,250.6

Field	Data	Units
1	RVDAS time tag	
2	\$PUHAW	
3	UVH (E-W, N-S, Heading)	
4	Ship Speed relative to reference layer, east vector	knots
5	Ship Speed relative to reference layer, north vector	knots
6	Ship heading	degrees



**Processed Data** /process/**pCO<sub>2</sub>-merged**

00+346:23:58:20.672 2000346.9991 2398.4 1008.4 0.01 45.4 350.3 342.6 15.77

Equil -43.6826 173.1997 15.51 33.90 0.33 5.28 9.05 1007.57 40.0 14.87 182.44 -1

Field	Data	Units
1	RVDAS time tag	
2	pCO <sub>2</sub> time tag (decimal is fractional time of day)	yyyyddd.tt
3	Raw voltage (IR)	mV
4	Cell temperature	°C
5	Barometer	MBar
6	Flow rate	ml / min
7	Concentration	ppm
8	pCO <sub>2</sub> pressure	microAtm
9	Equilibrated temperature	°C
10	Sea Water Temp	1 or 2 digits
11	Valve position	°C
12	Flow source (Equil = pCO <sub>2</sub> measurement)	text
13	RVDAS latitude	degrees
14	RVDAS longitude	degrees
15	TSG external temperature	°C
16	TSG 1 salinity	PSU
17	Fluorometer	V
18	RVDAS true wind speed	m/s
19	RVDAS true wind direction	degrees
20	Barometric Pressure	mBars
21	Uncontaminated seawater pump flow rate	l/min
22	Speed over ground	knots
23	Course made good	degrees
24	Oxygen	μM
25	TSG 2 internal temperature	°C
26	TSG 2 salinity	PSU
27	TSG 1 internal temperature	°C
28	H2O Input Source	-1 stern thruster 0 moonpool

## Calculations

The file `instrument.coeff` located in the `/` directory contains the calibration factors for shipboard instruments. This was the file used by the RVDAS processing software.

## PAR

Coefficients `parc1` and `parcv` for this cruise can be found in the `instrument.coeff` file as the variable labeled PAR, respectively. Variable `par` is the raw data in mV, as described in the “mw1” file description. The calibration scale and probe offset dark are values taken from the PAR Cal Sheet.

```
par = raw data mV
calibration scale = 5.8644 V/(μEinstiens/cm2sec)
parc1 = 1 / scale = .17
probe offset dark = -.1 mV
parcv = dark x 1000 mV/V = -0.0001 V
((par / 1000 mV/V) - parcv) x parc1 x 10000 cm2/m2 = μEinstiens/m2sec
```

Calculations (extracted from the C code):

```
/* Convert from mV to V */
par /= 1000;
/* (par V - vdark V) / Calibration Scale Factor V/uE/cm2sec */
parCalc = (par - parcv) * parc1 * 10000;
```

## PSP

Coefficient `pspCoeff` for this cruise can be found in the `instrument.coeff` file as the variable labeled PSP1. Variable `psp` is the raw data in mV, as described in the “mw1” file description.

```
psp = raw data mV
calibration scale = pspCoeff x 10^-6 V/(W/m2)
psp / (scale x 1000 mV/V) = W/m2
```

Calculations (extracted from the C code):

```
/* Convert from mV to W/m^2 */
pspCalc = (psp * 1000 / pspCoeff);
```

## PIR

Coefficient `pirCoeff` for this cruise can be found in the `instrument.coeff` file as the variable labeled PIR1. Variable `pir_thermo` is the raw data in mV, `pir_case` is the PIR case temperature in Kelvins and `pir_dome` is the PIR dome temperature in Kelvins, as described in the “mw1” file description. Hard-coded “C” coefficients are shown below:

```
Dome constant = 3.5
```

```
Sigma = 5.6704e-8
```

```
pir_thermo = raw data mV
```

```
calibration scale = pirCoeff x 10-6 V/(W/m2)
```

```
pir_thermo / (scale x 1000 mV/V) = W/m2
```

Calculations (extracted from the C code):

```
/* convert mV to W/m^2 */  
pirCalc = (pir_thermo * 1000 / pirCoeff)  
/* correct for case temperature */  
pirCalc += sigma * pow(pir_case,4)  
/* correct for dome temperature */  
pirCalc -= 3.5 * sigma * (pow(pir_dome, 4) - pow(pir_case, 4))
```

## Acquisition Problems and Events

This section lists problems with acquisition noted during this cruise including instrument failures, data acquisition system failures and any other factor affecting this data set. The format is ddd:hh:mm (ddd is year-day, hh is hour, and mm is minute). Times are reported in GMT.

Start	End	Description
		Gravity meter is not calibrated and is giving incorrect values. In for repair.
11:00 January 3, 2013		Started Logging (exiting Chilean EEZ)
	10:30 January 6, 2013	Stopped Logging (enter Chilean EEZ)
14:26 January 10, 2013		Started Logging (exiting Chilean EEZ)
	08:24 February 8, 2013	Stopped Logging

## Appendix: Sensors and Calibrations

### NBP1210 Shipboard Sensors

<i>Sensor</i>	<i>Serial Number</i>	<i>Last Calibration</i>	<i>Comments</i>
<b>Meteorology &amp; Radiometers</b>			
Bridge Anemometer (RMY)	WM 115659	10/27/2011	Installed 11/18/2011.
Stbd Anemometer (Gill US)	847014	9/29/2010	Installed 11/17/2010
Port Anemometer (Gill US)	924057	11/18/09	Installed 3/5/2010
Barometer	00872	3/9/2010	Installed 11/16/2011
Humidity/Wet Temp	06134	6/23/2011	Installed 7/30/2012
PIR	32845F3	4/12/2011	Installed 6/17/2011
PSP	32850F3	4/11/2011	Installed 6/17/2011
Mast PAR	6356	8/4/2011	Installed 7/30/2012
GUV (Mast)	25110203113	7/29/2011	Installed 7/31/2012
<b>CTD</b>			
CTD Fish	0328	08/19/2011	12/28/2012
CTD Fish Pressure	53980	08/19/2011	12/28/2012
CTD Deck Unit	11P19858-0768	N/A	11/08/07
Slip-Ring Assembly	1.406	N/A	3/27/04
Carousel Water Sampler	3214153-0140	N/A	12/28/2012
Pump (primary)	051626 3.0K	3/11/2011	12/28/2012
Pump (secondary)	051627 3.0K	3/11/2011	12/28/2012
Temperature (primary)	031457	7/20/2011	12/28/2012
Temperature (secondary)	032367	7/25/2012	12/28/2012
Conductivity (primary)	042067	7/20/2011	12/28/2012
<b>Underway</b>			
Micro-TSG	4550449-0242	8/31/2010	Installed 9/5/2011
Micro-TSG #2	4546167-0199	3/11/2011	Installed 12/15/2011
Digital Remote Temp (Primary)	3846730-0323	5/18/2010	Installed 11/16/2011
Fluorometer	AFLD-011	10/6/2010	Installed 9/5/2011
Transmissometer	CST-831DR	6/28/2010	Installed 12/10/11

**Gravity Tie****Gravity Tie Spreadsheet**

The fields outlined in **BOLD MUST BE FILLED IN** for this spreadsheet to operate properly.  
The automatically calculated values show up in the shaded fields.

Date: **3/7/2012**  
 Location: **Punta Arenas, Chile**  
 Station: **Harbour Admin. Bldg.**  
 Latitude: **53 09 S**  
 Longitude: **070 55 W**  
 Elevation:  
 Gravity: **981320.82**

Reference Code Numbers:  
 Station no. **9337-50**  
 ISGN no. **51230N**

	Value	Time (GMT)
Ship's meter before gravity tie ( Gravity (cu) )	8974.9	17:01
Ship's meter after gravity tie ( Gravity (cu) )	8974.9	18:01
Average	8974.9	
Ship Gravimeter's Calibration Constant	1.0046	
Corrected ship's meter ( QC Grav (mgal) )	9915.2	

	Value	Time (GMT)
Ship's meter before gravity tie (serial, RVDAS)	8974.9	17:03
Ship's meter after gravity tie (serial, RVDAS)	8974.9	18:02
Average (for comparison check only)	8974.9	

Portable Gravimeter Interval Factor **1.01007** From Table 1 of Model G #807 Meter

Station	Value	Time (GMT)	Temp	Date	OBS mgal, averaged
Pier measurement 1	4917.64	17:23	54	March 7, 2012	
Pier measurement 2	4917.62	17:24	54	March 7, 2012	4962.15
Pier measurement 3	4917.63	17:25	54	March 7, 2012	
Average	4917.63				
Station measurement 1	4918.43	17:36	54	March 7, 2012	OBS mgal, averaged
Station measurement 2	4918.41	17:37	54	March 7, 2012	4962.54
Station measurement 3	4918.39	17:38	54	March 7, 2012	
Average	4918.41				
Pier measurement 4	4917.70	17:36	54	March 7, 2012	OBS mgal, averaged
Pier measurement 5	4917.63	17:52	54	March 7, 2012	4962.13
Pier measurement 6	4917.67	17:55	54	March 7, 2012	
Average	4917.67				

Gravity offset from last tie **972302.62**  
 Drift since last tie **3.29**

**OBS Differences**

Station to Pier (1, 2, & 3 averaged) **49.79**  
 Station to Pier (4, 5, & 6 averaged) **49.79**  
 Averaged Differences **49.77**  
 Gravity at pier **981229.38**  
 Elevation of pier above gravimeter, meters **0.0**  
 Earth differential gravity, mgal/meter **0.3**  
 Gravity at ship's gravimeter **981229.05**  
 Gravity Offset (for RVDAS) **972302.62**

**Comments**

Tie done by Sheldon Blackman prior to NBP1203. Very stable conditions on pier. Pier elevation exactly even with ship's gravimeter.

**Note about Elevation of Pier:** If pier is below the ship's gravimeter, this value is negative. If above, positive.

**Bridge Anemometer****RM Young Anemometer Calibration, Model 05106**

S/N: 45835

Date: 27-Sep-04

Cal'd By: W. Gallagher

Clockwise Cal Motor RPM	Calculated Windspeed m/s	Measured Windspeed m/s	Delta m/s	Knots
0	0.00	0.0	0.0	0.0
200	0.98	0.9	0.1	1.9
500	2.45	2.3	0.2	4.8
1000	4.90	4.8	0.1	9.5
1500	7.35	7.3	0.0	14.3
2000	9.80	9.7	0.1	19.0
3000	14.70	14.7	0.0	28.6
4000	19.60	19.7	-0.1	38.1
5000	24.50	24.6	-0.1	47.6
6000	29.40	29.7	-0.3	57.1
7000	34.30	34.7	-0.4	66.6
8000	39.20	39.7	-0.5	76.2
9000	44.10	44.7	-0.6	85.7
10000	49.00	49.6	-0.6	95.2
12000	58.80	59.6	-0.8	114.2

Direction	Measured Direction	Delta Direction
0	0	0
30	28	2
60	59	1
90	89	1
120	119	1
150	150	0
180	180	0
210	210	0
240	240	0
270	270	0
300	300	0
330	330	0
0	0	0

**Note:** Delta direction should not exceed + or - 3 degrees.

Counter Clockwise Cal Motor RPM	Calculated Windspeed m/s	Measured Windspeed m/s	Delta m/s
0	0.00	0.0	0.0
200	0.98	0.9	0.1
500	2.45	2.3	0.2
1000	4.90	4.9	0.0
1500	7.35	7.3	0.0
2000	9.80	9.8	0.0
3000	14.70	14.7	0.0
4000	19.60	19.8	-0.2
5000	24.50	24.7	-0.2
6000	29.40	29.8	-0.4
7000	34.30	34.7	-0.4
8000	39.20	39.7	-0.5
9000	44.10	44.7	-0.6
10000	49.00	49.7	-0.7
12000	58.80	59.6	-0.8

**Caution:** Do Not exceed 12000 rpm during Wind Speed test.

Wind Speed Threshold < 2.9 gm?   
 Wind Direction Threshold < 30 gm?

**Additional Comments**

Installed new housing assy. and wind direction coupling. Adjusted clearance on wind direction potentiometer thumbwheel.

**Note:** Delta Windspeed should not exceed + or - 0.3 m/s for 0 - 5000 rpm

**Mast Barometer**

**R.M. Young Company**  
2801 Aero Park Drive  
Traverse City, Michigan 49686 USA



**CALIBRATION REPORT**  
**Barometric Pressure Sensor**

Customer: *Raytheon Technical Services Company LLC*

Test Number: 1510-01B  
Test Date: 10 May 2011

Customer PO: RR57542-01  
Sales Order: 1906

Test Sensor:

Model: 61201      Serial Number: *BP01705*  
Description: Barometric Pressure Sensor

Report of calibration comparison of test barometric pressure sensor with National Institute of Standards and Technology traceable standard pressure calibrator at five pressures in the R.M. Young Company controlled pressure facility. Calibration accuracy  $\pm 1.0$  hPa.

Reference Pressure (hPa)	Voltage Output (millivolts)	Indicated (1) Pressure (hPa)
800.0	0	800.0
875.0	1251	875.1
950.0	2501	950.1
1025.0	3749	1024.9
1100.0	4997	1099.8

(1) Calculated from voltage output

All reference equipment used in this calibration procedure have been tested by comparison to traceable standards certified by the National Institute of Standards and Technology.

Reference Instrument

Druck Pressure Controller Model DPI515  
Fluke Multimeter Model 8060A

Serial # NIST Test Reference

51500497      UKAS Lab 0221  
4865407      234027

Tested By: *E. Channing*

METEOROLOGICAL INSTRUMENTS  
Tel: 231-946-3980 Fax: 231-946-4772 Email: met.sales@youngusa.com Website: youngusa.com  
ISO 9001:2008 CERTIFIED



**Mast Humidity Sensor**

**R.M. Young Company**  
2801 Aero Park Drive  
Traverse City, Michigan 49686 USA

**CALIBRATION REPORT**  
**Relative Humidity Sensor**

Customer: *Raytheon Technical Services Company LLC*

Test Number: 1623-01R  
Test Date: 23 June 2011

Customer PO: RR59338-01  
Sales Order: 1983

Test Sensor:

Model: 41372LC      Serial Number: TS06134  
Description: Temperature/Relative Humidity Sensor

Report of calibration comparison of test relative humidity sensor with National Institute of Standards and Technology traceable standard relative humidity sensor at five humidity levels in the R.M. Young Company controlled humidity chamber facility. Calibration accuracy  $\pm 2.0$  %.

Reference Humidity (%)	Current Output (milliamps)	Indicated (1) Humidity (%)
10.4	5.9	11.9
30.3	8.9	30.4
50.3	12.2	51.3
70.4	15.3	70.4
89.6	17.9	86.9

(1) Calculated from voltage output

All reference equipment used in this calibration procedure have been tested by comparison to traceable standards certified by the National Institute of Standards and Technology.

Reference Instrument

Vaisala Humidity Sensor Model 35AC  
Fluke Multimeter Model 8060A

Serial # NIST Test Reference

N475040      TN 266152  
4865407      234027

Tested By: EChenney

M E T E O R O L O G I C A L   I N S T R U M E N T S

Tel: 231-946-3980 Fax: 231-946-4772 Email: met.sales@youngusa.com Website: youngusa.com

**Mast Temperature Sensor**

**R.M. Young Company**  
2801 Aero Park Drive  
Traverse City, Michigan 49686 USA

**CALIBRATION REPORT**  
**Temperature Sensor**

Customer: *Raytheon Technical Services Company LLC*

Test Number: 1623-01T  
Test Date: 23 June 2011

Customer PO: RR59338-01  
Sales Order: 1983

Test Sensor:

Model: 41372LC      Serial Number: *TS06134*  
Description: Temperature/Relative Humidity Sensor

Report of calibration comparison of test temperature sensor with National Institute of Standards and Technology traceable standard thermometers at three temperatures in the R.M. Young Company controlled temperature calibration bath facilities. Calibration accuracy  $\pm 0.1^\circ$  Celsius.

Bath Temperature (degrees C)	Current Output (milliamps)	Indicated (1) Temperature (degrees C)
-49.81	4.031	-49.81
0.03	12.003	0.02
50.29	20.046	50.29

(1) Calculated from current output

All reference equipment used in this calibration procedure have been tested by comparison to traceable standards certified by the National Institute of Standards and Technology.

Reference Instrument	Serial #	NIST Test Reference
Brooklyn Thermometer Model 43-FC	8006-118	204365
Brooklyn Thermometer Model 22332-D5-FC	25071	249763
Brooklyn Thermometer Model 2X400-D7-FC	77532	228060
Keithley Multimeter Model 191	15232	234027

Tested By: *EChenney*

M E T E O R O L O G I C A L   I N S T R U M E N T S  
Tel: 231-946-3980 Fax: 231-946-4772 Email: met.sales@youngusa.com Website: youngusa.com  
ISO 9001:2008 CERTIFIED

**Mast PIR****THE EPPLEY LABORATORY, INC.**

12 Sheffield Avenue, PO Box 419, Newport, Rhode Island USA 02840  
Phone: 401.847.1020 Fax: 401.847.1031 Email: info@eppleylab.com

**STANDARDIZATION OF  
EPPLEY PRECISION INFRARED RADIOMETER  
Model PIR**

Serial Number: 32845F3

Resistance: 713  $\Omega$  at 23°C

Temperature Compensation Range: -20° to + 40°C

This pyrocometer has been compared against Eppley's Blackbody Calibration System under radiation intensities of approximately 200 watts meter<sup>-2</sup> and an average ambient temperature of 22°C as measured by Standard Omega Temperature Probe, RTD#1.

As a result of a series of comparisons, it has been found to have a sensitivity of:

$$4.11 \times 10^{-6} \text{ volts/watts meter}^{-2}$$

The calculation of this constant is based on the fact that the relationship between radiation intensity and emf is rectilinear to intensities of 700 watts meter<sup>-2</sup>. This radiometer is linear to within  $\pm 1.0\%$  up to this intensity.

The calibration of this instrument is traceable to the International Practical Temperature Scale (IPTS) through a precision low-temperature blackbody.

Eppley recommends a minimum calibration cycle of five (5) years but encourages annual calibrations for highest measurement accuracy. Unless otherwise stated in the remarks section below or on the Sales Order, the results are "AS FOUND / AS LEFT".

Shipped to: Raytheon Polar Services NSF  
Port Hueneme, CA

Date of Test: April 12, 2011

S.O. Number: 62959

Date: April 14, 2011

In Charge of Test:

Reviewed by:

Remarks:

**Mast PSP****THE EPPLEY LABORATORY, INC.**

12 Sheffield Avenue, PO Box 419, Newport, Rhode Island USA 02840  
Phone: 401.847.1020 Fax: 401.847.1031 Email: info@eppleylab.com

**STANDARDIZATION OF  
EPPLEY PRECISION SPECTRAL PYRANOMETER  
Model PSP**

Serial Number: 32850F3

Resistance: 706  $\Omega$  at 23°C

Temperature Compensation Range: -20° to +40°C

This radiometer has been compared with Standard Precision Spectral Pyranometer, Serial Number 21231F3 in Eppley's Integrating Hemisphere under radiation intensities of approximately 700 watts meter<sup>-2</sup> (roughly one half a solar constant).

As a result of a series of comparisons, it has been found to have a sensitivity of:

$$7.87 \times 10^{-6} \text{ volts/watts meter}^{-2}$$

The calculation of this constant is based on the fact that the relationship between radiation intensity and emf is rectilinear to intensities of 1400 watts meter<sup>-2</sup>. This radiometer is linear to within  $\pm 0.5\%$  up to this intensity.

The calibration of this instrument is traceable to standard self-calibrating cavity pyrheliometers in terms of the Systems Internationale des Unites (SI units), which participated in the Tenth International Pyrheliometric Comparisons (IPC X) at Davos, Switzerland in September-October 2005.

Eppley recommends a minimum calibration cycle of five (5) years but encourages annual calibrations for highest measurement accuracy. Unless otherwise stated in the remarks section below or on the Sales Order, the results are "AS FOUND / AS LEFT".

Useful conversion facts: 1 cal cm<sup>-2</sup> min<sup>-1</sup> = 697.3 watts meter<sup>-2</sup>  
1 BTU/ft<sup>2</sup>-hr<sup>-1</sup> = 3.153 watts meter<sup>-2</sup>

Shipped to: Raytheon Polar Services NSF  
Port Hueneme, CA

S.O. Number: 62958  
Date: April 14, 2011

Remarks:

Date of Test: April 11, 2011

In Charge of Test:

Reviewed by:

*Debra L. Shultz*  
*Thomas J. Kreh*

**Mast PAR**

PAR for Mast

**Biospherical Instruments Inc.****CALIBRATION CERTIFICATE**

Calibration Date 8/4/2011  
 Model Number QSR-240  
 Serial Number 6356  
 Operator TPC  
 Standard Lamp GS-1024(7/22/11)  
 Probe Excitation Voltage Range: 6 to 18 VDC(+)  
 Output Polarity: Positive

Probe Conditions at Calibration(in air):

Calibration Voltage: 6 VDC(+)  
 Probe Current: 1.2 mA

Probe Output Voltage:

Probe Illuminated 97.2 mV  
 Probe Dark 0.1 mV  
 Probe Net Response 97.0 mV  
 RG780 0.3 mV

Corrected Lamp Output:

Output In Air (same condition as calibration):

9.298E+15 quanta/cm<sup>2</sup>sec  
0.01544 uE/cm<sup>2</sup>sec

Calibration Scale Factor:

(To calculate irradiance, divide the net voltage reading in Volts by this value.)

Dry: 1.0436E-17 V/(quanta/cm<sup>2</sup>sec)  
6.2847E+00 V/(uE/cm<sup>2</sup>sec)

Notes:

1. Annual calibration is recommended.
2. Calibration is performed using a Standard of Spectral Irradiance traceable to the National Institute of Standards and Technology (NIST).
3. The collector should be cleaned frequently with alcohol.
4. Calibration was performed with customer cable, when available.

QSR240R 05/24/95



**Mast GUV**

Biospherical Instruments Inc.

**GU-2511 Calibration Certificate**

System Serial Number	25110203114	Date of Calibration	6/30/10
Calibration database	25110203114v6.mdb	Date of Certificate	6/30/2010
DASSN	0089	Standard of Spectral Irradiance	GS1019(e/2808)
Microprocessor Tag Number	4	Operator	TC

Monochromator Channels	Address	Wavelength [nm]	Responsivity [amps per $\mu\text{W}/(\text{cm}^2\cdot\text{nm})$ ]	ScaleSmall [Volts per $\mu\text{W}/(\text{cm}^2\cdot\text{nm})$ ]	ScaleMedium [Volts per $\mu\text{W}/(\text{cm}^2\cdot\text{nm})$ ]	ScaleLarge [Volts per $\mu\text{W}/(\text{cm}^2\cdot\text{nm})$ ]	OffsetSmall [Volts]	OffsetMedium [mVolts]	OffsetLarge [Volts]	Measurement Units
Ed0320	2	320	2.4004E-10	2.4540E-05	7.1712E-03	2.2634E+00	6.8001E-06	6.7000E-06	5.7000E-04	$\mu\text{W}/(\text{cm}^2\cdot\text{nm})$
Ed0340	6	340	1.8655E-10	1.8334E-05	5.8485E-03	1.9377E+00	8.8000E-05	1.0000E-04	9.6100E-04	$\mu\text{W}/(\text{cm}^2\cdot\text{nm})$
Ed0313	8	313	2.1900E-10	2.2272E-05	6.5382E-03	2.2644E+00	9.7600E-04	9.0600E-04	-1.8750E-03	$\mu\text{W}/(\text{cm}^2\cdot\text{nm})$
Ed0305	10	305	1.1300E-11	1.1477E-06	3.3530E-04	1.1525E-01	3.9800E-04	3.9900E-04	1.2460E-03	$\mu\text{W}/(\text{cm}^2\cdot\text{nm})$
Ed0380	12	380	8.2707E-11	8.4361E-06	2.4947E-03	7.9062E-01	3.0400E-04	2.8600E-04	-1.1200E-04	$\mu\text{W}/(\text{cm}^2\cdot\text{nm})$
Ed0395	18	395	2.9427E-10	3.0018E-05	8.7385E-03	2.7720E+00	4.0100E-04	4.0700E-04	1.6210E-03	$\mu\text{W}/(\text{cm}^2\cdot\text{nm})$
Broadband Channels	Address	Wavelength [nm]	Responsivity [amps per $\mu\text{E}/(\text{cm}^2\cdot\text{s})$ ]	ScaleSmall [Volts per $\mu\text{E}/(\text{cm}^2\cdot\text{s})$ ]	ScaleMedium [Volts per $\mu\text{E}/(\text{cm}^2\cdot\text{s})$ ]	ScaleLarge [Volts per $\mu\text{E}/(\text{cm}^2\cdot\text{s})$ ]	OffsetSmall [Volts]	OffsetMedium [mVolts]	OffsetLarge [Volts]	Measurement Units
Ed0PAR	13	400-700	1.7323E-05	1.7899E+00	5.1021E+02	1.0244E+05	5.9300E-04	5.8500E-04	-8.0400E-04	$\mu\text{E}/(\text{cm}^2\cdot\text{s})$
Auxiliary Channels	Address	Wavelength	Responsivity	ScaleS	ScaleM	ScaleL	OffsetS	OffsetM	OffsetL	Measurement Units
Ed0Temp	22	0	1.0000E+00	1.0000E-02	1.0000E-02	1.0000E-02	0.0000E+00	0.0000E+00	0.0000E+00	C
Ed0VIn	27	0	1.0000E+00	-2.5000E-01	-2.5000E-01	-2.5000E-01	0.0000E+00	0.0000E+00	0.0000E+00	V

© Biospherical Instruments Inc., 5340 Riley Street, San Diego, California 92110 USA. Contact [support@biospherical.com](mailto:support@biospherical.com) for more information.

Calibration Data - Do Not Destroy

page 2 of 2

**CTD Fish and Pressure Sensor****SEA-BIRD ELECTRONICS, INC.**

13431 NE 20th Street, Bellevue, Washington, 98005-2010 USA

Phone: (425) 643 - 9866 Fax (425) 643 - 9954 Email: seabird@seabird.com

SENSOR SERIAL NUMBER: 0328  
CALIBRATION DATE: 19-Aug-11SBE9plus PRESSURE CALIBRATION DATA  
10000 psia S/N 53980

## DIGIQUARTZ COEFFICIENTS:


C1 = -5.847002e+004  
 C2 = 6.910390e-001  
 C3 = 1.753360e-002  
 D1 = 4.241600e-002  
 D2 = 0.000000e+000  
 T1 = 3.026040e+001  
 T2 = -1.938830e-004  
 T3 = 4.330190e-006  
 T4 = 2.020250e-009  
 T5 = 0.000000e+000

## AD590M, AD590B, SLOPE AND OFFSET:

AD590M = 1.13300e-002  
 AD590B = -8.47592e+000  
 Slope = 0.99998  
 Offset = -0.8777 (dbars)

PRESSURE (PSIA)	INST OUTPUT(Hz)	INST TEMP(C)	INST OUTPUT (PSIA)	CORRECTED INST OUTPUT (PSIA)	RESIDUAL (PSIA)
14.646	33053.38	23.5	16.091	14.818	0.172
2015.118	33613.29	23.6	2016.419	2015.104	-0.014
4015.087	34162.38	23.6	4016.439	4015.082	-0.005
6015.115	34701.27	23.7	6016.559	6015.161	0.046
8015.276	35230.45	23.7	8016.782	8015.342	0.066
10015.529	35750.28	23.7	10016.841	10015.359	-0.169
8015.286	35230.46	23.7	8016.833	8015.393	0.108
6015.178	34701.29	23.8	6016.622	6015.224	0.046
4015.109	34162.39	23.8	4016.460	4015.104	-0.005
2015.058	33613.25	23.8	2016.279	2014.965	-0.093
14.643	33053.28	23.8	15.764	14.491	-0.152

Residual = corrected instrument pressure - reference pressure

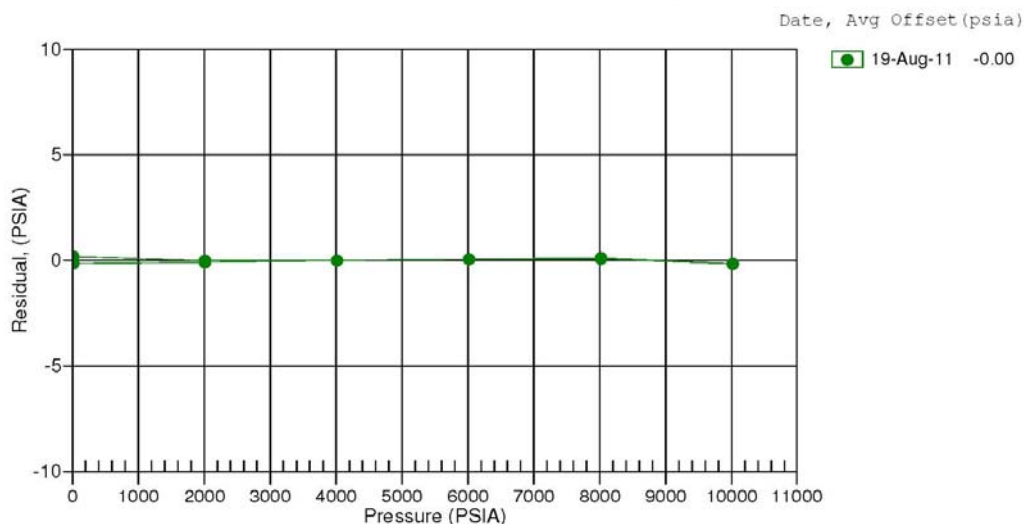

**CTD Conductivity (Primary)****SEA-BIRD ELECTRONICS, INC.**

13431 NE 20th Street, Bellevue, Washington, 98005-2010 USA

Phone: (425) 643 - 9866 Fax (425) 643 - 9954 Email: seabird@seabird.com

SENSOR SERIAL NUMBER: 2067  
CALIBRATION DATE: 01-Apr-11SBE4 CONDUCTIVITY CALIBRATION DATA  
PSS 1978: C(35,15,0) = 4.2914 Siemens/meter**GHIJ COEFFICIENTS**


$g = -1.01947535e+001$   
 $h = 1.43571244e+000$   
 $i = -3.86196291e-003$   
 $j = 3.61555637e-004$   
 $CP_{cor} = -9.5700e-008$  (nominal)  
 $CT_{cor} = 3.2500e-006$  (nominal)

**ABCDM COEFFICIENTS**

$a = 2.08372738e-008$   
 $b = 1.42405930e+000$   
 $c = -1.01658444e+001$   
 $d = -6.41002792e-005$   
 $m = 7.8$   
 $CP_{cor} = -9.5700e-008$  (nominal)

BATH TEMP (ITS-90)	BATH SAL (PSU)	BATH COND (Siemens/m)	INST FREQ (kHz)	INST COND (Siemens/m)	RESIDUAL (Siemens/m)
0.0000	0.0000	0.00000	2.67195	0.00000	0.00000
-1.0000	34.9711	2.81588	5.18718	2.81586	-0.00002
0.9999	34.9714	2.98795	5.30232	2.98797	0.00002
15.0000	34.9716	4.28864	6.10210	4.28866	0.00002
18.5000	34.9716	4.63674	6.29874	4.63671	-0.00003
28.9999	34.9674	5.72426	6.87653	5.72427	0.00001
32.5000	34.9563	6.09763	7.06382	6.09763	-0.00000

$$\text{Conductivity} = (g + hf^2 + if^3 + jf^4) / (10(1 + \delta t + \epsilon p)) \text{ Siemens/meter}$$
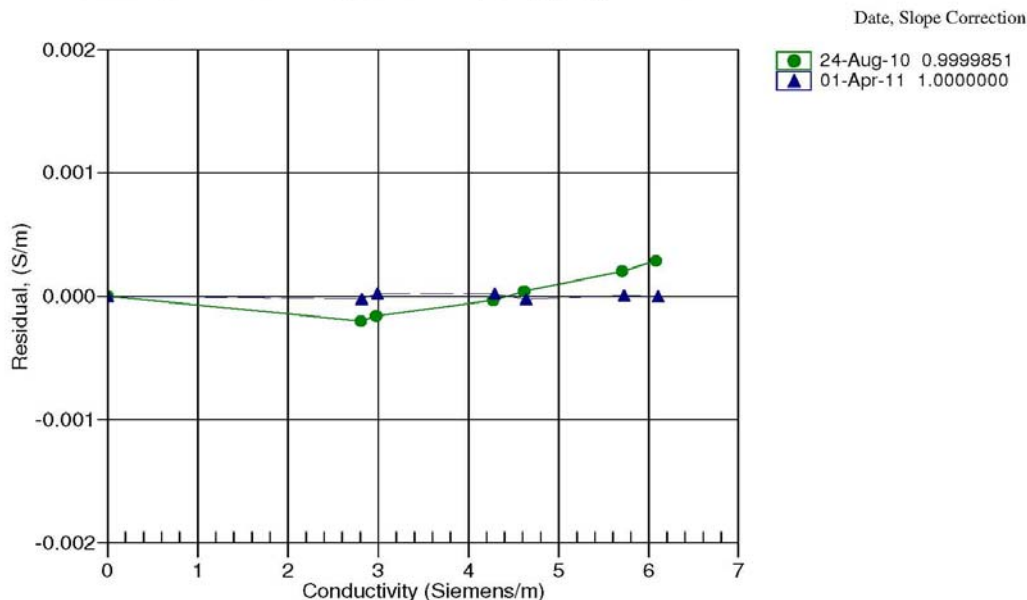
$$\text{Conductivity} = (af^m + bf^2 + c + dt) / [10(1 + \epsilon p)] \text{ Siemens/meter}$$
 $t = \text{temperature}[^{\circ}\text{C}]; p = \text{pressure}[\text{decibars}]; \delta = CT_{cor}; \epsilon = CP_{cor};$ 
 $\text{Residual} = (\text{instrument conductivity} - \text{bath conductivity}) \text{ using } g, h, i, j \text{ coefficients}$ 




**CTD Conductivity (Secondary)****SEA-BIRD ELECTRONICS, INC.**

13431 NE 20th Street, Bellevue, Washington, 98005-2010 USA

Phone: (425) 643 - 9866 Fax (425) 643 - 9954 Email: seabird@seabird.com

SENSOR SERIAL NUMBER: 1798  
CALIBRATION DATE: 01-Apr-11SBE4 CONDUCTIVITY CALIBRATION DATA  
PSS 1978: C(35,15,0) = 4.2914 Siemens/meter**GHIJ COEFFICIENTS**


$g = -4.11856962e+000$   
 $h = 4.80967997e-001$   
 $i = -4.37504969e-004$   
 $j = 4.82455827e-005$   
 $CP_{cor} = -9.5700e-008$  (nominal)  
 $CT_{cor} = 3.2500e-006$  (nominal)

**ABCDM COEFFICIENTS**

$a = 2.97328203e-006$   
 $b = 4.79479988e-001$   
 $c = -4.11363304e+000$   
 $d = -8.38204670e-005$   
 $m = 4.8$   
 $CP_{cor} = -9.5700e-008$  (nominal)

BATH TEMP (ITS-90)	BATH SAL (PSU)	BATH COND (Siemens/m)	INST FREQ (kHz)	INST COND (Siemens/m)	RESIDUAL (Siemens/m)
0.0000	0.0000	0.00000	2.92891	0.00000	0.00000
-1.0000	34.9711	2.81588	8.19499	2.81591	0.00003
0.9999	34.9714	2.98795	8.40988	2.98794	-0.00000
15.0000	34.9716	4.28864	9.88201	4.28858	-0.00006
18.5000	34.9716	4.63674	10.23948	4.63673	-0.00001
28.9999	34.9674	5.72426	11.28158	5.72441	0.00015
32.5000	34.9563	6.09763	11.61688	6.09753	-0.00010

$$\text{Conductivity} = (g + hf^2 + if^3 + jf^4) / (10(1 + \delta t + \epsilon p)) \text{ Siemens/meter}$$
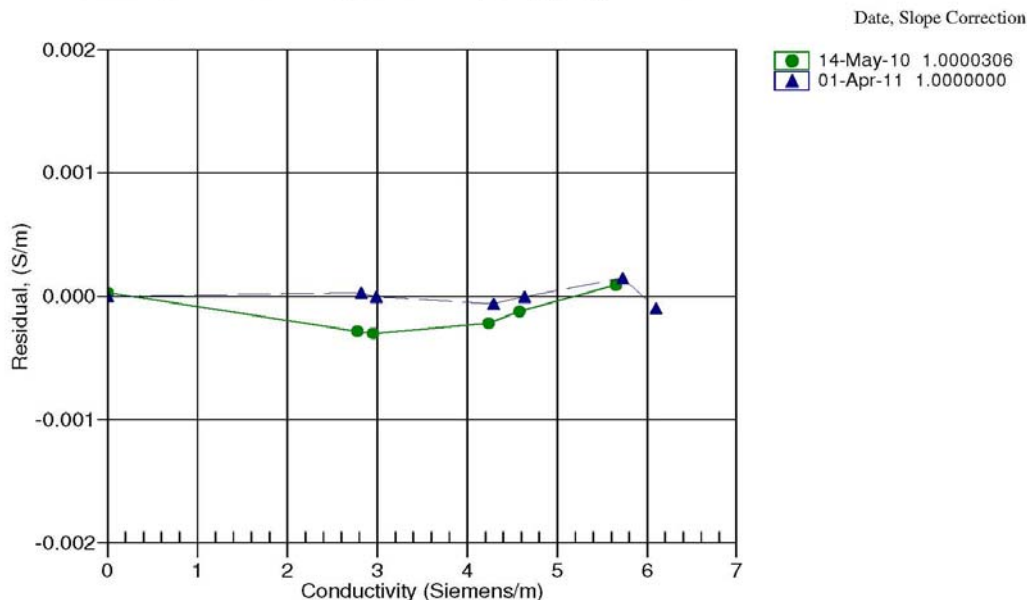
$$\text{Conductivity} = (af^m + bf^2 + c + dt) / [10(1 + \epsilon p)] \text{ Siemens/meter}$$
 $t = \text{temperature}[^{\circ}\text{C}]; p = \text{pressure}[\text{decibars}]; \delta = CT_{cor}; \epsilon = CP_{cor};$ 
 $\text{Residual} = (\text{instrument conductivity} - \text{bath conductivity}) \text{ using } g, h, i, j \text{ coefficients}$ 


**CTD Temperature (Primary)****SEA-BIRD ELECTRONICS, INC.**

13431 NE 20th Street, Bellevue, Washington, 98005-2010 USA

Phone: (425) 643 - 9866 Fax (425) 643 - 9954 Email: seabird@seabird.com

SENSOR SERIAL NUMBER: 1457  
CALIBRATION DATE: 20-Jul-11SBE3 TEMPERATURE CALIBRATION DATA  
ITS-90 TEMPERATURE SCALE

## ITS-90 COEFFICIENTS

$g = 4.82809751e-003$   
 $h = 6.70097854e-004$   
 $i = 2.50547874e-005$   
 $j = 1.95140884e-006$   
 $f_0 = 1000.0$

## IPTS-68 COEFFICIENTS


$a = 3.68121221e-003$   
 $b = 5.98505490e-004$   
 $c = 1.44412633e-005$   
 $d = 1.95278728e-006$   
 $f_0 = 6156.810$

BATH TEMP (ITS-90)	INSTRUMENT FREQ (Hz)	INST TEMP (ITS-90)	RESIDUAL (ITS-90)
-1.5000	6156.810	-1.5000	0.00001
1.0000	6512.586	1.0000	0.00002
4.5001	7035.211	4.5000	-0.00008
8.0000	7587.187	8.0000	0.00003
11.5001	8169.308	11.5001	0.00003
15.0000	8782.284	15.0001	0.00006
18.5001	9426.881	18.5000	-0.00007
22.0000	10103.800	22.0000	0.00001
25.5000	10813.716	25.5000	-0.00002
29.0000	11557.299	29.0000	0.00002
32.5001	12335.169	32.5001	-0.00000

$$\text{Temperature ITS-90} = 1/[g + h[\ln(f_0/f)] + i[\ln^2(f_0/f)] + j[\ln^3(f_0/f)]] - 273.15 \text{ (}^\circ\text{C)}$$

$$\text{Temperature IPTS-68} = 1/[a + b[\ln(f_0/f)] + c[\ln^2(f_0/f)] + d[\ln^3(f_0/f)]] - 273.15 \text{ (}^\circ\text{C)}$$
Following the recommendation of JPOTS:  $T_{68}$  is assumed to be  $1.00024 * T_{90}$  (-2 to 35  $^\circ\text{C}$ )

Residual = instrument temperature - bath temperature

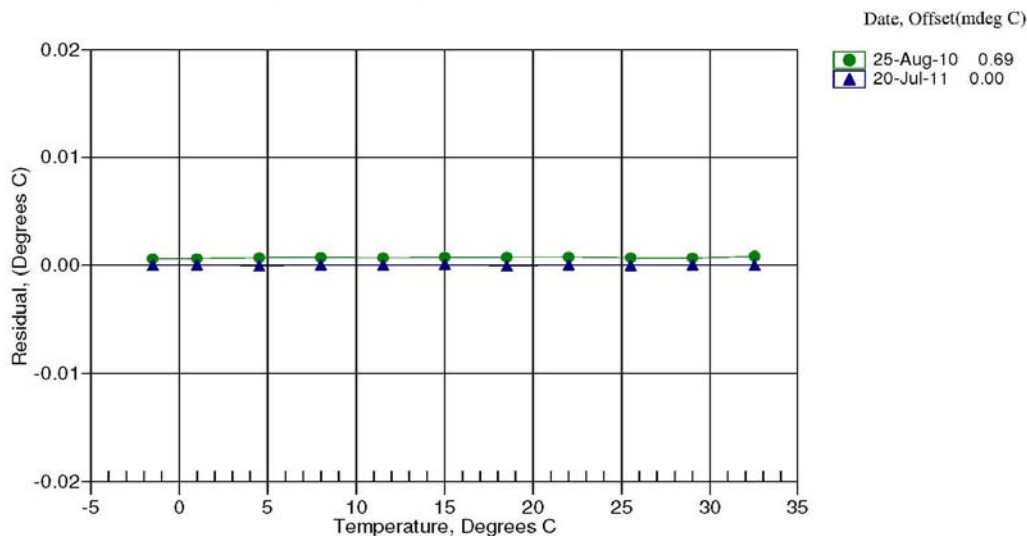

**CTD Temperature (Secondary)****Sea-Bird Electronics, Inc.**

13431 NE 20th Street, Bellevue, WA 98005-2010 USA

Phone: (+1) 425-643-9866 Fax (+1) 425-643-9954 Email: seabird@seabird.com

SENSOR SERIAL NUMBER: 2367  
CALIBRATION DATE: 25-Jul-12SBE3 TEMPERATURE CALIBRATION DATA  
ITS-90 TEMPERATURE SCALE

## ITS-90 COEFFICIENTS

$g = 4.37178289e-003$   
 $h = 6.45874796e-004$   
 $i = 2.34063776e-005$   
 $j = 2.18001461e-006$   
 $f_0 = 1000.0$

## IPTS-68 COEFFICIENTS


$a = 3.68121141e-003$   
 $b = 6.02142822e-004$   
 $c = 1.61797940e-005$   
 $d = 2.18156390e-006$   
 $f_0 = 3031.904$

BATH TEMP (ITS-90)	INSTRUMENT FREQ (Hz)	INST TEMP (ITS-90)	RESIDUAL (ITS-90)
-1.5000	3031.904	-1.4999	0.00007
1.0000	3206.034	1.0000	-0.00004
4.5000	3461.822	4.4999	-0.00011
8.0000	3731.979	8.0000	-0.00003
11.5000	4016.883	11.5001	0.00008
15.0000	4316.905	15.0002	0.00016
18.5000	4632.386	18.5000	-0.00001
22.0000	4963.705	21.9999	-0.00013
25.5000	5311.217	25.5000	-0.00004
29.0000	5675.225	29.0000	0.00002
32.5000	6056.039	32.5000	0.00003

$$\text{Temperature ITS-90} = 1/[g + h[\ln(f_0/f)] + i[\ln^2(f_0/f)] + j[\ln^3(f_0/f)]] - 273.15 \text{ (}^\circ\text{C)}$$

$$\text{Temperature IPTS-68} = 1/[a + b[\ln(f_0/f)] + c[\ln^2(f_0/f)] + d[\ln^3(f_0/f)]] - 273.15 \text{ (}^\circ\text{C)}$$
Following the recommendation of JPOTS:  $T_{68}$  is assumed to be  $1.00024 * T_{90}$  (-2 to 35  $^\circ\text{C}$ )

Residual = instrument temperature - bath temperature

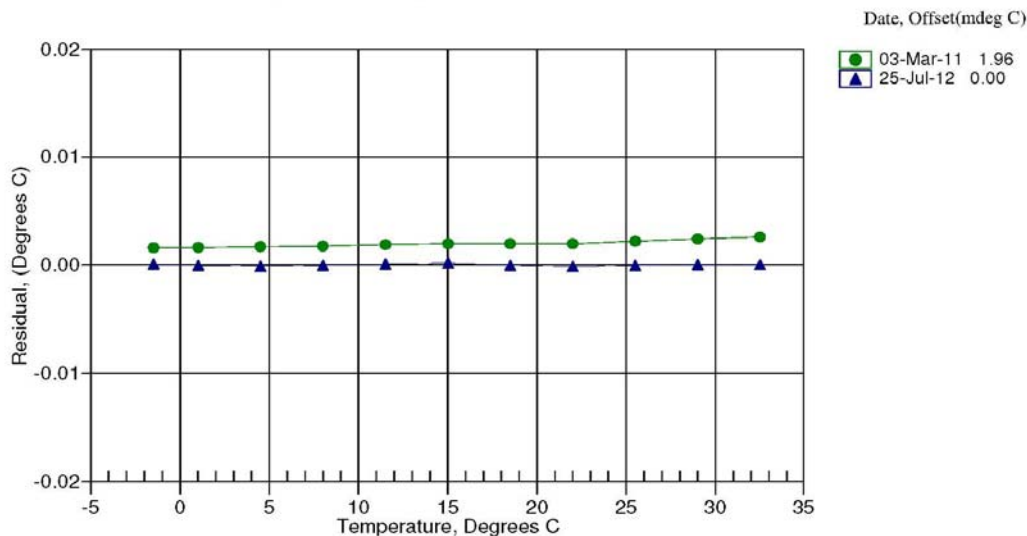

**Fluorometer**

PO Box 518  
620 Applegate St.  
Philomath, OR 97370



(541) 929-5650  
Fax (541) 929-5277  
[www.wetlabs.com](http://www.wetlabs.com)

**ECO Chlorophyll Fluorometer Characterization Sheet**

Date: 4/29/2011

S/N: FLRTD-855

Chlorophyll concentration expressed in µg/l can be derived using the equation:

$$\text{CHL } (\mu\text{g/l}) = \text{Scale Factor} * (\text{Output} - \text{Dark Counts})$$

	Analog Range 1	Analog Range 2	Analog Range 4 (default)	Digital
<b>Dark Counts</b>	0.114	0.071	0.049 V	71 counts
<b>Scale Factor (SF)</b>	6	13	25 µg/l/V	0.0077 µg/l/count
<b>Maximum Output</b>	4.93	4.93	4.93 V	16326 counts
<b>Resolution</b>	0.8	0.8	0.8 mV	1.0 counts

Ambient temperature during characterization

21.0 °C

**Analog Range:** 1 (most sensitive, 0–4,000 counts), 2 (midrange, 0–8,000 counts), 4 (entire range, 0–16,000 counts).

**Dark Counts:** Signal output of the meter in clean water with black tape over detector.

**SF:** Determined using the following equation:  $SF = x / (\text{output} - \text{dark counts})$ , where x is the concentration of the solution used during instrument characterization. SF is used to derive instrument output concentration from the raw signal output of the fluorometer.

**Maximum Output:** Maximum signal output the fluorometer is capable of.

**Resolution:** Standard deviation of 1 minute of collected data.

The relationship between fluorescence and chlorophyll-a concentrations *in-situ* is highly variable. The scale factor listed on this document was determined using a mono-culture of phytoplankton (*Thalassiosira weissflogii*). The population was assumed to be reasonably healthy and the concentration was determined by using the absorption method. To accurately determine chlorophyll concentration using a fluorometer, you must perform secondary measurements on the populations of interest. This is typically done using extraction-based measurement techniques on discrete samples. For additional information on determining chlorophyll concentration see "Standard Methods for the Examination of Water and Wastewater" part 10200 H, published jointly by the American Public Health Association, American Water Works Association, and the Water Environment Federation.

FLRTD-855.xls

Revision J

3/17/08

**Transmissometer**

PO Box 518  
620 Applegate St.  
Philomath, OR 97370



(541) 929-5650  
Fax (541) 929-5277  
[www.wetlabs.com](http://www.wetlabs.com)

**C-Star Calibration**

Date **November 2, 2011** S/N# **CST-891DR** Pathlength **25 CM**

**Analog output**

$V_d$  **0.059 V**  
 $V_{air}$  **4.779 V**  
 $V_{ref}$  **4.673 V**

Temperature of calibration water **20.0 °C**  
Ambient temperature during calibration **21.7 °C**

Relationship of transmittance ( $Tr$ ) to beam attenuation coefficient ( $c$ ), and pathlength ( $x$ , in meters):  **$Tr = e^{-cx}$**

To determine beam transmittance:  **$Tr = (V_{sig} - V_{dark}) / (V_{ref} - V_{dark})$**

To determine beam attenuation coefficient:  **$c = -1/x * \ln(Tr)$**

$V_d$  Meter output with the beam blocked. This is the offset.

$V_{air}$  Meter output in air with a clear beam path.

$V_{ref}$  Meter output with clean water in the path.

Temperature of calibration water: temperature of clean water used to obtain  $V_{ref}$ .

Ambient temperature: meter temperature in air during the calibration.

$V_{sig}$  Measured signal output of meter.

Revision L

6/9/09

**Disolved Oxygen Sensor****Sea-Bird Electronics, Inc.**

13431 NE 20th Street, Bellevue, WA 98005-2010 USA

Phone: (+1) 425-643-9866 Fax (+1) 425-643-9954 Email: seabird@seabird.com

SENSOR SERIAL NUMBER: 0150  
CALIBRATION DATE: 04-Aug-12

## SBE 43 OXYGEN CALIBRATION DATA

## COEFFICIENTS

Soc = 0.5201

Voffset = -0.4806

Tau20 = 1.03

A = -2.5246e-003

B = 6.5850e-005

C = -1.4865e-006

E nominal = 0.036

## NOMINAL DYNAMIC COEFFICIENTS

D1 = 1.92634e-4 H1 = -3.30000e-2

D2 = -4.64803e-2 H2 = 5.00000e+3


H3 = 1.45000e+3

BATH OX (ml/l)	BATH TEMP ITS-90	BATH SAL PSU	INSTRUMENT OUTPUT(VOLTS)	INSTRUMENT OXYGEN(ml/l)	RESIDUAL (ml/l)
1.23	2.00	0.04	0.725	1.23	-0.01
1.24	6.00	0.04	0.757	1.23	-0.00
1.25	12.00	0.04	0.806	1.24	-0.00
1.26	20.00	0.04	0.875	1.26	0.00
1.27	30.00	0.04	0.971	1.27	0.01
1.27	26.00	0.04	0.933	1.27	0.01
4.19	2.00	0.04	1.318	4.19	-0.00
4.20	12.00	0.04	1.578	4.20	0.00
4.21	6.00	0.04	1.422	4.21	-0.00
4.21	20.00	0.04	1.802	4.21	0.00
4.22	30.00	0.04	2.110	4.23	0.01
4.22	26.00	0.04	1.985	4.23	0.01
6.73	30.00	0.04	3.072	6.72	-0.01
6.75	26.00	0.04	2.880	6.75	-0.00
6.75	12.00	0.04	2.243	6.75	-0.00
6.77	20.00	0.04	2.602	6.76	-0.00
6.77	2.00	0.04	1.833	6.77	0.00
6.78	6.00	0.04	1.999	6.79	0.00

$$\text{Oxygen (ml/l)} = \text{Soc} * (V + \text{Voffset}) * (1.0 + A * T + B * T^2 + C * T^3) * \text{OxSol}(T, S) * \exp(E * P / K)$$

V = voltage output from SBE43, T = temperature [deg C], S = salinity [PSU], K = temperature [Kelvin]

OxSol(T,S) = oxygen saturation [ml/l], P = pressure [dbar], Residual = instrument oxygen - bath oxygen

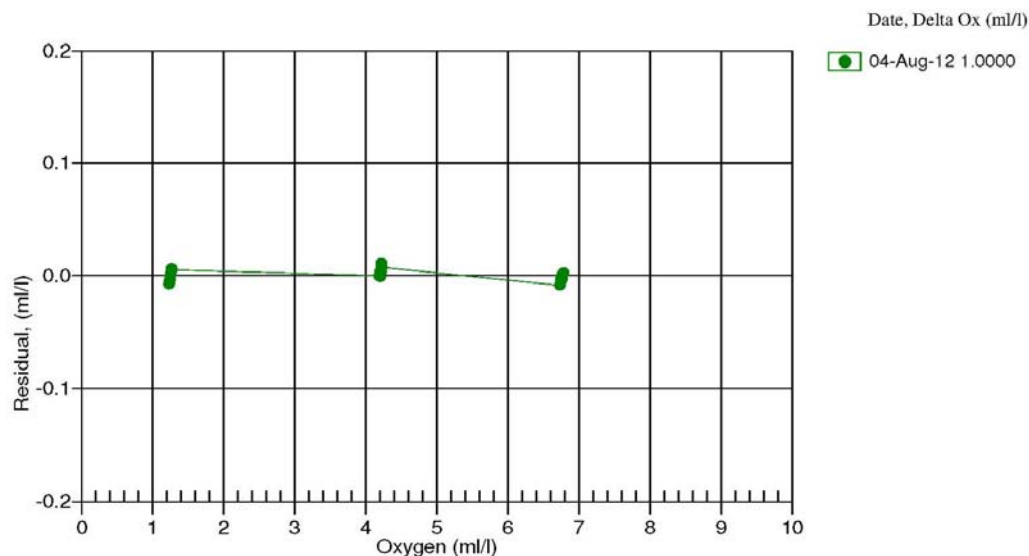



**Disolved Oxygen Sensor****Sea-Bird Electronics, Inc.**

13431 NE 20th Street, Bellevue, WA 98005-2010 USA

Phone: (+1) 425-643-9866 Fax (+1) 425-643-9954 Email: seabird@seabird.com

SENSOR SERIAL NUMBER: 0201  
CALIBRATION DATE: 27-Jan-12

## SBE 43 OXYGEN CALIBRATION DATA

## COEFFICIENTS

Soc = 0.5626

Voffset = -0.4959

Tau20 = 1.28

A = -2.9971e-003

B = 1.1966e-004

C = -2.1453e-006

E nominal = 0.036

## NOMINAL DYNAMIC COEFFICIENTS

D1 = 1.92634e-4 H1 = -3.30000e-2

D2 = -4.64803e-2 H2 = 5.00000e+3

H3 = 1.45000e+3


BATH OX (ml/l)	BATH TEMP ITS-90	BATH SAL PSU	INSTRUMENT OUTPUT(VOLTS)	INSTRUMENT OXYGEN(ml/l)	RESIDUAL (ml/l)
1.25	2.00	0.04	0.727	1.25	-0.00
1.25	6.00	0.04	0.756	1.26	0.00
1.26	12.00	0.04	0.800	1.26	0.01
1.27	20.00	0.04	0.864	1.28	0.01
1.27	26.00	0.04	0.912	1.28	0.01
1.28	30.00	0.04	0.947	1.29	0.01
4.15	6.00	0.04	1.352	4.14	-0.01
4.16	12.00	0.04	1.497	4.15	-0.01
4.16	20.00	0.04	1.692	4.15	-0.01
4.16	2.00	0.04	1.261	4.14	-0.02
4.17	30.00	0.04	1.956	4.17	0.00
4.18	26.00	0.04	1.853	4.18	-0.00
6.65	30.00	0.04	2.823	6.64	-0.00
6.68	26.00	0.04	2.664	6.68	0.00
6.69	20.00	0.04	2.420	6.69	-0.00
6.71	12.00	0.04	2.114	6.71	0.00
6.78	6.00	0.04	1.901	6.78	0.01
6.84	2.00	0.04	1.762	6.85	0.01

$$\text{Oxygen (ml/l)} = \text{Soc} * (V + \text{Voffset}) * (1.0 + A * T + B * T^2 + C * T^3) * \text{OxSol}(T, S) * \exp(E * P / K)$$

V = voltage output from SBE43, T = temperature [deg C], S = salinity [PSU] K = temperature [deg K]

OxSol(T,S) = oxygen saturation [ml/l], P = pressure [dbar], Residual = instrument oxygen - bath oxygen

Date, Delta Ox (ml/l)

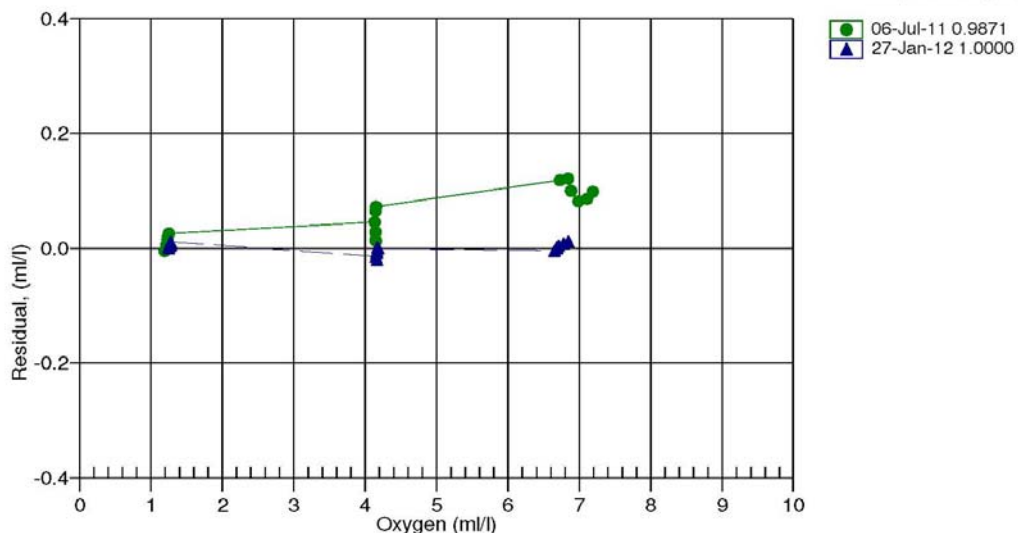

**Underwater PAR****Biospherical Instruments Inc**

## CALIBRATION CERTIFICATE

## UNDERWATER PAR SENSOR WITH LOG AMPLIFIER

Calibration Date: 08/04/11				Job No.: R11037					
Model Number: QSP200L									
Serial Number: 7154									
Operator: TPC									
Standard Lamp: GS1024(7/22/11)									
Operating Voltage Range: 6 to 15 VDC (+)									
Note: The QSP-200 uses a log amplifier to measure the detector signal current with $V = \log I \text{ (Amps)} / I_{\text{Ref}}$ To calculate irradiance, use this formula:									
$\text{Irradiance} = \text{Calibration factor} * (10^{\text{Light Signal Voltage}} - 10^{\text{Dark Voltage}})$									
With the appropriate (solar corrected) Irradiance Calibration Factor:									
Dry Calibration Factor: 4.40E+13 quanta/cm <sup>2</sup> -sec/"amps"				7.31E-05 $\mu$ Einsteins/cm <sup>2</sup> -sec/"amps"					
Wet Calibration Factor: 7.42E+13 quanta/cm <sup>2</sup> -sec/"amps"				1.23E-04 $\mu$ Einsteins/cm <sup>2</sup> -sec/"amps"					
<b>Sensor Test Data and Results<sup>4)</sup></b>									
Sensor Supply Current (Dark):		53.7	mA						
Supply Voltage:		6	Volts						
Lamp Integrated PAR Irradiance:		9.30E+15	quanta/cm <sup>2</sup> -sec	0.01544	$\mu$ Einsteins/cm <sup>2</sup> sec				
SC3 Immersion Coefficient:		0.594	Scalar Correction:	1	PAR Solar Correction: 1.0000				
Nominal Filter OD	Calibrated Trans.	Sensor Voltage	Measured Trans.	Measured Signal (Amps)	Estimated Signal (Amps)	Calc. Output (Volts)	Error (Volts)	Error (%)	Test Irrad. (quanta/cm <sup>2</sup> -sec)
No Filter	100.00%	2.327	100.00%	2.12E-08	2.12E-08	2.330	0.003	0.0	9.30E+15
0.3	36.10%	1.898	36.85%	7.82E-09	7.66E-09	1.891	-0.006	-2.0	3.43E+15
0.5	27.60%	1.791	28.69%	6.09E-09	5.86E-09	1.777	-0.014	-3.8	2.67E+15
1	9.27%	1.366	10.41%	2.21E-09	1.97E-09	1.320	-0.045	-10.9	9.68E+14
2	1.11%	0.625	1.41%	3.00E-10	2.36E-10	0.555	-0.070	-21.5	1.31E+14
3	0.05%	0.164	0.11%	2.27E-11	1.13E-11	0.129	-0.035	-50.1	9.94E+12
Dark Before: 0.091 Volts				$I_{\text{Ref}} = 1.00\text{E-}10$ Amps					
Light - No Filter Hldr.: 2.327 Volts				$I_{\text{Dark}} = 1.23\text{E-}10$ Amps		RG780		0.135	
Dark After - NFH: 0.091 Volts				$10^{V_{\text{Dark}}} = 1.233105$ Amps					
Average Dark: 0.091 Volts									
Notes: 1. Annual calibration is recommended. 2. There is increasing error associated with readings below zero. 3. The collector should be cleaned frequently with alcohol. 4) This section is for internal use and for more advanced analysis.									

QSP-200L, QSP2300(2006- )



**Oxygen Sensor**

AANDERAA DATA INSTRUMENTS

**CALIBRATION CERTIFICATE**Form No. 622, Dec 2005  
Page 1 of 2Sensing Foil Batch No: 5009  
Certificate No:Product: Oxygen Optode 3835  
Serial No: 1424  
Calibration Date: 21 October 2010

This is to certify that this product has been calibrated using the following instruments:

Calibration Bath model FNT  
ASL Digital Thermometer model F250321-1-40  
Serial: 6792/06**Parameter: Internal Temperature:****Calibration points and readings:**

Temperature (°C)	1.17	12.12	24.11	36.08
Reading (mV)	730.09	383.95	-11.29	-379.10

**Giving these coefficients**

Index	0	1	2	3
TempCoef	2.37613E01	-3.08128E-02	2.84735E-06	-4.15311E-09

**Parameter: Oxygen:**

	O2 Concentration	Air Saturation
Range:	0-500 µM <sup>1)</sup>	0 - 120%
Accuracy <sup>1)</sup> :	< ±8µM or ±5% (whichever is greater)	±5%
Resolution:	< 1 µM	< 0.4%
Settling Time (63%):	< 25 seconds	

**Calibration points and readings<sup>2)</sup>:**

	Air Saturated Water	Zero Solution (Na <sub>2</sub> SO <sub>3</sub> )
Phase reading (°)	3.27669E+01	6.65595E+01
Temperature reading (°C)	9.90918E+00	2.04774E+01
Air Pressure (hPa)	9.76884E+02	

**Giving these coefficients**

Index	0	1	2	3
PhaseCoef	-4.44928E00	1.17131E00	0.00000E00	0.00000E00

<sup>1)</sup> Valid for 0 to 2000m (6562ft) depth, salinity 33 - 37ppt<sup>2)</sup> The calibration is performed in fresh water and the salinity setting is set to: 0

AANDERAA DATA INSTRUMENTS AS

5851 BERGEN, NORWAY

Tel. +47 55 60 48 00

Fax. +47 55 60 48 01

E-mail: info@aadi.no

Web: http://www.aadi.no



AANDERAA DATA INSTRUMENTS

# CALIBRATION CERTIFICATE

Form No. 622, Dec 2005  
Page 2 of 2Sensing Foil Batch No: 5009  
Certificate No:Product: Oxygen Optode 3835  
Serial No: 1424  
Calibration Date: 21 October 2010

## SR10 Scaling Coefficients:

At the SR10 output the Oxygen Optode 3830 can give either absolute oxygen concentration in  $\mu\text{M}$  or air saturation in %. The setting of the internal property "Output" <sup>3)</sup>, controls the selection of the unit. The coefficients for converting SR10 raw data to engineering units are fixed.

Output = -1	Output = -2
A = 0	A = 0
B = 4.883E-01	B = 1.465E-01
C = 0	C = 0
D = 0	D = 0
Oxygen ( $\mu\text{M}$ ) = A + BN + CN2 + DN3	Oxygen (%) = A + BN + CN2 + DN3

<sup>3)</sup> The default output setting is set to -1

Date: 22 October 2010

Sign:

Tor-Ove Kvalvaag, Calibration Engineer

AANDERAA DATA INSTRUMENTS AS

5851 BERGEN, NORWAY

Tel. +47 55 60 48 00

Fax. +47 55 60 48 01

E-mail: [info@aadi.no](mailto:info@aadi.no)Web: <http://www.aadi.no>



AANDERAA DATA INSTRUMENTS

# CALIBRATION CERTIFICATE

Form No. 621, Dec 2005

Certificate No: 3853\_5009\_40331  
Batch No: 5009

Product: O2 Sensing Foil PSt3 3853  
Calibration Date: 2 June 2010

## Calibration points and phase readings (degrees)

Temperature (°C)		3.97	10.93	20.15	29.32	38.39
Pressure (hPa)		977.00	977.00	977.00	977.00	977.00
O2 in % of O2+N2	0.00	73.18	72.63	71.62	70.72	69.77
	1.00	68.01	67.02	65.42	63.92	62.31
	2.00	64.39	63.16	61.20	59.44	57.57
	5.00	55.80	54.16	51.76	49.56	47.45
	10.00	46.27	44.47	41.97	39.75	37.69
	20.90	35.09	33.38	31.14	29.24	27.56
	30.00	29.85	28.30	26.31	24.64	23.19

Giving these coefficients <sup>1)</sup>

Index	0	1	2	3
C0 Coefficient	4.53793E+03	-1.62595E+02	3.29574E+00	-2.79285E-02
C1 Coefficient	-2.50953E+02	8.02322E+00	-1.58398E-01	1.31141E-03
C2 Coefficient	5.66417E+00	-1.59647E-01	3.07910E-03	-2.46265E-05
C3 Coefficient	-5.99449E-02	1.48326E-03	-2.82110E-05	2.15156E-07
C4 Coefficient	2.43614E-04	-5.26759E-06	1.00064E-07	-7.14320E-10

<sup>1)</sup> Ask for Form No 621S when this O2 Sensing Foil is used in Oxygen Sensor 3830 with Serial Numbers lower than 184.

Date: 11/4/2010

Sign:

Tor-Ove Kvalvaag, Calibration Engineer

AANDERAA DATA INSTRUMENTS AS

5851 BERGEN, NORWAY

Tel. +47 55 60 48 00

Fax. +47 55 60 48 01

E-mail: [info@aadi.no](mailto:info@aadi.no)Web: <http://www.aadi.no>