
LMG 1211

Eugene Domack

Palmer Station Opening, Part II

Cruise Data Report

By Mike Coons and Sheldon Blackman



10 Oct, 2012 – 30 Oct, 2012

Table of Contents

INTRODUCTION.....	1
ARCHIVE DATA EXTRACTION.....	2
CD DIRECTORY STRUCTURE.....	3
DISTRIBUTION CONTENTS.....	4
ADCP	4
CALIBRATION.....	4
IMAGERY	4
LOGSHEETS.....	4
MAPS	4
OCEAN (CTD, XBT AND XCTD).....	4
/Ocean/CTD.....	4
/Ocean/XBT	5
/Ocean/XCTD	5
DATA AND SCIENCE REPORT	6
SALTS	6
SCIENCE	6
WAYPOINTS	6
QC PLOTS.....	6
JGOFS DATA SET.....	7
RVDAS	8
<i>Meteorological and Light Data</i>	8
<i>Navigational Data</i>	8
<i>Geophysical Data</i>	8
<i>Oceanographic Data</i>	8
DATA FILE NAMES AND STRUCTURES.....	9
LKNU – KNUDSEN SONAR	9
LNDS – NET DEPTH SENSOR	10
LWN1 - WINCHES	10
LMWX – CAMPBELL METEOROLOGICAL DAS	10
LSEA – WET WALL FLOWS, TRANSMISSOMETER	11
UTSG – MICROUTSG, THERMOSALINOGRAPH	12
LRTM – DIGITAL REMOTE TEMPERATURE	12
LDFL – FLUOROMETER, WETLAB ECO	12
LG02 – OXYGEN SYSTEM.....	12
LOXY – OXYGEN (PART OF PCO ₂ SYSTEM, SEPARATE FROM OXYGEN SYSTEM)	14
LPCO – PCO ₂ SYSTEM.....	14
LGUV – BIOSPHERICAL GUV	15

Lsvp - Sound Velocity Probe in ADCP Transducer Well	16
Ladc – ADCP Speed Log	16
Lgyr - Gyro	16
Lsep – Seapath 330 GPS	17
Lgar - Garmin GPS	18
Tgps – Trimble Centurion GPS	19
LMG Sensors.....	21
Shipboard Sensors.....	21
CTD Sensors.....	21
Underway Calibration Sheets.....	22
Thermosalinograph (Temp) – Primary	22
Thermosalinograph (Conductivity) - Primary	23
Thermosalinograph (Temp) – Secondary.....	24
Thermosalinograph (Conductivity) – Secondary	25
Transmissometer	26
Fluorometer	27
Temperature/Relative Humidity.....	28
Barometer	29
PIR	30
PSP	31
Digital Remote Temperature	32
CTD Calibration Sheets.....	33
CTD Fish.....	33
Primary Temperature	34
Secondary Temperature	35
Primary Conductivity	36
Secondary Conductivity	37
Primary Dissolved Oxygen	38
Secondary Dissolved Oxygen	39
PAR Sensor	40
Fluorometer	41
Transmissometer	42
Acquisition and Processing Information	43
Processing Specifics	43
Significant Notes.....	43
Errors and Events	43

Introduction

The LMG data acquisition systems continuously log data from a suite of instrumentation throughout the cruise. This document describes the format of that data and its location on the distribution CDs. It also contains important information that may affect how this data is processed such as instrument failures or other known problems with acquisition.

The data collected during this cruise is distributed on a CD-ROM written in ISO9660 level-1 format. This data format has very strict requirements on filenames and organization. However, it is readable by virtually every computing platform.

All of the data has been archived with the Unix “tar” command and/or compressed using Unix “gzip” compression. Tar files have a “.tar” extension and Gzipped files have a “.gz” extension. Tools are available on all platforms for uncompressing and de-archiving these formats. On Macintosh, Stuffit Expander with DropStuff will open a tar archive and uncompress gzipped and Unix compressed files. For Windows, WinZip, a shareware utility included on this CD (remember, it is shareware) will open these files.

In some cases to adhere to the ISO9660 format the .tar extension was removed. When we tarred the files then gzip the tar archive the name of the file became *File.tgz*. This name does not follow the 8.3 naming convention of the ISO9660 format. On Windows and Mac Platforms Winzip and Stuffit Expander handles this just fine. When they expand the *File.gz* the expanded file becomes *File.tar*, which both software packages can handle. On Unix platforms gunzip expands *File.tgz* but it does not append the .tar extension. So you may not recognize the file as a tar archive, but OS does recognize it as a tar archive. If you use the file command it will return saying it is a tar file. The below tar command will un-archive the file just fine.

IMPORTANT: Read the last section in this document, Acquisition Problems and Events, for important information that may affect the processing of this data.

Archive Data Extraction

It is often useful to know exactly how an archive was produced when expanding its contents. Tar files were created using the following commands:

```
tar cvf archive-file files-to-be-archived
```

To create a list of the files in the archive:

```
tar tvf archive-file > contents.list
```

To extract the files from the archive:

```
tar xvf archive-file file(s)-to-extract
```

G-zipped files will have a “.gz” extension on the filename. These files can be decompressed after de-archiving, using:

```
gunzip filename.gz
```

CD Directory Structure

Disc 1	Disc 2	
<p>ADCP: ADCP.tar</p> <p>Cal: InstCoef.txt UW\ CTD\ Imagery: Imag.tar</p> <p>Logs: Air_log.pdf Drifter.pdf</p> <p>Maps: LMG1211.jpg</p> <p>Ocean: Ctd.tar Xbt.tar</p> <p>Process: JGOF.tar PCO2.tar PROC.tar QC.tar</p> <p>Report: Report.doc Report.pdf</p> <p>RVDAS: nav/ uw/</p> <p>Science: Contents of Science Drive</p> <p>Utility: Acrobat Winzip</p> <p>Waypoint: Waypoint.txt</p>	<p>Knudsen Data LMG1211: Knudsen track line files</p>	

Distribution Contents

ADCP

/Adcp/

This directory contains a tar file of gentoo's proc directory, which contains a database of the averaged ping data, Matlab m-files used in processing the data, and daily graphs of the currents. For more information contact Teri Chereskin at tchereskin@ucsd.edu.

Calibration

/Cal/

Refer to the InstCoef.txt file along with the specific instrument calibration sheets, both located in this directory, for information on how the RVDAS data was collected and processed.

Imagery

/Imagery/

This directory contains things such as ice imagery, isobar charts, sat imagery, wave and wind images, and weather reports.

Logsheets

/logsheet/

This directory contains logsheets for XBT, XCTD, salts, air samples and TCO2 data. For further information on this data (TCO2), contact Tim Newberger at tnewberg@ldeo.columbia.edu.

Maps

/Maps/

This directory maps and mapping data generated by the ship's MCIS and automated scripts, usually in JPEG or PostScript format, plus any maps provided for this purpose by the on-board science party.

Ocean (CTD, XBT and XCTD)

/Ocean/CTD

The ctd data was collected and processed on a computer running Windows XP, using Seasave Win32 – Version 7.20 and SBE Data Processing – Version 7.21

For more information and software visit the web site at www.seabird.com.

/Ocean/CTD/Configs/

This directory contains the Seabird .xmlcon config file. This file contains information of which sensors where used and what freq or volt the where connected to.

/Ocean/CTD/Scripts/

This directory contains the batch file and psa files that we used for post processing the data. The data was processed with the standard seabird processing method. This is just a preliminary processing which

was done to verify that the sensors were functioning properly during the cruise. The raw data should be re-processed using the pre and post cruise sensor calibrations.

/Ocean/CTD/Raw

This directory contains the raw file collected at each CTD cast, which is represented by a set of four files containing a bottle-firing file (.bl), a configuration file (.xmlcon), a data file (.hex) and a header file (.hdr). Casts are named with the following g501CCC.ext, where g is for the LMG, 501 is the cruise 05-01, CCC is the cast number. For example; the raw files associated with the Cast 1 are: g501001.bl, g501001.con, g501001.dat, g501001.hdr. The raw data files(*.hex) are binary files.

/Ocean/CTD/Graphs

This directory contains graphical plots of each CTD cast.

/Ocean/CTD/Process

This directory contains the processed data files for each CTD cast, the processing method used is briefly described in the above section *CTD/Scripts/*. Also see the above section *CTD/Data/raw* for a description of the file naming convention used. Each processed cast is represented here by a set of ten files:

GXXXCCC.xmlcon	A copy of the configuration file for the cast.
GXXXCCC.cnv	The converted file for the whole cast.
GXXXCCC.ros	The rosette file that contains the scan lines for each bottle trip.
GXXXCCC.btl	The bottle file that contains the avg, standard deviation, min, and max for a select set of variables for each bottle fired during the upcast.
dGXXXCCC.cnv	The converted file for the down cast.
dGXXXCCC.asc	An ASCII formatted file for the down cast without a header.
dGXXXCCC.hdr	The header for the down cast.
uGXXXCCC.cnv	The converted file for the up cast.
uGXXXCCC.asc	An ASCII formatted file for the up cast without a header.
uGXXXCCC.hdr	The header for the up cast.

/Ocean/XBT

Contains a zip archive of XBT data generated for the Drake Transect by NOAA standard “AMVERSEAS” software. Non-Drake transect data may also be included, which will a combination of binary and ascii files generated by standard Sippican MK-21 software. The dataset includes the following files:

dat.zip	The probe drop schedule and other configuration files.
efiles.zip	The edited data files.
log.zip	The log files for drop and GPS positioning.
nav.zip	The navigation files.
sfiles.zip	The raw data files.
*.pdf	Scanned images of the paper log sheets.

/Ocean/XCTD

Expendable Conductivity, Temperature, and Depth (XCTD) digital probes were used to obtain water column temperature and Salinity profiles. The two files were created for each drop .RDF files contain the raw data, and the .EDF contain the exported ascii data.

Data and Science Report

/Report/

Copies of this report in MS Word, HTML, and text formats.

Salts

/Salinity/

This directory contains the log sheet for the Salt sample take during the Drake Transect Sampling, also a spreadsheet containing the Salt sample and TSG comparison. These samples were analyzed with the onboard AutoSal by the MST.

Science

/Science/

This directory, if populated, contains data specified by the on-board science party.

WAYPOINTS

/WAYPTS/

Contains the waypoint file used for the cruise; this is read by the DAS system and the selected waypoint is displayed on the CCTV system.

QC Plots

/Process/QC_PLOTS/

Postscript files of data stored each day on RVDAS for quality control analysis during the cruise. There are 3 types of files, named metXXX.ps, navXXX.ps, and oceanXXX.ps, where XXX is represents the Julian day. Met files are a summary of the data from the meteorological instruments, Nav files are a summary of navigational data, and Ocean files are a summary of the underway seawater and bathymetry data.

JGOFS Data Set

/Process/JGOF/

The JGOFS data set consists of a single file produced each day named jg<julian_day>.dat.gz where <julian_day> is the day the data was acquired. The “.gz” extension indicates that the individual files are compressed before archiving. The daily file consists of 22 separate columnar fields in text format, which are described below. The JGOFS data set is obtained primarily by applying calibrations to raw data and decimating to whole minute intervals. However, several fields are derived measurements from more than a single raw input. *Note: Null, unused, or unknown fields are filled with 9's in the JGOFS data.*

Additionally, 3 separate QC plots are generated daily by the ET using the JGOFS data set. These plots include TSG and Bathymetry data, meteorological data, and navigation data. The files are called ocean<julian_day>.ps, met<julian_day>.ps, and nav<julian_day>.ps respectively.

Field	Data	Units
01	GMT date	dd/mm/yy
02	GMT time	hh:mm:ss
03	PCOD latitude (negative is South)	Ddd.dddd
04	PCOD longitude (negative is West)	Ddd.dddd
05	Ships speed	Knots
06	GPS HDOP	-
07	Gyro Heading	Degrees (azimuth)
08	Course over ground	Degrees (azimuth)
09	Mast PAR	μ Einstens/meters ² sec
10	Sea surface temperature	°C
11	Not used	-
12	Sea surface salinity	PSU
13	Sea depth (uncorrected, calc. sw sound vel. 1500 m/s)	meters
14	True wind speed (port windbird)	meters/sec
15	True wind direction (port windbird)	degrees (azimuth)
16	Ambient air temperature	°C
17	Relative humidity	%
18	Barometric pressure	mBars
19	Sea surface fluorometry	μ g/l
20	Transmissometer	Volts (0-5)
21	PSP	W/m ²
22	PIR	W/m ²

RVDAS

/RVDAS/

RVDAS (Research Vessel Data Acquisition System) was developed at Lamont-Doherty Earth Observatory of Columbia University and has been used on the R/V Maurice Ewing for several years. It was adapted for use on the Nathaniel B. Palmer and her sister ship, the R/V Laurence M. Gould.

Below you will find detailed information on the data included. Be sure to read the "Significant Acquisition Events" section below for important information about data acquisition during this cruise.

Meteorological and Light Data

Measurement	File ID	Collect. Status	Rate	Instrument
Air Temperature	lmwx	continuous	1 sec	R. M. young 41372VC
Relative Humidity	lmwx	continuous	1 sec	R. M. young 41372VC
Wind Speed/Direction	lmwx	continuous	1 sec	Gill Ultrasonic
PAR, (Photosynthetically-Available Radiation)	lmwx	continuous	1 sec	BSI QSR-240
Barometer	lmwx	continuous	1 sec	R. M. young 61201
GUV	lguv	continuous	1 sec	GUV2511
Port Ultrasonic Wind Speed/Direction	lmwx	continuous	1 sec	Gill Wind Observer II
PIR (LW radiation)	lmwx	continuous	1 sec	Eppley PIR
PSP (SW radiation)	lmwx	continuous	1 sec	Eppley PSP
Oxygen	lgo2	continuous	1 min	UCAR Oxygen system

Navigational Data

Measurement	File ID	Collect. Status	Rate	Instrument
Trimble GPS	tgps	civilian mode	1 sec	Trimble 20636-00SM
Gyro	lgyr	continuous	0.2 sec	Anschutz Gyro
Garmin GPS	lgar	continuous	1 sec	Garmin 17
Seapath GPS	lsept	Continuous	1 sec	Seapath 330

Geophysical Data

Measurement	File ID	Collect. Status	Rate	Instrument
Bathymetry	lknu	variable	Varies	Knudsen 320B/R
Net Depth Sensor	lnds	variable	~1/3 sec	Omega PX-605
DUSH 11 Winch	lwn1	variable	varies	Markey DUSH 11
DUSH 5 Winch	lwn1	variable	varies	Markey DUSH 5
DUSH 4 Winch	lwn1	variable	varies	Markey DUSH 4

Oceanographic Data

Measurement	File ID	Collect. Status	Rate	Instrument
Salinity	utsg	continuous	1 sec	SeaBird 45
Sea Surface Temperature	Lrtm	continuous	1 sec	SeaBird 38
Fluorometry (digital)	lfir	continuous	1 sec	Turner 10-AU-005
Fluorometry (digital)	ldflr	continuous	1 sec	Wetlab ECO
ADCP, Speed Log	ladc	continuous	1 sec	RD Instruments
Oxygen	loxy	continuous	1 sec	
PCO2	lpco2	continuous	2.5 min	

Data File Names and Structures

RVDAS data is divided into two broad categories, ***Underway*** and ***Navigation***. The groups are abbreviated “uw” and “nav”. Thus, these two tar files, lmguw.tar and lmgnav.tar exist under the top-level rvdas directory. The instruments are broken down as shown. Each data file is g-zipped to save space on the distribution. Not all data types are collected everyday or on every cruise.

RVDAS data files are named following the convention: LMG[FileID].dDDD.

- The FileID is a 4-character code representing the system being logged, for example: lmet (for meteorology)
- DDD is the Julian day of the data collection

Underway Data	File ID	Navigation Data	File ID
Meteorological - Cambell	lmwx	Gyro Compass	lgyr
Knudsen	lknu	P-CODE GPS	tgps
microTSG	utsg	Garmin 17 GPS	lgar
Digital Remote Temperature	lrmr	Seapath 330 GPS	lsept
Fluorometer – Wetlab ECO	ldfl		
ADCP	ladc		
Sound Velocity Probe	lsvp		
GUV & PUV	lguv		
PCO2 System	lpco		
Oxygen	loxy		
Wet Wall Flows	lsea		
Winches: Dush4,5,&11	lwn1		
Net Depth Sensor	lnds		

Data is received by the RVDAS system via RS-232 serial connections. The data files that comprise the rvdas data set are described below. A time tag is added to each line of data received and the data is written to disk.

YY+DDD:HH:MM:SS.SSS [data stream from instrument]

Where, YY: two-digit year, DDD: Julian Day, HH: 2 digit hours, MM: 2 digit minutes SS.SSS: seconds. All times are UTC.

The delimiters used to separate fields in the raw data files are usually spaces and commas, but other delimiters are used (::, =, @) and occasionally there is no delimiter. Care should be taken when reprocessing the data that the fields separations are clearly understood. An example data

Iknu – Knudsen Sonar

08+024:07:36:36.245 HF,00.00, 000,0,LF,448.9,-026,1

Field	Data	Units
1	RVDAS Time Tag	
2	HF – high frequency header (12 kHz)	
3	HF - depth to surface	meters
4	HF - Echo Strength	
5	HF – Depth Valid Flag	
6	LF – low frequency header (3.5 kHz)	
7	LF - depth to surface	meters
8	LF - Echo Strength	
9	LF – Depth Valid Flag	

Inds – Net Depth Sensor

99+099:00:18:19.775 V01 00199.8

Field	Data	Units
1	RVDAS Time Tag	
2	V01 – Sensor 1	label
3	Depth	meters

Iwn1 - Winches

08+033:11:27:50.673 RD,DUSH-5,00111.63,00000000,-0000012,1938

Field	Data	Units
1	RVDAS Time Tag	
2	Record Identifier, RD=Remote Data	
3	Winch Identifier, DUSH-X where X is 4, 5, or 11	
4	Tension	lbs
5	Speed	Meters/minute
6	Payout	meters
7	Checksum	

Imwx - Campbell Meteorological DAS

08+034:13:52:14.216 PUS,A,356,002.15,M,+332.28,+000.97,60,08

Field	Data	Units
1	RVDAS Time Tag	
2	PUS tag – Port UltraSonic Anemometer	
3	Unit Identification, A-Z	
4	Port Wind Direction, degrees relative to Bow	deg
5	Port Wind Speed	m/s
6	Units, M=meters per second	
7	Sound Speed	m/s
8	Sonic Temperature	°C
9	Status, 0=ok, 60=Heating Enabled & ok, Other value mean a fault	
10	Check Sum	

08+034:13:52:14.216 SUS,A,356,002.15,M,+332.28,+000.97,60,08

Field	Data	Units
1	RVDAS Time Tag	
2	SUS tag – Starboard UltraSonic Anemometer	
3	Unit Identification, A-Z	
4	Port Wind Direction, degrees relative to Bow	deg
5	Port Wind Speed	m/s
6	Units, M=meters per second	
7	Sound Speed	m/s
8	Sonic Temperature	°C
9	Status, 0=ok, 60=Heating Enabled & ok, Other value mean a fault	
10	Check Sum	

08+034:13:52:14.454 MET,12.22322,44.25706,-75,-25,-363.6365,2.332982,-0.08215196,278.6845,
279.2192,854.6198

Field	Data	Units
1	RVDAS Time Tag	
2	MET tag	
3	Power Supply Voltage	Volts
4	Enclosure Relative Humidity	%
5	Air Temp	°C
6	Air Relative Humidity	%
7	PAR	mVolts
8	PSP Thermopile	mVolts
9	PIR Thermopile	mVolts
10	PIR Case Temperature	°K
11	PIR Dome Temperature	°K
12	Barometer	mBars

Lsea – wet wall flows, transmissometer

12+004:12:01:04.438 WetLab_1,14.1,XMISS,3.098,V,0.000,0.000,0.000,-928.535,-
220.566,0.000,0.000,T,NAN,NAN,NAN,P,0,0,F,47.91811,0,6.815308,0,0,0,0,I,1,1,1,1

Field	Data	Units
01	RVDAS Time Tag	
02	WetLab_1	Text
03	Internal Temperature	°C
04	XMISS	Text
05	Transmissometer	V
06	V	Text
07	Double Ended Voltage 1	V
08	Double Ended Voltage 2	V
09	Double Ended Voltage 3	V
10	Voltage 1	V
11	Voltage 2	V
12	Voltage 3	V
13	Voltage 4	V
14	T	Text
15	Temperature 1	°C
16	Temperature 2	°C
17	Temperature 3	°C
18	Temperature 4	°C
19	P	Text
20	Pulse Counter 1	Number
21	Pulse Counter 2	Number
22	F	Text
23	Flow Counter 1	Number
24	Flow Counter 2	Number
25	Flow Counter 3	Number
26	Flow Counter 4	Number
27	Flow Counter 5	Number
28	Flow Counter 6	Number
29	Flow Counter 7	Number
30	Flow Counter 8	Number
31	I	Text
32	Digital Input 1	Number

Field	Data	Units
33	Digital Input 2	Number
34	Digital Input 3	Number
35	Digital Input 4	Number

utsg – microTSG, ThermosalinographFor further information on this data, check www.seabird.com for SBE 45 MicroTSG Thermosalinograph

08+037:13:45:57.596 2.6470, 3.03853, 33.8129, 1459.351

Field	Data	Units
1	RVDAS Time Tag	
2	Internal water temperature	°C
3	Conductivity	S/m
4	Salinity	psu
5	Sound Velocity	m/s

Irtm – digital Remote TemperatureFor further information on this data, check on www.seabird.com on SBE38 Digital Thermometer

08+037:13:47:17.841 2.2527

Field	Data	Units
1	RVDAS Time Tag	
2	External water temperature	°C

Idfl – Fluorometer, Wetlab ECO

08+037:13:55:08.434 99/99/99 99:99:99 0.00 2585 73 543

Field	Data	Units
1	RVDAS Time Tag	
2	Fluorometer Date	mm/dd/yy
3	Fluorometer Time	hh:mm:ss
4	Chlorophyll Signal	µg/l
5	Reference	λq
6	Counts – Chlorophyll Signal	Count
7	Thermistor	

Igo2 – Oxygen SystemFor further information on this data, please contact Britt Stephens at stephens@ucar.edu

```
12+301:22:35:30.558 81300.8 16.0 32.0 000.0 005.0 1.2589631 1.2379622 744.549 111.853 131.642 -2.089 -2.448 723.594 002.50 086.43 099.74 002.77 000.97 050.65 0.000 001.19 065.59 039.48 1966.097 01.345 37.0171 37.8433 000.0 000.0 20.66 20.41 -92.0 28.66 37.44 42.33 37.80 47.95 0.0 01.88 0.0001711 0.0001712 0.0000747 0.0000725 02.657 02.678 -1 0.0000895 -043.94
```

Field	Data	Units
1	RVDAS Time Tag	
2	jsecoday - Seconds since midnight	
3	jselflag - 8 bit decimal value indicated selected gases	
4	jprgflag - 8 bit decimal value indicated purged gases	
5	jmfclflag - 8 bit decimal value indicated mass-flow controller states	

6	jgenflag - 8 bit decimal value indicated other parameters	
7	jfcv1 - voltage on Fuel Cell #1	
8	jfcv2 - voltage on Fuel Cell #2	
9	jpfcell - pressure in torr at fuel cells	
10	jlco2a - CO2 in ppm in Li7000 Cell A	
11	jlco2b - CO2 in ppm in Li7000 Cell B [CO2 MEASUREMENT]	
12	jlih2oa - H2O in ppt in Li7000 Cell A	
13	jlih2ob - H2O in ppt in Li7000 Cell B	
14	jlipb - pressure in torr at Li7000 Cell B	
15	flmfcset - mass-flow controller set voltage	
16	jfl1 - flow in sccm on Inlet Line #1	
17	jfl2 - flow in sccm on Inlet Line #2	
18	jflt - flow in sccm on Long-Term reference cylinder	
19	jflcal - flow in sccm on selected Calibration cylinder	
20	jflwta - flow in sccm on selected Working Tank Cylinder	
21	jvsoset - purge line voltage-sensitive orifice set voltage	
22	jflpurge - flow in sccm on purge line	
23	jflwtb - flow in sccm on Working Tank line through sensors	
24	jflsp - flow in sccm on Span line through sensors	
25	jpfridge - pressure in torr inside fridge trap	
26	jtfridge - temperature in C inside fridge trap	
27	jtmpt - fuel-cell control temperature (thermistor) in C for MPT10000	
28	jtfcell - fuel-cell thermistor temperature in C	
29	jtach1 - rmp of fan inside Line #1 Inlet	
30	jtach2 - rmp of fan inside Line #2 Inlet	
31	jtcyl1 - temperature in C from cylinder box RTD #1	
32	jtcyl2 - temperature in C from cylinder box RTD #2	
33	jtchill - temperature in C from chiller RTD	
34	jtamb - temperature in C RTD near Analyzer Box electronics	
35	jtomega - Analyzer Box control temperature (RTD) for Omega CNi2332	
36	jtu4ch - temperature in C inside USB4CH 24-bit A/D box	
37	jtfcrtd - fuel-cell RTD temperature in C	
38	jfirga - temperature in C inside Li7000	
39	jliflags - Li7000 status flag	
40	jlirhsr - Li7000 source/detector relative humidity	
41	jsdfcv1 - standard deviation of 1-Hz Fuel Cell #1 voltage	
42	jsdfcv2 - standard deviation of 1-Hz Fuel Cell #2 voltage	
43	jslfcv1 - slope of 1-Hz Fuel Cell #1 voltage	
44	jslfcv2 - slope of 1-Hz Fuel Cell #2 voltage	
45	jsdco2a - standard deviation of 1-Hz Li7000 Cell A CO2 in ppm	
46	jsdco2b - standard deviation of 1-Hz Li7000 Cell B CO2 in ppm	
47	posneg - flag indicating position of fuel-cell changeover valve	
48	jogdeltadiff - amplitude of 3-jog O2 difference-signal [O2 MEASUREMENT]	

Ioxy – Oxygen (Part of PCO2 system, separate from Oxygen System)

For further information on this data, contact Tim Newberger at tnewberg@ldeo.columbia.edu

04+117:23:57:23.504	MEASUREMENT	3830	380	Oxygen:	309.95	Saturation:
83.48	Temperature:	-1.35	DPhase:	33.41	BPhase:	32.22
	RPhase:	0.00	BAmp:	262.09	BPot:	163.00
0.00	RawTem..:	694.92				RAmp:

Field	Data	Units
1	RVDAS Time Tag	
2-4	Measurement ID, Model Number, Serial Number	alphanumeric
5	Oxygen heading	text
6	Oxygen Reading	Raw numeric
7	Saturation heading	text
8	Saturation Reading	Raw numeric
9	Temperature heading	text
10	Water Temperature	°C
11	Dphase heading	text
12	Dphase	Raw numeric
13	Bphase heading	text
14	BPhase	Raw numeric
15	Rphase heading	text
16	Rphase	Raw numeric
17	Bamp heading	text
18	Bamp	Raw numeric
19	Bpot heading	text
20	Bpot	Raw numeric
21	Ramp heading	text
22	Ramp	Raw numeric
23	RawTem heading	text
24	RawTemp	Raw numeric

Ipc0 – PCO2 system

For further information on this data, contact Tim Newberger at tnewberg@ldeo.columbia.edu

02+319:23:59:13.748	2002319.99851	7154.27	26.49	1033.6	325.79	6.74	329.3
53.76	0	Equil					

Field	Data	Units
1	RVDAS Time Tag	
2	Julian date file string	Julian
3	IR voltage reading	mV
4	Cell temperature	°C
5	Barometer	millibars
6	Gas flow	mL/min
7	VCO2 dry value	PPM
8	PCO2 wet/Delta value	PPM
9	Equilibrator Temperature from RTD	°C
10	Equilibrator Temperature from SBE-38	°C
11	Solenoid position ID	number
12	Measured gas	name

Lguv – Biospherical GUV

08+037:14:17:59.211 020608 141758 -.000099 1.307E0 7.24E0 1.316E1 2.609E1 3.285E1 3.505E1 8.075E-2 38.993 17.985

GUV only

Field	Data	Units
1	RVDAS Time Tag	
2	GUV Computer Date	mmddyy
3	GUV Computer Time	hhmmss
4	Ed0Gnd - GUV	Volts
5	Ed0305 - GUV	µW/cm ² nm
6	Ed0313 - GUV	µW/cm ² nm
7	Ed0320 - GUV	µW/cm ² nm
8	Ed0340 - GUV	µW/cm ² nm
9	Ed0380 - GUV	µW/cm ² nm
10	Ed0395 - GUV	µW/cm ² nm
11	Ed0PAR - GUV	µE/cm ² sec
12	Ed0Temp - GUV	°C
13	Ed0VIn	Volts

GUV and PUV

Field	Data	Units
1	RVDAS Time Tag	
2	GUV Computer Date	mmddyy
3	GUV Computer Time	hhmmss
4	EdZGnd -PUV	Volts
5	EdZ305 -PUV	µW/cm ² nm
6	EdZ313 -PUV	µW/cm ² nm
7	EdZ320 -PUV	µW/cm ² nm
8	EdZ395 -PUV	µW/cm ² nm
9	EdZ340 -PUV	µW/cm ² nm
10	EdZPAR -PUV	µE/cm ² sec
11	LuZChl -PUV	µE/srm ² sec
12	EdZ380 -PUV	µW/cm ² nm
13	WTemp -PUV	°C
14	Depth -PUV	m
15	EdZTemp -PUV	°C
16	LuZTemp -PUV	°C
17	Tilt -PUV	Degrees
18	Roll -PUV	Degrees
19	Ed0Gnd - GUV	Volts
20	Ed0305 - GUV	µW/cm ² nm
21	Ed0313 - GUV	µW/cm ² nm
22	Ed0320 - GUV	µW/cm ² nm
23	Ed0340 - GUV	µW/cm ² nm
24	Ed0380 - GUV	µW/cm ² nm
25	Ed0395 - GUV	µW/cm ² nm
26	Ed0PAR - GUV	µE/cm ² sec
27	Ed0Temp - GUV	°C
28	Ed0VIn	Volts

lsvp - Sound Velocity Probe in ADCP Transducer Well

00+348:01:59:52.128 1539.40

Field	Data	Units
1	RVDAS Time Tag	
2	Sound velocity	m/s

ladc – ADCP Speed Log

00+019:23:59:59.099 \$PUHAW,UVH,-1.48,-0.51,250.6

Field	Data	Units
1	RVDAS Time Tag	
2	\$PUHAW	
3	UVH (E-W, N-S, Heading)	
4	Ship Speed relative to reference layer ¹ velocity ² , East vector	nautical miles per hour
5	Ship Speed relative to reference layer ¹ velocity ² , North vector	nautical miles per hour
6	Ship heading	degrees

¹The reference layer is an average velocity measured in a number of depth “bins”. On the LMG, the bins are eight meters deep and bins 3-10 define the reference layer. Hence, the reference layer is the water column from 16-80 meters beneath the ship.

²The speed output is water velocity relative to the ship’s hull and is therefore opposite of the actual movement of the ship. For example, if the ship’s heading is due north, the North/South reference layer velocity is likely to be negative (southerly).

Igyr - Gyro

02+315:23:59:58.194 \$PASVW,00.1,A*1D
 02+315:23:59:58.414 \$IIVHW,287.7,T,,M,,N,,K*71
 02+315:23:59:58.616 \$HEHDT,287.7,T*25
 02+315:23:59:58.821 \$HEROT,001.6,A*2C
 02+315:23:59:58.984 \$HCHDT,,T*07

HDT: True Heading

01+083:00:00:02.893 \$HEHDT,246.3,T*2C

Field	Data	Units
1	RVDAS Time Tag \$HEHDT	
2	Heading XXXXX = ddd.d	degrees
3	T flag for true heading, checksum	

ROT: Rate of Turn

01+083:00:00:03.093 \$HEROT,-006.3,A*03

Field	Data	Units
1	RVDAS Time Tag \$HEROT	
2	Rate of turn	degrees/min
3	Status: A = data valid, checksum	

Isep – Seapath 330 GPS**INZDA: Time and Date Data**

10+351:23:59:58.142 \$INZDA,235958.08,17,12,2010,,*78

Field	Data	Units
1	RVDAS Time Tag	
2	\$INZDA Tag	
3	time	hhmmss.ss
3	day	dd
4	month	mm
5	year	yyyy
6	(blank)	
7	Check sum	hexadecimal

INGGA: Global Positioning Fix Data

10+351:23:59:58.142 \$INGGA,235958.07,6118.168460,S,06008.089527,W,1,12,0.7,22.57,M,17.79,M,,*46

Field	Data	Units
1	RVDAS Time Tag	
2	\$INGGA Tag	
3	Time (UTC)	hhmmss.ss
3	Latitude in degrees with decimal minutes	ddmm.mmm
4	{N S} (latitude is north or south)	
5	Longitude in degrees with decimal minutes	ddmm.mmm
6	{E W} (longitude is east or west)	
7	GPS quality indicator: 0 = invalid position, 1 = GPS SPS used, 2 = DGPS used, 3 = GPS PPS used, 4 = GPS RTK used, 5 = GPS float RTK used, 6 = dead reckoning	
8	Number of Satellites in use (00-99)	
9	HDOP	
10	Height above ellipsoid in meters	m.mm
11	M	
12	Age of DGPS corrections in seconds	ss.ss
13	M	
14	(blank)	
15	*Check sum	hexadecimal

INRMC: Recommended Minimum Specific GNSS Data

10+351:23:59:58.200 \$INRMC,235958.07,A,6118.168460,S,06008.089527,W,12.8,331.22,171210,11.3,E,A*1C

Field	Data	Units
1	RVDAS Time Tag	
2	\$INRMC Tag	
3	UTC of position	hhmmss.ss
4	Status A = Data Valid, V = Navigation Receiver Warning	
5	Latitude in degrees with decimal minutes	ddmm.mmm
6	North (N) or South (S)	
7	Longitude in degrees with decimal minutes	ddmm.mmm
8	East (E) or West (W)	
9	Speed Over Ground, knots	knots
10	Course Over Ground, degrees True	degrees
11	Date	ddmmyy
12	Magnetic Variation, degrees E/W	degrees
13	Mode Indicator E= Estimated Mode	
14	*Check sum	

PSXN,20: Data Quality

10+351:23:59:58.200 \$PSXN,20,1,2,0,0*38

Field	Data	Units
1	RVDAS Time Tag	
2	\$PSXN Tag	
3	20 (PSXN identifier)	
3	Horizontal position and velocity quality: 0 = normal, 1 = reduced performance, 2 = invalid data	
4	Height and vertical velocity quality: 0 = normal, 1 = reduced performance, 2 = invalid data	
5	Heading quality: 0 = normal, 1 = reduced performance, 2 = invalid data	
6	Roll and pitch quality: 0 = normal, 1 = reduced performance, 2 = invalid data	
7	*Check sum	hexadecimal

PSXN,23: Roll, Pitch, Heading and Heave

10+351:23:59:58.213 \$PSXN,23,0.02,-0.76,330.56,*0B

Field	Data	Units
1	RVDAS Time Tag	
2	\$PSXN Tag	
3	23 (PSXN identifier)	
3	Roll in degrees. Positive with port side up.	d.dd
4	Pitch in degrees. Positive with bow up.	d.dd
5	Heading in degrees true	d.dd
6	Heave in meters. Positive is down	m.mm
7	*Check sum	hexadecimal

Igar - Garmin GPS

GGA: Global Positioning Fix Data

08+034:12:26:06.131 \$GPGGA,122607,6446.4733,S,06403.4455,W,1,11,0.9,-193.4,M,9.7,M,,*5A

Field	Data	Units
1	RVDAS Time Tag	
2	\$GPGGA Tag	
3	UTC of position	hhmmss.ss
4	Latitude in degrees with decimal minutes	ddmm.mmm
5	North (N) or South (S)	
6	Longitude in degrees with decimal minutes	ddmm.mmm
7	East (E) or West (W)	
8	GPS quality (1=GPS 2=DGPS)	
9	Number of GPS satellites used	
10	Horizontal dilution of precision (HDOP)	
11	Antenna height above/below mean-sea-level (geoid)	meters
12	Units for antenna height (M = Meters)	
13	Geoidal Separation ¹	
14	Units for Geoidal Separation (M = Meters)	meters
15	Age of differential GPS data, number of seconds since last SC104 Type 1 or 9	
16	Differential reference station ID	

¹Geoidal Separation: the difference between the WGS-84 earth ellipsoid and mean-sea-level (geoid). A negative value represents mean-sea-level below ellipsoid.

GLL: Geographic Position – Latitude/Longitude

08+034:12:26:06.211 \$GPGLL,6446.4733,S,06403.4455,W,122607,A

Field	Data	Units
1	RVDAS Time Tag	
2	\$GPGLL Tag	
3	Latitude	ddmm.mmm
4	North (N) or South (S)	
5	Longitude	ddmm.mmm
6	East (E) or West (W)	
7	UTC of position	hhmmss.ss
8	Status: A = Data Valid, V =Data Not Valid	

VTG: Track Made Good and Speed over Ground

08+034:12:26:06.211 \$GPVTG,167,T,151,M,000.0,N,0000.0,K

Field	Data	Units
1	RVDAS Time Tag	
2	\$GPVTG Tag	
3	Track, degrees true	degrees
3	T flag for True	
4	Track, degrees magnetic	degrees
5	M flag for Magnetic	
6	Speed over Ground	knots
7	N flag for Knots	
8	Speed over Ground	kmhr
9	K flag for km/hr	

tgps – Trimble Centurion GPS**GGA: Global Positioning Fix Data**

08+034:12:26:06.131 \$GPGGA,122607,6446.4733,S,06403.4455,W,1,11,0.9,-193.4,M,9.7,M,,*5A

Field	Data	Units
1	RVDAS Time Tag	
2	\$GPGGA Tag	
3	UTC of position	hhmmss.ss
4	Latitude in degrees with decimal minutes	ddmm.mmm
5	North (N) or South (S)	
6	Longitude in degrees with decimal minutes	ddmm.mmm
7	East (E) or West (W)	
8	GPS quality (1=GPS 2=DGPS)	
9	Number of GPS satellites used	
10	Horizontal dilution of precision (HDOP)	
11	Antenna height above/below mean-sea-level (geoid)	meters
12	Units for antenna height (M = Meters)	
13	Geoidal Separation ¹	
14	Units for Geoidal Separation (M = Meters)	meters
15	Age of differential GPS data, number of seconds since last SC104 Type 1 or 9	
16	Differential reference station ID	

¹Geoidal Separation: the difference between the WGS-84 earth ellipsoid and mean-sea-level (geoid). A negative value represents mean-sea-level below ellipsoid.

GLL: Geographic Position – Latitude/Longitude

08+034:12:26:06.211 \$GPGLL,6446.4733,S,06403.4455,W,122607,A

Field	Data	Units
1	RVDAS Time Tag	
2	\$GPGLL Tag	
3	Latitude	ddmm.mmm
4	North (N) or South (S)	
5	Longitude	ddmm.mmm
6	East (E) or West (W)	
7	UTC of position	hhmmss.ss
8	Status: A = Data Valid, V =Data Not Valid	

VTG: Track Made Good and Speed over Ground

08+034:12:26:06.211 \$GPVTG,167,T,151,M,000.0,N,0000.0,K

Field	Data	Units
1	RVDAS Time Tag	
2	\$GPVTG Tag	
3	Track, degrees true	degrees
3	T flag for True	
4	Track, degrees magnetic	degrees
5	M flag for Magnetic	
6	Speed over Ground	knots
7	N flag for Knots	
8	Speed over Ground	kmhr
9	K flag for km/hr	

RMC: Recommended Minimum Specific GNSS Data

08+034:13:17:26.627 \$GPRMC,131726.605,A,6446.4820,S,06403.3075,W,000.0,094.4,030208,16.3,E

Field	Data	Units
1	RVDAS Time Tag	
2	\$GPRMC Tag	
3	UTC of position	hhmmss.ss
4	Status A = Data Valid, V = Navigation Receiver Warning	
5	Latitude in degrees with decimal minutes	ddmm.mmm
6	North (N) or South (S)	
7	Longitude in degrees with decimal minutes	ddmm.mmm
8	East (E) or West (W)	
9	Speed Over Ground, knots	knots
10	Course Over Ground, degrees True	degrees
11	Date	ddmmyy
12	Magnetic Variation, degrees E/W	degrees
13	Mode Indicator E= Estimated Mode	

LMG Sensors

Shipboard Sensors

Sensor	Description	Serial #	Cal. Date	Status
Port Anemometer	Gill Ultrasonic Wind Observer II	840019	N/A	Collected
Starboard Anemometer	Gill Ultrasonic Wind Observer II	71738	N/A	Collected
Barometer	R.M. Young 61201	BP01150	03-Jun-2011	Collected
Humidity/Wet Temp	RM Young 41372LC	6719	26-Aug-2011	Collected
PAR for Mast	N/A	N/A	N/A	N/A
PIR	Eppley PIR	32031F3	16-Jul-2012	Collected
PSP	Eppley PSP	31701F3	13-Jul-2012	Collected
GUV (Mast)	N/A	N/A	N/A	N/A
Transmissometer	WET Labs C-Star 25 cm deep	CST-830DR	04-Nov-2011	Collected
MicroTSG (Primary)	Sea-Bird 45	390	20-Oct-2011	Collected
MicroTSG (Secondary)	Sea-Bird 45	227	21-Jun-2011	Collected
Digital Remote Temp	Sea-Bird 38	389	09-Sep-2010	Collected
Fluorometer	WET Labs ECO-FL	FLRTD-398	07-Sep-11	Collected

CTD Sensors

Sensor	Description	Serial #	Cal. Date	Status
CTD Fish	Seabird SBE9Plus	328		Collected
Primary Temperature	Seabird SBE3	2444		Collected
Secondary Temperature	Seabird SBE3	4573		Collected
Primary Conductivity	Seabird SBE4	1223		Collected
Secondary Conductivity	Seabird SBE4	3534		N/A
Primary Dissolved Oxygen	Seabird SBE43	150		Collected
Secondary Dissolved Oxygen	Seabird SBE43	201		Collected
Fluorometer	Wet Labs ECO	FLRTD-399		N/A
PAR	Biosph. Inst. QSP-2300	4714		Collected
Transmissometer	Wet Labs C-Star	CST-406DR		Collected

Underway Calibration Sheets

Note: Embedded pdf files can be opened with a right-click, Acrobat Document Object, Open

Thermosalinograph (temp) – Primary

7

Sea-Bird Electronics, Inc.

13431 NE 20th Street, Bellevue, WA 98005-2010 USA

Phone: (+1) 425 643-9866 Fax: (+1) 425-643-9954 Email: seabird@seabird.com

SENSOR SERIAL NUMBER: 1P90
CALIBRATION DATE: 20-Oct-11

SRB45 TEMPERATURE CALIBRATION DATA
ITS-90 TEMPERATURE SCALE

ITS-90 COEFFICIENTS

$$a_0 = 3.117633e-006$$

$$a_1 = 2.937730e-004$$

$$a_2 = -3.78738e-006$$


$$a_3 = 1.712400e-007$$

BATH TEMP (ITS-90)	INSTRUMENT OUTPUT	INST TEMP (ITS-90)	RESIDUAL (ITS-90)
1.0000	682265.1	1.0000	0.0000
4.0000	563237.6	4.5000	-0.5000
14.0000	358376.5	14.5000	0.5000
18.0000	303307.3	18.5000	0.5000
21.0000	247011.0	21.5000	-0.5000
23.0000	203687.8	23.0001	0.0001
32.0000	174100.9	32.5000	-0.5000

$$\text{Temperature ITS-90} = (1/a_0 + a_1/b_0(n)) - a_2/b_1(n) - a_3/b_2(n) + 273.15 \text{ (}^{\circ}\text{C)}$$

Residual = instrument temperature - bath temperature

Date: Delta T (mdeg C)

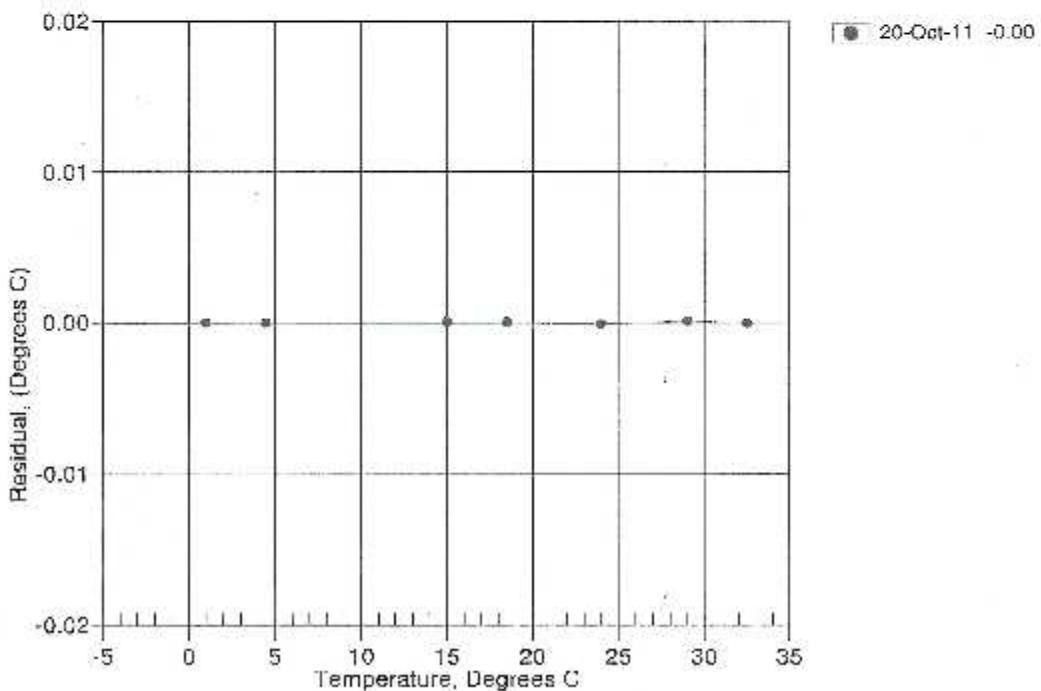

Thermosalinograph (conductivity) - Primary

8

Sea-Bird Electronics, Inc.

13431 NE 20th Street, Bellevue, WA 98005-2010 USA

Phone: (+1) 425-643-9863 Fax: (+1) 425-643-9954 Email: seabird@seabird.com

SENSOR SERIAL NUMBER: 0300
 CALIBRATION DATE: 20-Oct-11

SBE 45 CONDUCTIVITY CALIBRATION DATA
 PSS 1978: C(35,0) = 4.2914 Siemens/meter

COEFFICIENTS:

$a = -9.852903e-001$
 $b = 1.477444e-001$
 $c = -9.091034e-004$
 $d = 5.277075e-003$

$C_0000 = 9.5700e-006$
 $C_0001 = 3.2e00e-007$
 $W_0000 = 2.5724e-007$

BATH TEMP (°F/°C)	BATH SAL (PSU)	BATH COND (Siemens/m)	INST FREQ (Hz)	INST COND (Siemens/m)	RESIDUAL (Siemens/m)
25.0000	0.0000	0.00000	2510.61	0.00000	0.00000
26.0000	34.7520	2.90456	5239.98	2.98407	0.00001
27.0000	34.5205	2.29183	5428.78	3.23187	-0.10001
28.0000	34.6664	4.27700	6329.77	4.27700	0.00000
29.0000	34.6467	4.62136	6223.63	4.62136	0.00000
30.0000	34.6354	5.18115	6525.11	5.18115	0.00000
31.0000	34.8277	5.70337	6710.23	5.70337	0.00000
32.0000	34.8211	5.07873	6879.83	5.07873	0.00000


$$T = \text{INST FREQ} \times \sin(1.0 + W_0000 \times Q / 1000.0)$$

$$\text{Conductivity} = (q + \alpha t^2 - \beta t^3 + \gamma t^4) / (1 + \delta t + \epsilon p) \text{ Siemens/meter}$$

t = temperature[°C]; p = pressure[decibars]; α = CTerm; β = CPterm;

Residual = instrument conductivity - bath conductivity

Date: Slope Correction:

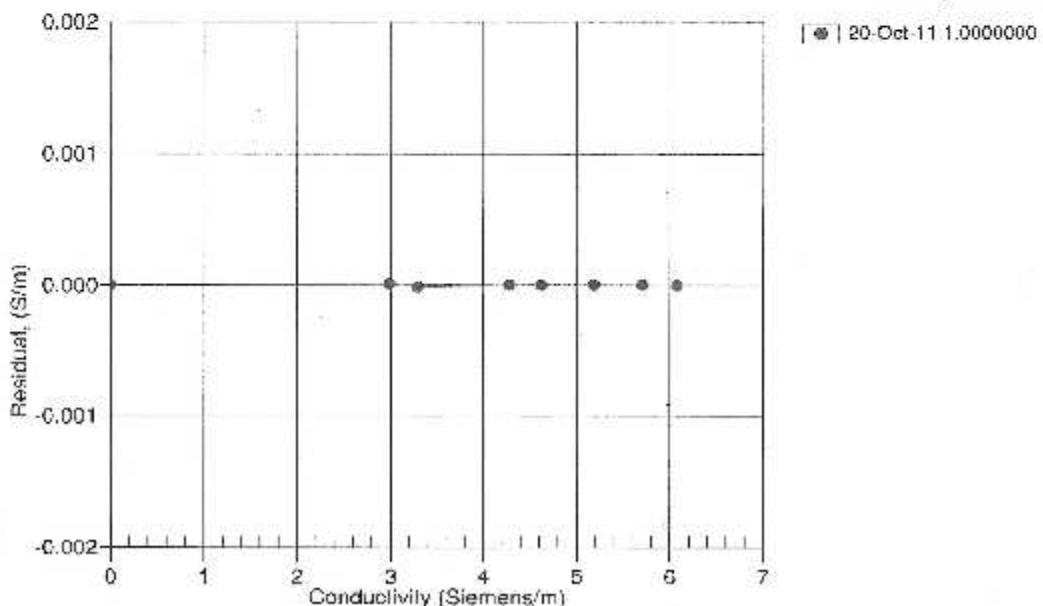

Thermosalinograph (Temp) – Secondary

SEA-BIRD ELECTRONICS, INC.
13431 NE 20th Street, Bellevue, Washington, 98005-2010 USA
 Phone: (425) 643 - 9866 Fax (425) 643 - 9954 Email: seabird@seabird.com

SENSOR SERIAL NUMBER: 0227
 CALIBRATION DATE: 21-Jun-11

SBE45 TEMPERATURE CALIBRATION DATA
 ITS-90 TEMPERATURE SCALE

ITS-90 COEFFICIENTS

a0 = 4.383631e-005
 a1 = 7.885211e-004
 a2 = 1.946313e-005
 a3 = 1.411804e-007


BATH TEMP (ITS-90)	INSTRUMENT OUTPUT	INST TEMP (ITS-90)	RESIDUAL (ITS-90)
1.0000	004575.1	1.0000	0.0000
4.0000	568013.3	4.0000	0.0000
15.0000	361626.2	15.0000	-0.0000
18.5000	313024.1	18.5001	0.0001
21.0000	250909.5	21.0000	-0.0002
29.0000	105570.3	29.0001	0.0001
32.4000	780840.3	32.4000	-0.0001

$$\text{Temperature ITS-90} = 1/(a0 + a1[\ln(t)] + a2[\ln^2(t)]) + a3[\ln^3(t)] - 273.15 \text{ (C)}$$

Residual = instrument temperature - bath temperature

Data, Delta T (indeg C)

● 13-Jan-11 -1.16
 ▲ 21-Jun-11 -0.00

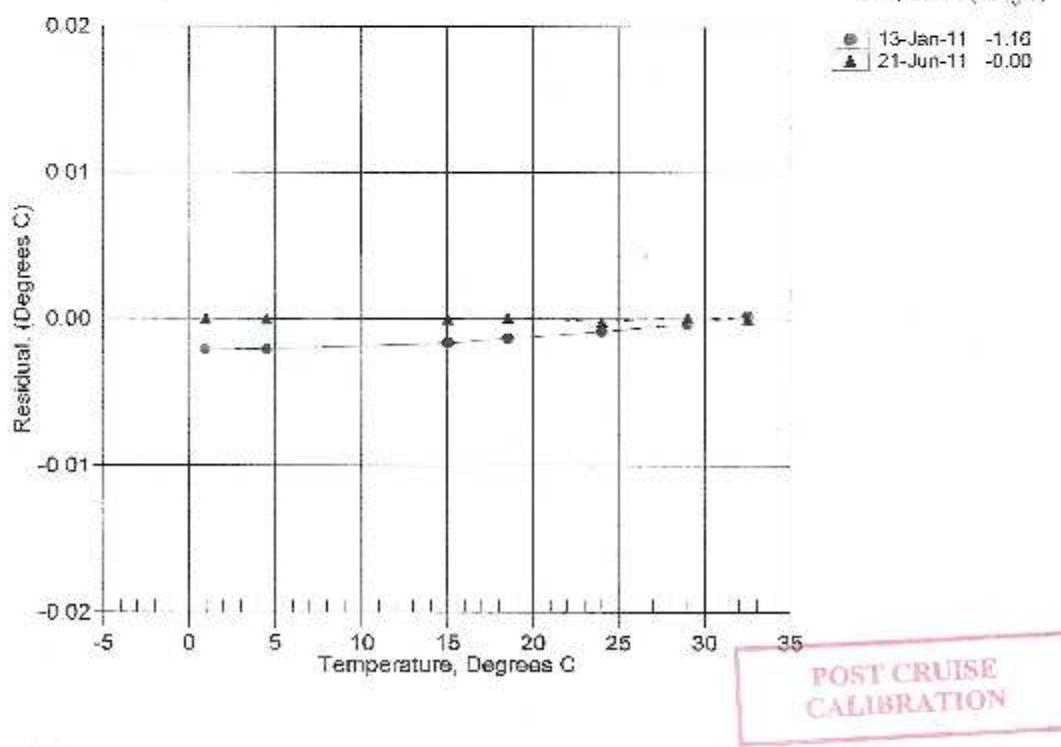

Thermosalinograph (Conductivity) – Secondary**SEA-BIRD ELECTRONICS, INC.**

13431 NE 20th Street, Bellevue, Washington, 98005-2010 USA

Phone: (425) 643 - 9666 Fax (425) 643 - 9954 Email: seabird@seabird.com

SENSOR SERIAL NUMBER: 0327
CALIBRATION DATE: 21-Jun-11SBE 45 CONDUCTIVITY CALIBRATION DATA
PNS 1978, C(35, 5,0) = 4.2914 Siemens/meter

COEFFICIENTS:

 $g = 1.018848e+000$
 $h = 1.478402e-001$
 $i = -4.340031e-004$
 $j = 6.126753e-006$
 $CPcor = -9.5700e-008$
 $CTcor = 3.2500e-006$
 $WBOTC = 1.0472e-006$

BATH TEMP (ITS-90)	BATH SAL (PSU)	BATH COND (Siemens/m)	INST FREQ (Hz)	INST COND (Siemens/m)	RESIDUAL (Siemens/m)
22.0000	0.0000	0.00000	3546.31	0.00000	0.00000
23.0000	34.9658	2.98753	5018.30	1.98753	0.00001
24.0000	34.9455	3.29671	5238.29	3.29572	0.00001
25.0000	34.9035	4.38096	6803.26	4.28097	0.00002
26.5000	34.8017	4.62729	5588.89	4.62750	0.00001
28.0000	34.0700	5.18703	6376.06	5.18700	0.00003
29.0000	31.8717	5.71037	6534.19	5.71037	0.00000
32.5000	54.8648	6.68349	6711.84	6.68350	0.00001


$$\delta = \text{INST FREQ} * \sqrt{1.0 + \text{WBOTC} * j} / 1000.0$$

$$\text{Conductivity} = (g + i\tau^2 + j\tau^4 - j\delta^4) / (\tau + 5i - e^2) \text{ Siemens/meter}$$

 $\tau = \text{temperature}[^{\circ}\text{C}]$; $\rho = \text{pressure}[\text{decibars}]$; $\delta = \text{CTcor}$; $e = \text{CPcor}$;

Residual = instrument conductivity - bath conductivity

Date, Slope Correction

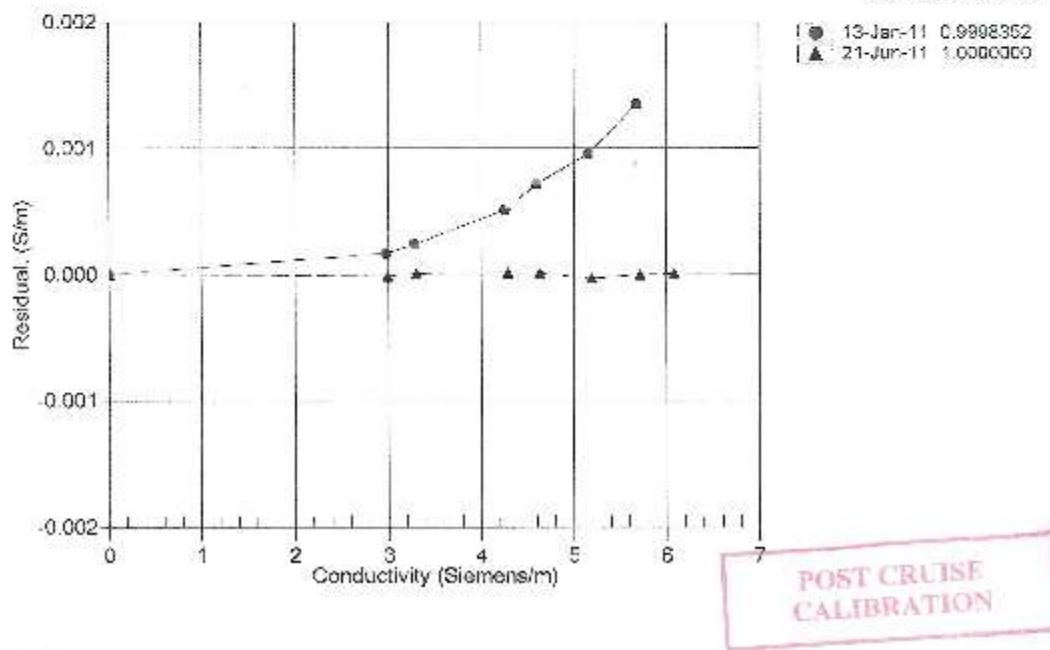

Transmissometer

PO Box 518
620 Applegate St.
Philomath, OR 97370



(541) 929-5650
Fax (541) 929-5277
www.wetlabs.com

C-Star Calibration

Date	November 4, 2011	S/N#	CST-830DR	Pathlength	25 cm
Analog output					
V_d	0.059 V				
V_{air}	4.868 V				
V_{ref}	4.713 V				
Temperature of calibration water				23.5 °C	
Ambient temperature during calibration				21.6 °C	

Relationship of transmittance (Tr) to beam attenuation coefficient (c), and pathlength (x, in meters): $Tr = e^{-cx}$

To determine beam transmittance: $Tr = (V_{sig} - V_{dark}) / (V_{ref} - V_{dark})$

To determine beam attenuation coefficient: $c = -1/x * \ln (Tr)$

V_d Meter output with the beam blocked. This is the offset.

V_{air} Meter output in air with a clear beam path.

V_{ref} Meter output with clean water in the path.

Temperature of calibration water: temperature of clean water used to obtain V_{ref} .

Ambient temperature: meter temperature in air during the calibration.

V_{sig} Measured signal output of meter.

Fluorometer

PO Box 518
620 Applegate St.
Philomath, OR 97370



(541) 929-5650
Fax (541) 929-5277
www.wetlabs.com

ECO Chlorophyll Fluorometer Characterization Sheet

Date: 9/7/2011

S/N: FLRTD-398

Chlorophyll concentration expressed in $\mu\text{g/l}$ can be derived using the equation:

$$\text{CHL} (\mu\text{g/l}) = \text{Scale Factor} * (\text{Output} - \text{Dark Counts})$$

	Analog	Analog		Digital
	Range 1	Range 2	Range 4 (default)	
Dark Counts	0.097	0.053	0.031 V	70 counts
Scale Factor (SF)	6	13	25 $\mu\text{g}/\text{V}$	0.0076 $\mu\text{g}/\text{count}$
Maximum Output	4.96	4.96	4.96 V	16328 counts
Resolution	1.0	1.0	1.0 mV	1.0 counts

Ambient temperature during characterization

22.3 °C

Analog Range: 1 (most sensitive, 0–4,000 counts), 2 (midrange, 0–8,000 counts), 4 (entire range, 0–16,000 counts).

Dark Counts: Signal output of the meter in clean water with black tape over detector.

SF: Determined using the following equation: $SF = x + (\text{output} - \text{dark counts})$, where x is the concentration of the solution used during instrument characterization. SF is used to derive instrument output concentration from the raw signal output of the fluorometer.

Maximum Output: Maximum signal output the fluorometer is capable of.

Resolution: Standard deviation of 1 minute of collected data.

The relationship between fluorescence and chlorophyll-a concentrations *in-situ* is highly variable. The scale factor listed on this document was determined using a mono-culture of phytoplankton (*Thalassiosira weissflogii*). The population was assumed to be reasonably healthy and the concentration was determined by using the absorption method. To accurately determine chlorophyll concentration using a fluorometer, you must perform secondary measurements on the populations of interest. This is typically done using extraction-based measurement techniques on discrete samples. For additional information on determining chlorophyll concentration see "Standard Methods for the Examination of Water and Wastewater" part 10200 H, published jointly by the American Public Health Association, American Water Works Association, and the Water Environment Federation.

Temperature/Relative Humidity



CERTIFICATE OF CALIBRATION AND TESTING

CUSTOMER: RAYTHEON TECHNICAL SERVICES CO LLC
P.O. NUMBER: RR59937-01
MODEL: 41372LC
SERIAL NUMBER: TS06719

R. M. Young Company certifies that the above equipment was inspected and calibrated prior to shipment in accordance with established manufacturing and testing procedures. Standards established by R.M. Young Company for calibrating the measuring and test equipment used in controlling product quality are traceable to the National Institute of Standards and Technology.

To maintain these specifications, regular maintenance intervals are essential.

Date of Certification: 26 August 2011

R.M. Young Company

Ryan Phillips

R.M. YOUNG COMPANY 2801 Aero Park Drive, Traverse City Michigan 49686-9171 USA
TEL: (231) 946-3980 FAX: (231) 946-4772 Email: met.sales@youngusa.com
ISO 9001:2008 CERTIFIED

Barometer

R.M. Young Company
280 Aero Park Drive
Traverse City, Michigan 49686 USA

CALIBRATION REPORT
Barometric Pressure Sensor

Customer: Raytheon Technical Services Company LLC

Test Number: 1603-01B
Test Date: 3 June 2011

Customer PO: RR58987-01
Sales Order: 1959

Test Sensor:	
Model: 61201	Serial Number: BP01150
Description: Barometric Pressure Sensor	

Report of calibration comparison of test barometric pressure sensor with National Institute of Standards and Technology traceable standard pressure calibrator at five pressures in the R.M. Young Company controlled pressure facility. Calibration accuracy – 1.0 hPa.

Reference Pressure (hPa)	Voltage Output (millivolts)	Indicated (1) Pressure (hPa)
800.0	0	800.0
875.0	1251	875.1
950.0	2501	950.1
1025.0	3750	1025.0
1100.0	4998	1099.9

(1) Calculated from voltage output

All reference equipment used in this calibration procedure have been tested by comparison to traceable standards certified by the National Institute of Standards and Technology.

Reference Instrument	Serial # NIST Test Reference
Druck Pressure Controller Model DP1515	51500497 UKAS Lab 0221
Fluke Multimeter Model 8000A	4885407 234027

Tested By: E. Chernomyrdin

M E T E O R O - O G I C A L I N S T R U M E N T S
Tel: 231-946-3900 Fax: 231-946-4772 Email: rel.sales@youngusa.com Web: www.youngusa.com
ISO 9001:2008 CERTIFIED

PIR

THE EPPELEY LABORATORY, INC.

12 Sheffield Avenue, PO Box 419, Newport, Rhode Island USA 02840
 Phone: 401.847.1020 Fax: 401.847.1031 Email: info@eppeleylab.com

STANDARDIZATION OF EPPELEY PRECISION INFRARED RADIOMETER Model PIR

Serial Number: 32031F1

Resistance: 709 Ω at 23°C
 Temperature Compensation Range: -20° to +40°C

This pyrgeometer has been compared against Eppley's Blackbody Calibration System under radiation intensities of approximately 200 watts meter⁻² and an average ambient temperature of 28°C as measured by Standard Omega Temperature Probe, RTD41.

As a result of a series of comparisons, it has been found to have a sensitivity of:

$$3.79 \times 10^{-6} \text{ volts/watts meter}^2$$

The calculation of this constant is based on the fact that the relationship between radiation intensity and emf is rectilinear up to intensities of 700 watts meter⁻². This radiometer is linear to within ±1.0% up to this intensity.

The calibration of this instrument is traceable to the International Practical Temperature Scale (IPTS) through a precision low-temperature blackbody.

Eppley recommends a minimum calibration cycle of five (5) years but encourages annual calibrations for highest measurement accuracy. Unless otherwise stated in the remarks section below or on the Sales Order, the results are "AS FOUND / AS LEFT".

Shipped to: Lockheed Martin (NSF)
 Port Hueneme, CA

Date of Test: July 16, 2012

S.O. Number: 63509
 Date: July 18, 2012

In Charge of Test: *Bruce L. Heintz*
 Reviewed by: *Thomas D. Kirk*

Remarks:

PSP

THE EPPELEY LABORATORY, INC.

12 Sheffield Avenue, PO Box 419, Newport, Rhode Island USA 02840
 Phone: 401.847.1020 Fax: 401.847.1031 Email: info@eppleylab.com

STANDARDIZATION OF EPPELEY PRECISION SPECTRAL PYRANOMETER Model PSP

Serial Number: 31701F3

Resistance: 674 Ω at 23°C

Temperature Compensation Range: -20° to +40°C

This radiometer has been compared with Standard Precision Spectral Pyranometer, Serial Number 21231F3 in Eppley's Integrating Hemisphere under radiation intensities of approximately 700 watts meter⁻² (roughly one half a solar constant).

As a result of a series of comparisons, it has been found to have a sensitivity of:

$$8.21 \times 10^{-6} \text{ volts/watts meter}^{-2}$$

The calculation of this constant is based on the fact that the relationship between radiation intensity and cmf is rectilinear to intensities of 1400 watts meter⁻². This radiometer is linear to within ± 0.5% up to this intensity.

The calibration of this instrument is traceable to standard self-calibrating cavity pyrheliometers in terms of the Système Internationale des Unités (SI units), which participated in the Eleventh International Pyrheliometric Comparisons (IPC XI) at Davos, Switzerland in September-October 2010.

Eppley recommends a minimum calibration cycle of five (5) years but encourages annual calibrations for highest measurement accuracy. Unless otherwise stated in the remarks section below or on the Sales Order, the results are "AS FOUND / AS LEFT".

Useful conversion facts: $1 \text{ cal cm}^{-2} \text{ min}^{-1} = 697.3 \text{ watts meter}^{-2}$
 $1 \text{ BTU}/(\text{ft}^2 \cdot \text{hr}^{-1}) = 3.153 \text{ watts meter}^{-2}$

Shipped to: Lockheed Martin (NSF)
 Port Hueneme, CA

Date of Test: July 13, 2012

S.O. Number: 63509
 Date: July 18, 2012

In Charge of Test: *Dale D. Beatty*

Reviewed by: *Thomas D. Kirk*

Remarks: Replaced Shield

Digital Remote Temperature

SEA-BIRD ELECTRONICS, INC.
13431 NE 20th Street, Bellevue, Washington, 98005-2010 USA
 Phone: (425) 643 - 9866 Fax (425) 643 - 9954 Email: seabird@seabird.com

SENSOR SFR1A1. NTRMR: 0389
 CALIBRATION DATE: 09-Sep-10

SBE 38 TEMPERATURE CALIBRATION DATA
 ITS-90 TEMPERATURE SCALE

ITS-90 COEFFICIENTS


a0 = 5.882900e-005
 a1 = 2.715026e-004
 a2 = -2.261327e-006
 a3 = 1.468299e-007

BATH TEMP (ITS-90)	INSTRUMENT OUTPUT	INST TEMP (ITS-90)	RESIDUAL (ITS-90)
-1.50000	749666.3	-1.49998	0.00002
1.00000	667856.9	0.99999	-0.00001
4.50000	569777.7	4.49997	-0.00003
8.00000	487732.7	8.00000	0.00000
11.50000	418862.9	11.50000	0.00000
15.00000	360856.1	15.00002	0.00002
18.50000	311838.4	18.50002	0.00002
22.00000	270284.2	22.00001	0.00001
25.50000	234947.7	25.49997	-0.00003
29.00000	204807.1	28.99996	-0.00004
32.50000	179022.3	32.50003	0.00003

$$\text{Temperature ITS-90} = 1/\{a0 + a1[\ln(n)] + a2[\ln^2(n)] + a3[\ln^3(n)]\} - 273.15 \text{ (°C)}$$

Residual = instrument temperature - bath temperature

Date, Delta T (mdeg C)

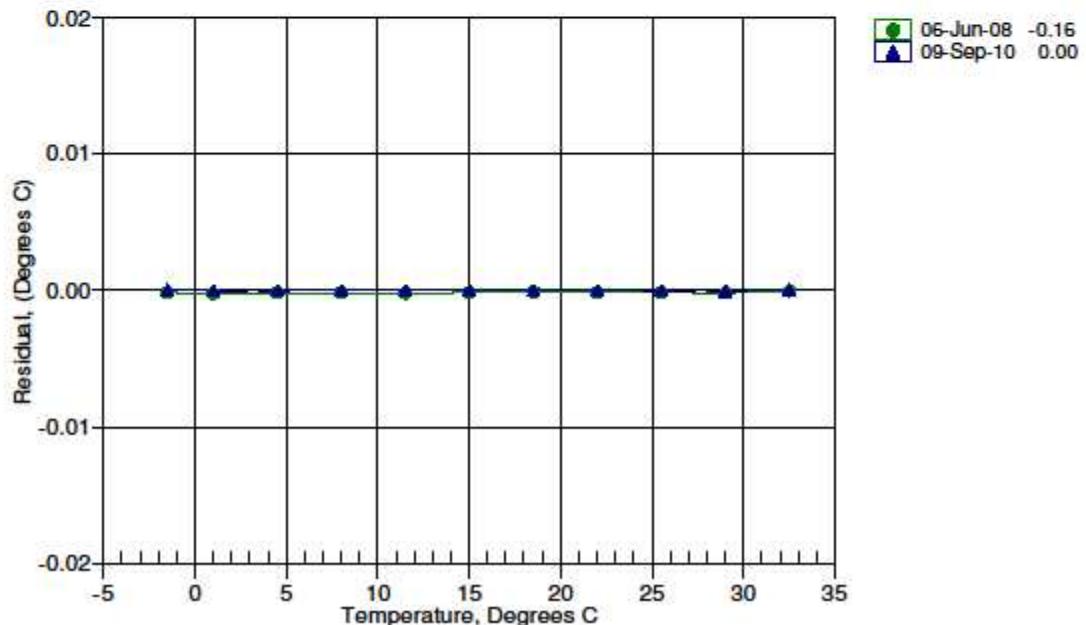

CTD Calibration Sheets

CTD Fish

SEA-BIRD ELECTRONICS, INC.
13431 NE 20th Street, Bellevue, Washington, 98005-2010 USA
 Phone: (425) 643 - 9866 Fax (425) 643 - 9954 Email: seabird@seabird.com

SENSOR SERIAL NUMBER: 0328
 CALIBRATION DATE: 19-Aug-11

SBE9plus PRESSURE CALIBRATION DATA
 10000 psia S/N 53980


DIGIQUARTZ COEFFICIENTS:

C1 =	-5.847002e+004	AD590M, AD590B, SLOPE AND OFFSET:
C2 =	6.910390e-001	AD590M = 1.13300e-002
C3 =	1.753360e-002	AD590B = -8.47592e+000
D1 =	4.241600e-002	Slope = 0.99998
D2 =	0.000000e+000	Offset = -0.8777 (dbars)
T1 =	3.026040e+001	
T2 =	-1.938830e-004	
T3 =	4.330190e-006	
T4 =	2.020250e-009	
T5 =	0.000000e+000	

PRESSURE (PSIA)	INST OUTPUT(Hz)	INST TEMP(C)	INST OUTPUT(PSIA)	CORRECTED INST OUTPUT (PSIA)	RESIDUAL (PSIA)
14.646	33053.38	23.5	16.091	14.818	0.172
2015.118	33613.29	23.6	2016.419	2015.104	-0.014
4015.087	34162.38	23.6	4016.439	4015.082	-0.005
6015.115	34701.27	23.7	6016.559	6015.161	0.046
8015.276	35230.45	23.7	8016.782	8015.342	0.066
10015.529	35750.28	23.7	10016.841	10015.359	-0.169
8015.286	35230.46	23.7	8016.833	8015.393	0.108
6015.178	34701.29	23.8	6016.622	6015.224	0.046
4015.109	34162.39	23.8	4016.460	4015.104	-0.005
2015.058	33613.25	23.8	2016.279	2014.965	-0.093
14.643	33053.28	23.8	15.764	14.491	-0.152

Residual = corrected instrument pressure - reference pressure

Date, Avg Offset(psia)

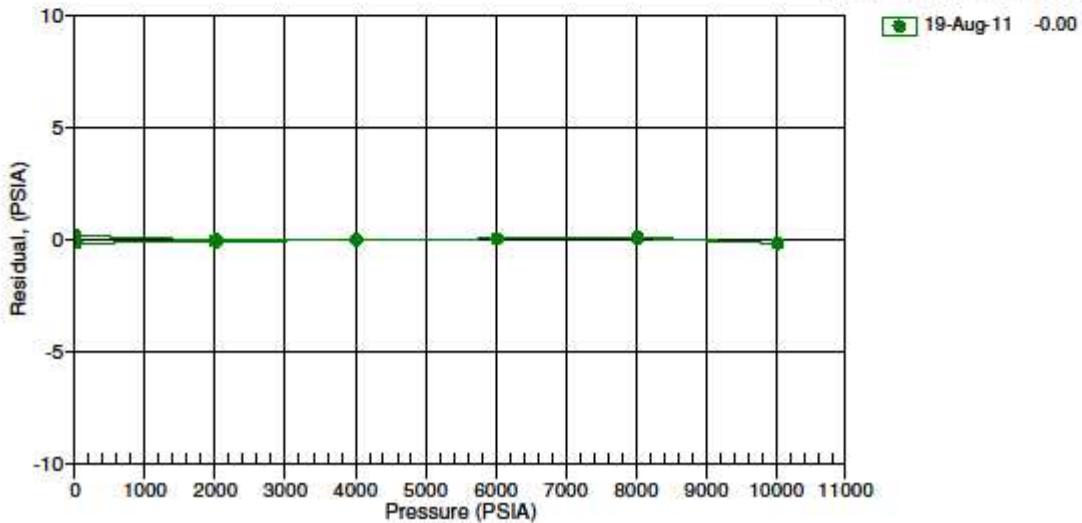

df

Primary Temperature

SEA-BIRD ELECTRONICS, INC.
13431 NE 20th Street, Bellevue, Washington, 98005-2010 USA
 Phone: (425) 643 - 9866 Fax (425) 643 - 9954 Email: seabird@seabird.com

SENSOR SERIAL NUMBER: 2444
 CALIBRATION DATE: 10-Aug-11

SBE3 TEMPERATURE CALIBRATION DATA
 ITS-90 TEMPERATURE SCALE

ITS-90 COEFFICIENTS

g = 4.38198263e-003
 h = 6.50251978e-004
 i = 2.45603063e-005
 j = 2.36363548e-006
 f0 = 1000.0

IPTS-68 COEFFICIENTS

a = 3.68121196e-003
 b = 6.04279345e-004
 c = 1.66465578e-005
 d = 2.36524770e-006
 f0 = 3064.758

BATH TEMP (ITS-90)	INSTRUMENT FREO (Hz)	INST TEMP (ITS-90)	RESIDUAL (ITS-90)
-1.4999	3064.758	-1.5000	-0.00007
1.0000	3240.153	1.0001	0.00009
4.5001	3497.749	4.5001	0.00003
8.0000	3769.744	8.0000	0.00004
11.5000	4056.533	11.5000	-0.00003
15.0001	4358.489	14.9999	-0.00015
18.5001	4675.986	18.5001	0.00000
22.0001	5009.349	22.0002	0.00008
25.5001	5358.910	25.5002	0.00006
29.0001	5724.992	29.0001	-0.00001
32.5001	6107.913	32.5001	-0.00004

$$\text{Temperature ITS-90} = 1/(g + h[\ln(f/f_0)] + i[\ln^2(f/f_0)] + j[\ln^3(f/f_0)]) - 273.15 \text{ (°C)}$$


$$\text{Temperature IPTS-68} = 1/(a + b[\ln(f/f_0)] + c[\ln^2(f/f_0)] + d[\ln^3(f/f_0)]) - 273.15 \text{ (°C)}$$

Following the recommendation of JPOTS: T_{eff} is assumed to be $1.00024 * T_{\text{90}}$ (-2 to 35 °C)

Residual = instrument temperature - bath temperature

Date, Offset(mdeg C)

16-Apr-10 -0.06
 10-Aug-11 -0.00

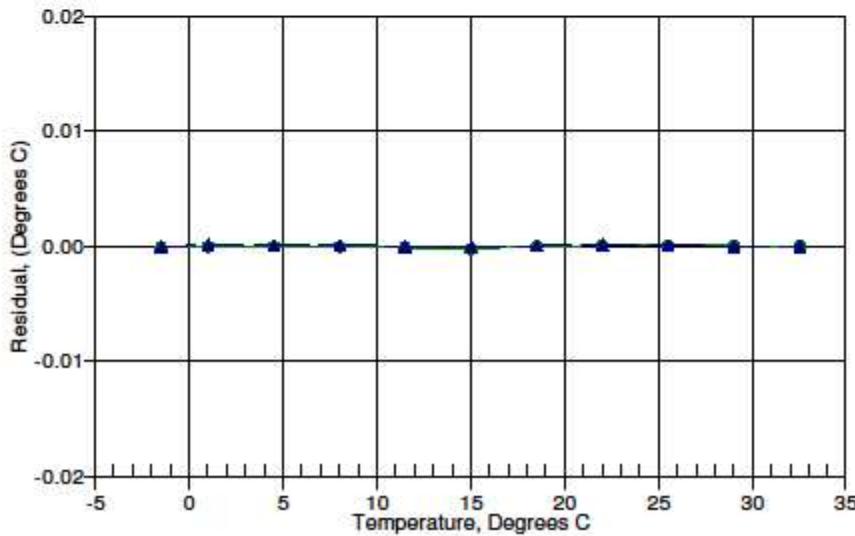

Secondary Temperature

SEA-BIRD ELECTRONICS, INC.
13431 NE 20th Street, Bellevue, Washington, 98005-2010 USA
 Phone: (425) 643 - 9866 Fax (425) 643 - 9954 Email: seabird@seabird.com

SENSOR SERIAL NUMBER: 4573
 CALIBRATION DATE: 08-Apr-11

SBE3 TEMPERATURE CALIBRATION DATA
 ITS-90 TEMPERATURE SCALE

ITS-90 COEFFICIENTS

g = 4.39271311e-003
 h = 6.43125162e-004
 i = 2.21436866e-005
 j = 1.93106695e-006
 f0 = 1000.0

IPTS-68 COEFFICIENTS

a = 3.68120986e-003
 b = 6.00091492e-004
 c = 1.55255505e-005
 d = 1.93252796e-006
 f0 = 3149.058

BATH TEMP (ITS-90)	INSTRUMENT FREO (Hz)	INST TEMP (ITS-90)	RESIDUAL (ITS-90)
-1.4999	3149.058	-1.4998	0.00008
1.0002	3330.544	1.0001	-0.00011
4.5002	3597.176	4.5002	-0.00003
8.0002	3878.805	8.0002	-0.00001
11.5002	4175.846	11.5003	0.00006
15.0001	4488.678	15.0002	0.00009
18.5001	4817.695	18.5001	0.00001
22.0002	5163.273	22.0001	-0.00015
25.5001	5525.782	25.5001	0.00002
29.0002	5905.561	29.0002	0.00003
32.5002	6302.923	32.5002	0.00001

$$\text{Temperature ITS-90} = 1/(g + h[\ln(f/f_0)] + i[\ln^2(f/f_0)] + j[\ln^3(f/f_0)]) - 273.15 \text{ (°C)}$$


$$\text{Temperature IPTS-68} = 1/(a + b[\ln(f/f_0)] + c[\ln^2(f/f_0)] + d[\ln^3(f/f_0)]) - 273.15 \text{ (°C)}$$

Following the recommendation of JPOTS: T_{eff} is assumed to be $1.00024 * T_{\text{90}}$ (-2 to 35 °C)

Residual = instrument temperature - bath temperature

Date, Offset(mdeg C)

05-May-10	-1.76
08-Apr-11	0.00

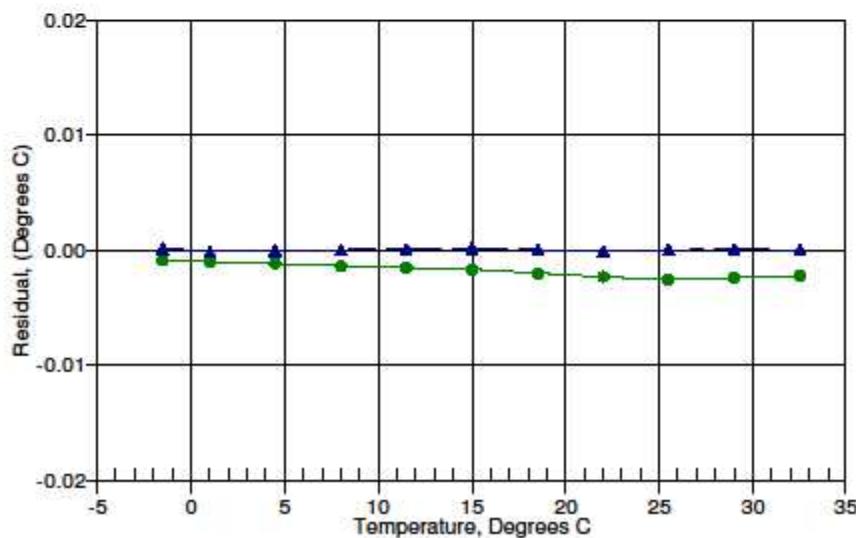

Primary Conductivity

SEA-BIRD ELECTRONICS, INC.
13431 NE 20th Street, Bellevue, Washington, 98005-2010 USA
 Phone: (425) 643 - 9866 Fax (425) 643 - 9954 Email: seabird@seabird.com

SENSOR SERIAL NUMBER: 1223
 CALIBRATION DATE: 13-Apr-11

SBE4 CONDUCTIVITY CALIBRATION DATA
 PSS 1978: C(35,15,0) = 4.2914 Siemens/meter

GHJ COEFFICIENTS
 g = -3.95426291e+000
 h = 4.97048895e-001
 i = -1.58213726e-004
 j = 3.52839485e-005
 CPcor = -9.5700e-008 (nominal)
 CTcor = 3.2500e-006 (nominal)

ABCDM COEFFICIENTS
 a = 1.17664040e-005
 b = 4.96624588e-001
 c = -3.95333778e+000
 d = -8.91233617e-005
 m = 4.3
 CPcor = -9.5700e-008 (nominal)


BATH TEMP (ITS-90)	BATH SAL (PSU)	BATH COND (Siemens/m)	INST FREQ (kHz)	INST COND (Siemens/m)	RESIDUAL (Siemens/m)
0.0000	0.0000	0.00000	2.82101	0.00000	0.00000
-1.0001	34.9585	2.81495	8.02862	2.81497	0.00002
1.0000	34.9588	2.98698	8.24017	2.98696	-0.00002
15.0000	34.9580	4.28715	9.68894	4.28714	-0.00001
18.4999	34.9577	4.63509	10.04060	4.63508	-0.00001
29.0000	34.9553	5.72251	11.06634	5.72256	0.00005
32.5000	34.9460	6.09604	11.39676	6.09601	-0.00003

$$\text{Conductivity} = (g + hf^2 + if^3 + jf^4) / 10(1 + \delta t + \epsilon p) \text{ Siemens/meter}$$

$$\text{Conductivity} = (af^m + bf^2 + c + dt) / [10(1 + \epsilon p)] \text{ Siemens/meter}$$

t = temperature[°C]; p = pressure[decibars]; δ = CTcor; ε = CPcor;

Residual = (instrument conductivity - bath conductivity) using g, h, i, j coefficients

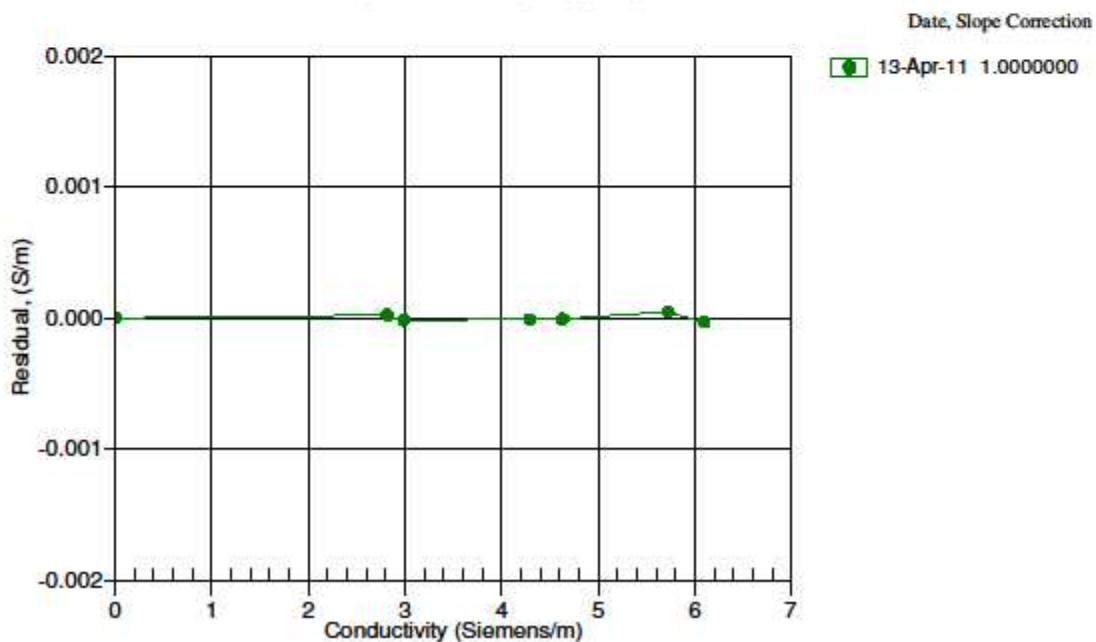

Secondary Conductivity

SEA-BIRD ELECTRONICS, INC.
13431 NE 20th Street, Bellevue, Washington, 98005-2010 USA
 Phone: (425) 643 - 9866 Fax (425) 643 - 9954 Email: seabird@seabird.com

SENSOR SERIAL NUMBER: 3534
 CALIBRATION DATE: 10-Aug-11

SBE4 CONDUCTIVITY CALIBRATION DATA
 PSS 1978: C(35,15,0) = 4.2914 Siemens/meter

GHIJ COEFFICIENTS
 g = -9.95509288e+000
 h = 1.21141094e+000
 i = -1.50326408e-003
 j = 1.54167085e-004
 CPcor = -9.5700e-008 (nominal)
 CTcor = 3.2500e-006 (nominal)

ABCDM COEFFICIENTS
 a = 3.95557642e-007
 b = 1.20702475e+000
 c = -9.94414017e+000
 d = -8.22009502e-005
 m = 6.1
 CPcor = -9.5700e-008 (nominal)

BATH TEMP (ITS-90)	BATH SAL (PSU)	BATH COND (Siemens/m)	INST FREQ (kHz)	INST COND (Siemens/m)	RESIDUAL (Siemens/m)
0.0000	0.0000	0.00000	2.87027	0.00000	0.00000
-1.0000	34.7055	2.79648	5.60312	2.79647	-0.00001
1.0000	34.7065	2.96747	5.72802	2.96748	0.00001
15.0000	34.7077	4.25970	6.59529	4.25971	0.00001
18.5000	34.7079	4.60554	6.80853	4.60552	-0.00002
29.0000	34.7059	5.68627	7.43523	5.68629	0.00002
32.5001	34.6974	6.05761	7.63854	6.05760	-0.00001


$$\text{Conductivity} = (g + hf^2 + if^3 + jf^4) / 10(1 + \delta t + \epsilon p) \text{ Siemens/meter}$$

$$\text{Conductivity} = (af^m + bf^2 + c + dt) / [10(1 + \epsilon p)] \text{ Siemens/meter}$$

t = temperature [°C]; p = pressure[decibars]; δ = CTcor; ϵ = CPcor;

Residual = (instrument conductivity - bath conductivity) using g, h, i, j coefficients

Date, Slope Correction

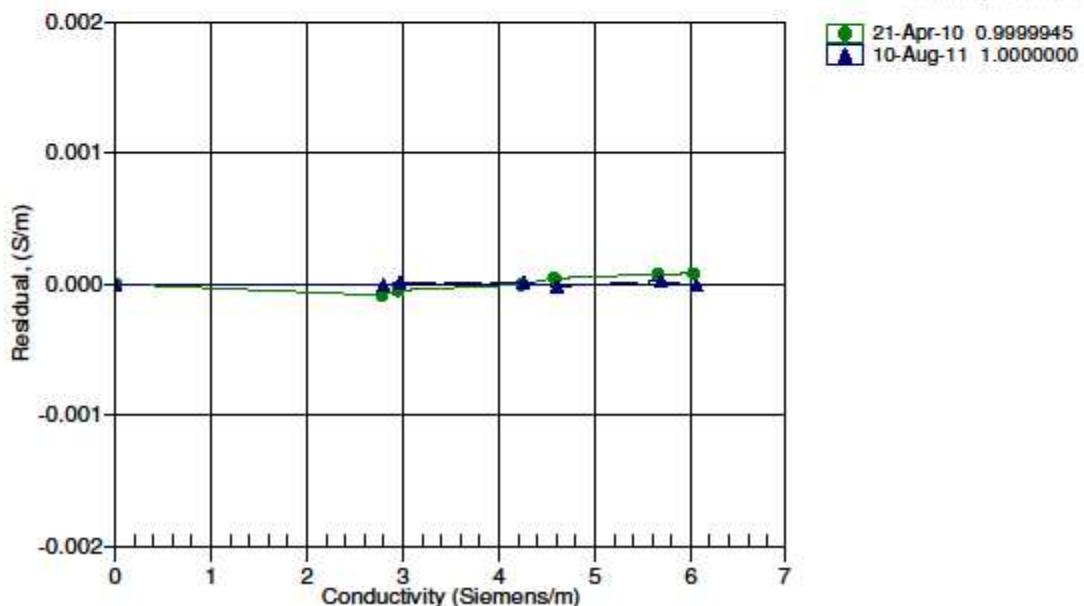

Primary Dissolved Oxygen

Sea-Bird Electronics, Inc.
13431 NE 20th Street, Bellevue, WA 98005-2010 USA
Phone: (+1) 425-643-9866 Fax (+1) 425-643-9954 Email: seabird@seabird.com

SENSOR SERIAL NUMBER: 0150
 CALIBRATION DATE: 04-Aug-12

SBE 43 OXYGEN CALIBRATION DATA


COEFFICIENTS	A = -2.5246e-003	NOMINAL DYNAMIC COEFFICIENTS
Soc = 0.5201	B = 6.5850e-005	D1 = 1.92634e-4 H1 = -3.30000e-2
Voffset = -0.4806	C = -1.4865e-006	D2 = -4.64803e-2 H2 = 5.00000e+3
Tau20 = 1.03	E nominal = 0.036	H3 = 1.45000e+3

BATH OX (mM/l)	BATH TEMP ITS-90	BATH SAL PSU	INSTRUMENT OUTPUT(VOLTS)	INSTRUMENT OXYGEN(mM/l)	RESIDUAL (mM/l)
1.23	2.00	0.04	0.725	1.23	-0.01
1.24	6.00	0.04	0.757	1.23	-0.00
1.25	12.00	0.04	0.806	1.24	-0.00
1.26	20.00	0.04	0.875	1.26	0.00
1.27	30.00	0.04	0.971	1.27	0.01
1.27	26.00	0.04	0.933	1.27	0.01
4.19	2.00	0.04	1.318	4.19	-0.00
4.20	12.00	0.04	1.578	4.20	0.00
4.21	6.00	0.04	1.422	4.21	-0.00
4.21	20.00	0.04	1.802	4.21	0.00
4.22	30.00	0.04	2.110	4.23	0.01
4.22	26.00	0.04	1.985	4.23	0.01
6.73	30.00	0.04	3.072	6.72	-0.01
6.75	26.00	0.04	2.880	6.75	-0.00
6.75	12.00	0.04	2.243	6.75	-0.00
6.77	20.00	0.04	2.602	6.76	-0.00
6.77	2.00	0.04	1.833	6.77	0.00
6.78	6.00	0.04	1.999	6.79	0.00

$$\text{Oxygen (mM/l)} = \text{Soc} * (V + \text{Voffset}) * (1.0 + A * T + B * T^2 + C * T^3) * \text{OxSol}(T, S) * \exp(E * P / K)$$

V = voltage output from SBE43, T = temperature [deg C], S = salinity [PSU], K = temperature [Kelvin]

OxSol(T, S) = oxygen saturation [mM/l], P = pressure [dbar], Residual = instrument oxygen - bath oxygen

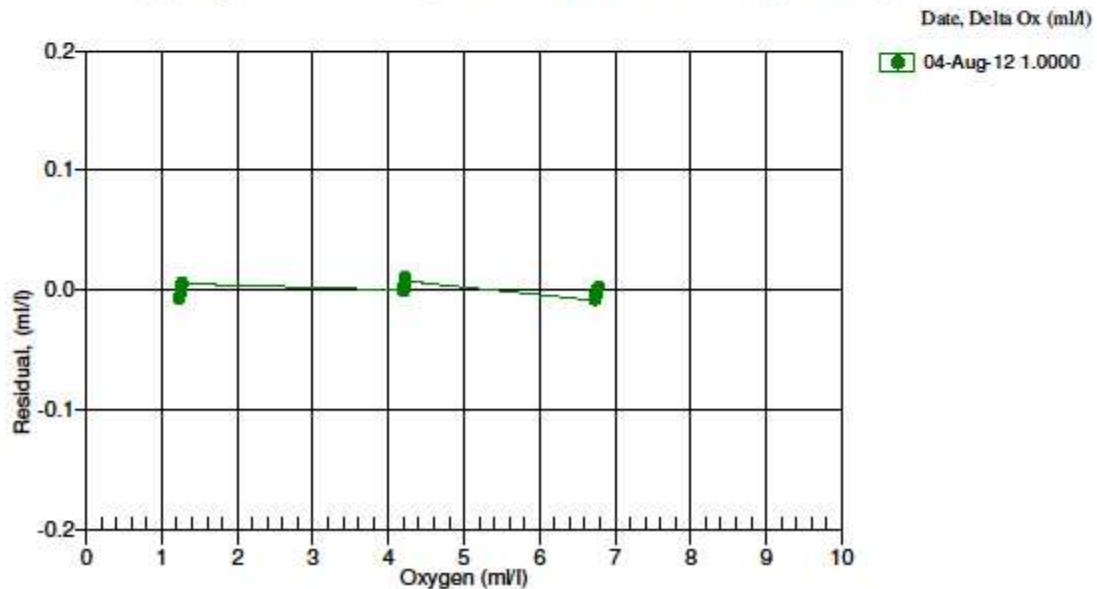

Secondary Dissolved Oxygen

Sea-Bird Electronics, Inc.
13431 NE 20th Street, Bellevue, WA 98005-2010 USA
Phone: (+1) 425-643-9866 Fax (+1) 425-643-9954 Email: seabird@seabird.com

SENSOR SERIAL NUMBER: 0201
 CALIBRATION DATE: 27-Jan-12

SBE 43 OXYGEN CALIBRATION DATA


COEFFICIENTS	A = -2.9971e-003	NOMINAL DYNAMIC COEFFICIENTS
Soc = 0.5626	B = 1.1966e-004	D1 = 1.92634e-4 H1 = -3.30000e-2
Voffset = -0.4959	C = -2.1453e-006	D2 = -4.64803e-2 H2 = 5.00000e+3
Tau20 = 1.28	E nominal = 0.036	H3 = 1.45000e+3

BATH OX (mL/l)	BATH TEMP ITS-90	BATH SAL PSU	INSTRUMENT OUTPUT(VOLTS)	INSTRUMENT OXYGEN(mL/l)	RESIDUAL (mL/l)
1.25	2.00	0.04	0.727	1.25	-0.00
1.25	6.00	0.04	0.756	1.26	0.00
1.26	12.00	0.04	0.800	1.26	0.01
1.27	20.00	0.04	0.864	1.28	0.01
1.27	26.00	0.04	0.912	1.28	0.01
1.28	30.00	0.04	0.947	1.29	0.01
4.15	6.00	0.04	1.352	4.14	-0.01
4.16	12.00	0.04	1.497	4.15	-0.01
4.16	20.00	0.04	1.692	4.15	-0.01
4.16	2.00	0.04	1.261	4.14	-0.02
4.17	30.00	0.04	1.956	4.17	0.00
4.18	26.00	0.04	1.853	4.18	-0.00
6.65	30.00	0.04	2.823	6.64	-0.00
6.68	26.00	0.04	2.664	6.68	0.00
6.69	20.00	0.04	2.420	6.69	-0.00
6.71	12.00	0.04	2.114	6.71	0.00
6.78	6.00	0.04	1.901	6.78	0.01
6.84	2.00	0.04	1.762	6.85	0.01

$$\text{Oxygen (mL/l)} = \text{Soc} * (\text{V} + \text{Voffset}) * (1.0 + \text{A} * \text{T} + \text{B} * \text{T}^2 + \text{C} * \text{T}^3) * \text{OxSol}(\text{T}, \text{S}) * \exp(\text{E} * \text{P} / \text{K})$$

V = voltage output from SBE43, T = temperature [deg C], S = salinity [PSU] K = temperature [deg K]

OxSol(T,S) = oxygen saturation [mL/l], P = pressure [dbar], Residual = instrument oxygen - bath oxygen

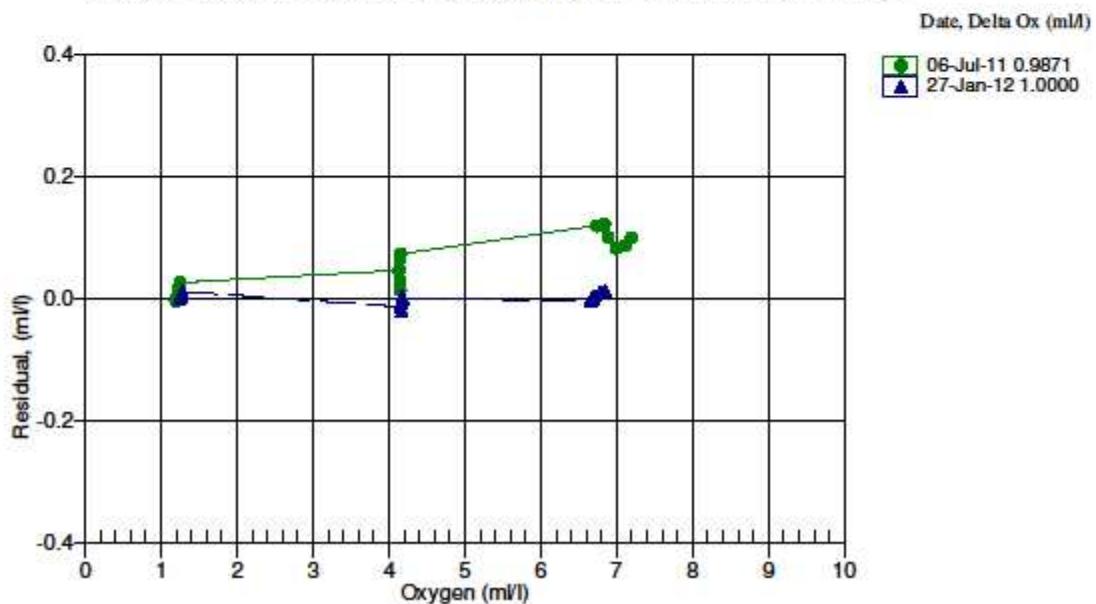

PAR Sensor**Biospherical Instruments Inc****CALIBRATION CERTIFICATE****UNDERWATER PAR SENSOR WITH LOG AMPLIFIER**

Calibration Date: <u>02/09/2</u>	Job No.: <u>R11220</u>																																																																																										
Model Number: <u>CSP200L</u>																																																																																											
Serial Number: <u>4714</u>																																																																																											
Operator: <u>LPG</u>																																																																																											
Standard Lamp: <u>90573/10/11</u>																																																																																											
Operating Voltage Range: <u>6</u> to <u>15</u> VDC (+)																																																																																											
Note: The CSP-200 uses a log amplifier to measure the detector signal current with $V = \log I$ (Amps) / IRf. To calculate irradiance, use this formula:																																																																																											
$Irradiance = Calibration factor * (10^V_Light Signal Voltage - 10^V_Dark Voltage)$																																																																																											
With the appropriate (solar corrected) Irradiance Calibration Factor:																																																																																											
Dry Calibration Factor: <u>2.17E+13</u>	<u>quanta/cm²·sec/amps</u>	<u>3.60E-05</u>	<u>μEinsteins/cm²·sec/amps</u>																																																																																								
Wat Calibration Factor: <u>3.83E+13</u>	<u>quanta/cm²·sec/amps</u>	<u>6.36E-05</u>	<u>μEinsteins/cm²·sec/amps</u>																																																																																								
Sensor Test Data and Results⁽¹⁾																																																																																											
<table border="1"> <tr> <td>Sensor Supply Current (Dark): <u>02.7</u> mA</td> <td>Supply Voltage: <u>6</u> Volts</td> <td colspan="4"></td> </tr> <tr> <td>Lamp Integrated PAR Irradiance: <u>9.79E+15</u> quanta/cm²·sec</td> <td><u>0.01828</u> μEinsteins/cm²·sec</td> <td colspan="4"></td> </tr> <tr> <td>'SC3 Immersion Coefficient: <u>0.5604</u></td> <td>Scalar Correction: <u>1</u></td> <td colspan="2">PAR Solar Correction: <u>1.0000</u></td> <td colspan="2"></td> </tr> <tr> <th>Nominal Filter OD</th> <th>Calibrated Trans.</th> <th>Sensor Voltage</th> <th>Measured Trans.</th> <th>Measured Signal (Amps)</th> <th>Estimated Signal (Amps)</th> <th>Cal. Output (Volts)</th> <th>Error (Volts)</th> <th>Error (%)</th> <th>Test Irrad. (quanta/cm²·sec)</th> </tr> <tr> <td>No Filter</td> <td>100.00%</td> <td>2.656</td> <td>100.00%</td> <td><u>4.53E-08</u></td> <td><u>4.53E-08</u></td> <td><u>2.657</u></td> <td><u>0.001</u></td> <td><u>0.0</u></td> <td><u>9.79E+15</u></td> </tr> <tr> <td>0.3</td> <td>36.10%</td> <td>2.214</td> <td>35.92%</td> <td><u>1.63E-08</u></td> <td><u>1.63E-08</u></td> <td><u>2.217</u></td> <td><u>0.004</u></td> <td><u>0.5</u></td> <td><u>3.52E+15</u></td> </tr> <tr> <td>0.5</td> <td>27.60%</td> <td>2.104</td> <td>27.78%</td> <td><u>1.26E-08</u></td> <td><u>1.25E-08</u></td> <td><u>2.102</u></td> <td><u>-0.001</u></td> <td><u>-0.7</u></td> <td><u>2.72E+15</u></td> </tr> <tr> <td>1</td> <td>9.27%</td> <td>1.648</td> <td>9.51%</td> <td><u>4.31E-09</u></td> <td><u>4.20E-09</u></td> <td><u>1.638</u></td> <td><u>-0.009</u></td> <td><u>-2.5</u></td> <td><u>9.31E+14</u></td> </tr> <tr> <td>2</td> <td>1.11%</td> <td>0.920</td> <td>1.16%</td> <td><u>6.25E-10</u></td> <td><u>6.03E-10</u></td> <td><u>0.915</u></td> <td><u>0.013</u></td> <td><u>-4.2</u></td> <td><u>1.13E+14</u></td> </tr> <tr> <td>3</td> <td>0.05%</td> <td>0.270</td> <td>0.08%</td> <td><u>3.57E-11</u></td> <td><u>2.42E-11</u></td> <td><u>0.273</u></td> <td><u>-0.027</u></td> <td><u>-32.2</u></td> <td><u>7.71E+12</u></td> </tr> </table>				Sensor Supply Current (Dark): <u>02.7</u> mA	Supply Voltage: <u>6</u> Volts					Lamp Integrated PAR Irradiance: <u>9.79E+15</u> quanta/cm ² ·sec	<u>0.01828</u> μEinsteins/cm ² ·sec					'SC3 Immersion Coefficient: <u>0.5604</u>	Scalar Correction: <u>1</u>	PAR Solar Correction: <u>1.0000</u>				Nominal Filter OD	Calibrated Trans.	Sensor Voltage	Measured Trans.	Measured Signal (Amps)	Estimated Signal (Amps)	Cal. Output (Volts)	Error (Volts)	Error (%)	Test Irrad. (quanta/cm ² ·sec)	No Filter	100.00%	2.656	100.00%	<u>4.53E-08</u>	<u>4.53E-08</u>	<u>2.657</u>	<u>0.001</u>	<u>0.0</u>	<u>9.79E+15</u>	0.3	36.10%	2.214	35.92%	<u>1.63E-08</u>	<u>1.63E-08</u>	<u>2.217</u>	<u>0.004</u>	<u>0.5</u>	<u>3.52E+15</u>	0.5	27.60%	2.104	27.78%	<u>1.26E-08</u>	<u>1.25E-08</u>	<u>2.102</u>	<u>-0.001</u>	<u>-0.7</u>	<u>2.72E+15</u>	1	9.27%	1.648	9.51%	<u>4.31E-09</u>	<u>4.20E-09</u>	<u>1.638</u>	<u>-0.009</u>	<u>-2.5</u>	<u>9.31E+14</u>	2	1.11%	0.920	1.16%	<u>6.25E-10</u>	<u>6.03E-10</u>	<u>0.915</u>	<u>0.013</u>	<u>-4.2</u>	<u>1.13E+14</u>	3	0.05%	0.270	0.08%	<u>3.57E-11</u>	<u>2.42E-11</u>	<u>0.273</u>	<u>-0.027</u>	<u>-32.2</u>	<u>7.71E+12</u>
Sensor Supply Current (Dark): <u>02.7</u> mA	Supply Voltage: <u>6</u> Volts																																																																																										
Lamp Integrated PAR Irradiance: <u>9.79E+15</u> quanta/cm ² ·sec	<u>0.01828</u> μEinsteins/cm ² ·sec																																																																																										
'SC3 Immersion Coefficient: <u>0.5604</u>	Scalar Correction: <u>1</u>	PAR Solar Correction: <u>1.0000</u>																																																																																									
Nominal Filter OD	Calibrated Trans.	Sensor Voltage	Measured Trans.	Measured Signal (Amps)	Estimated Signal (Amps)	Cal. Output (Volts)	Error (Volts)	Error (%)	Test Irrad. (quanta/cm ² ·sec)																																																																																		
No Filter	100.00%	2.656	100.00%	<u>4.53E-08</u>	<u>4.53E-08</u>	<u>2.657</u>	<u>0.001</u>	<u>0.0</u>	<u>9.79E+15</u>																																																																																		
0.3	36.10%	2.214	35.92%	<u>1.63E-08</u>	<u>1.63E-08</u>	<u>2.217</u>	<u>0.004</u>	<u>0.5</u>	<u>3.52E+15</u>																																																																																		
0.5	27.60%	2.104	27.78%	<u>1.26E-08</u>	<u>1.25E-08</u>	<u>2.102</u>	<u>-0.001</u>	<u>-0.7</u>	<u>2.72E+15</u>																																																																																		
1	9.27%	1.648	9.51%	<u>4.31E-09</u>	<u>4.20E-09</u>	<u>1.638</u>	<u>-0.009</u>	<u>-2.5</u>	<u>9.31E+14</u>																																																																																		
2	1.11%	0.920	1.16%	<u>6.25E-10</u>	<u>6.03E-10</u>	<u>0.915</u>	<u>0.013</u>	<u>-4.2</u>	<u>1.13E+14</u>																																																																																		
3	0.05%	0.270	0.08%	<u>3.57E-11</u>	<u>2.42E-11</u>	<u>0.273</u>	<u>-0.027</u>	<u>-32.2</u>	<u>7.71E+12</u>																																																																																		
Dark Before: <u>0.178</u> Volts	Light - No Filter Hldr.: <u>2.054</u> Volts	$I_{Rf} = 1.00E-10$ Amps	$I_{out} = 1.51E-10$ Amps	RG780	0.2018																																																																																						
Dark After - NPH: <u>0.178</u> Volts	Average Dark <u>0.178</u> Volts	$10^{V_{dark}} = 1.506607$ Amps																																																																																									
<p>Notes:</p> <ol style="list-style-type: none"> Annual calibration is recommended. There is increasing error associated with readings below zero. The collector should be cleaned frequently with alcohol. This section is for internal use and for more advanced analysis. 																																																																																											

QSP-200L,QSP23J0(2J05-1)

Fluorometer

PO Box 518
620 Applegate St.
Philomath, OR 97370



(541) 929-5650
Fax (541) 929-5277
www.wetlabs.com

ECO Chlorophyll Fluorometer Characterization Sheet

Date: 8/23/2012

S/N: FLRTD-399

Chlorophyll concentration expressed in $\mu\text{g/l}$ can be derived using the equation:

$$\text{CHL } (\mu\text{g/l}) = \text{Scale Factor} * (\text{Output} - \text{Dark Counts})$$

	Analog Range 1	Analog Range 2	Analog Range 4 (default)	Digital
Dark Counts	0.100	0.056	0.034 V	70 counts
Scale Factor (SF)	7	13	26 $\mu\text{g}/\text{VV}$	0.0079 $\mu\text{g}/\text{l}/\text{count}$
Maximum Output	4.95	4.95	4.95 V	16330 counts
Resolution	0.8	0.8	0.8 mV	1.0 counts

Ambient temperature during characterization 22.3 °C

Analog Range: 1 (most sensitive, 0–4,000 counts), 2 (midrange, 0–8,000 counts), 4 (entire range, 0–16,000 counts).

Dark Counts: Signal output of the meter in clean water with black tape over detector.

SF: Determined using the following equation: $SF = x / (\text{output} - \text{dark counts})$, where x is the concentration of the solution used during instrument characterization. SF is used to derive instrument output concentration from the raw signal output of the fluorometer.

Maximum Output: Maximum signal output the fluorometer is capable of.

Resolution: Standard deviation of 1 minute of collected data.

The relationship between fluorescence and chlorophyll-a concentrations *in-situ* is highly variable. The scale factor listed on this document was determined using a mono-culture of phytoplankton (*Thalassiosira weissflogii*). The population was assumed to be reasonably healthy and the concentration was determined by using the absorption method. To accurately determine chlorophyll concentration using a fluorometer, you must perform secondary measurements on the populations of interest. This is typically done using extraction-based measurement techniques on discrete samples. For additional information on determining chlorophyll concentration see "Standard Methods for the Examination of Water and Wastewater" part 10200 H, published jointly by the American Public Health Association, American Water Works Association, and the Water Environment Federation.

Transmissometer

PO Box 518
620 Applegate St.
Philomath, OR 97370



(541) 929-5650
Fax (541) 929-5277
www.wetlabs.com

C-Star Calibration

Date	December 21, 2010	S/N#	CST-406DR	Pathlength	25 cm
------	-------------------	------	-----------	------------	-------

V_d	Analog meter 0.059 V
V_{air}	4.854 V
V_{ref}	4.751 V

Temperature of calibration water	22.8 °C
Ambient temperature during calibration	21.7 °C

Relationship of transmittance (Tr) to beam attenuation coefficient (c), and pathlength (x, in meters): $Tr = e^{-cx}$

To determine beam transmittance: $Tr = (V_{sig} - V_{dark}) / (V_{ref} - V_{dark})$

To determine beam attenuation coefficient: $c = -1/x * \ln (Tr)$

V_d Meter output with the beam blocked. This is the offset.

V_{air} Meter output in air with a clear beam path.

V_{ref} Meter output with clean water in the path.

Temperature of calibration water: temperature of clean water used to obtain V_{ref} .

Ambient temperature: meter temperature in air during the calibration.

V_{sig} Measured signal output of meter.

Revision L

6/9/09

Acquisition and Processing Information

Processing Specifics

Refer to the InstCoef.txt file along with the specific instrument calibration sheets, both located in the Cal/ directory of the data distribution, for information on how the RVDAS data was collected and processed.

Significant Notes

Radiometric sensors (PIR, PSP, and PAR) were removed prior to the start of this cruise for calibration. They were not replaced because the ship is bound for a shipyard period where the sensors could easily be damaged, scratched, or receive overspray.

Errors and Events

This section lists all significant events and known problems with acquisition during this cruise including instrument failures, data acquisition system failures, and other factors affecting this data set.
(i.e, The PCO₂ system was turned off for the troubleshooting and repairs of the equilibrator pump.)

Cruise Notes: Two radiometers (PAR, and GUV) were not collected during this cruise. The presence of data in their respective fields in such data sets as JGOFS or the met data set (Imwx) is an artifact of the data collection and processing system, and does not imply the presence of valid data.

Day Of Year	Time (GMT)	Event	Location
		There will be no mast GUV or PAR sensors on this cruise. They are both broken and both their replacements are out for calibration.	
285	09:25	START Data logging	@68°West
285	11:58	Seapath gps broken from start of data collection until this point.	
285	12:35 – 12:55	NO DATA RECORDED – Both serial mux boxes crashed due to power surge.	
285	20:24	Restarted Seapath	
290	16:27	Restarted Seapath	
290	17:44	Data Logging OFF	@PAL
290	21:30	New Stbd windbird was installed prior to this cruise. I installed it incorrectly oriented 90 degrees to the west. This was corrected at Palmer Station on day 290. Up until this day, please use Port windbird readings or subtract 90 degrees from Stbd windbird readings.	
291	14:15	Data Logging ON	Leaving PAL
291	15:43	Extreme ice conditions and sea water wall pump turned off by engineers. Data still logging, but pumps not running until we get back to PAL on day 292	

292	14:18	Data Logging OFF	@PAL
295	16:11	Data Logging ON	Leaving PAL
295	16:11	PCO2 system will not collect data for remainder of cruise due to lack of nitrogen tanks.	
303	17:05	Data Logging OFF	@68°West